

# Model 266DRH Differential Model 266HRH Gauge Model 266NRH Absolute

Engineered solutions for all applications

Measurement made easy



**Base accuracy**

— from 0.06 % of calibrated span

**Reliable sensing system coupled with very latest digital technologies**

— provides large turn down ratio up to 60:1

**Comprehensive sensor choice**

— optimize in-use total performance and stability

**Flexible configuration facilities**

— provided locally via local LCD keypad

**New TTG (Through-The-Glass) keypad technology**

— allows quick and easy local configuration without opening the cover, even in explosion proof environments

**IEC 61508 certification**

— version for SIL2 (1oo1) and SIL3 (1oo2) applications

**PED compliance to Sound Engineering Practice (SEP)**

**WirelessHART version**

— the battery powered solution compliant to IEC 62591

**Best-in-class battery life**

— up to 10 years @ 32 s update time  
— in-field replaceable

**Product in compliance with Directive 2011/65/UE (RoHS II)**

**In-built advanced diagnostics**

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

### General description

Models detailed in this data sheet apply for those transmitters which include one or two remote seal(s) connected via a capillary to the transmitter sensor. Depending on the selected ordering code the following models are available:

a) model 266DRH which allows a differential measurement using either

- two remote seals of same type and size or
- one direct mount seal on positive side and one remote seal on negative side, of same type and size or
- one remote seal on positive and a standard threaded connection direct 1/4 in. – 18 NPT on flange or 1/2 in. – 14 NPT through adapter, for the wet or dry leg on negative side opposite to seal, or
- one direct mount seal on positive side and a standard threaded connection direct 1/4 in. – 18 NPT on flange or 1/2 in. – 14 NPT through adapter, for the wet or dry leg on negative side.

b) model 266HRH or 266NRH have the remote or direct mount seal on the positive side and the user can select the suitable code for having the reference at atmospheric or vacuum pressure respectively for gauge or absolute measure.

Direct mount seal is integral to the transducer by a short capillary connection inside a protective rigid tube. This construction forms a standalone single assembly suitable to be mounted to the process by the seal(s) mounting facilities.

All data apply for identical characteristics of the two sides when the transmitter is differential with two seals.

### Remote Seals Overview

The S26 seals are used in combination with 2600T transmitters, allowing differential, gauge or absolute pressure measurements.

Connection of the seal(s) to the relevant transmitter can be achieved as follows :

- directly mounted with a short capillary connecting the „integral“ seal to the transmitter sensor;
- through a capillary system which link the transmitter sensor to a „remote“ seal of any version.

Using seals the transmitter can be selected with

- two seals using same fill fluid, capillary and diaphragm size
- one seal having the other side configured with a process flange for wet/dry leg connection or a blind flange providing vacuum or atmospheric reference.

Model 266HR/NR transmitters have always one remote seal only, with a selectable reference to atmosphere or vacuum respectively for gauge or absolute pressure measurements.

The S26 Series Seal System is a protective device used to isolate 2600T series transmitters from the process fluid.

The seal system provides a flexible diaphragm seal between the process fluid and a liquid filled capillary tube connected to the body of the transmitter. The diaphragm isolates the process fluid while the filled capillary tube hydraulically transmits the process pressure to the transmitter sensor. The capillary of remote seal is corrosion-resistant with robust construction in stainless steel with spiral armour protection, also PVC jacket; PVC protection is always recommended except for high temperature application, where stainless steel armour is suggested. The all welded construction assures reliable operation over the widest range of operating temperature and under vacuum conditions.

For certain applications, use of seal is necessary to prevent the process fluid from leaving its enclosure, due to reasons such as :

- the process fluid has solids in suspension or is highly viscous and can foul impulse lines.
- the process fluid can solidify in impulse lines or the transmitter.
- the process fluid is too hazardous to enter the control area where the transmitter is located.
- the process temperature exceeds the recommended limits for the transmitter.
- the application is interface level or density measurement.

Remote seals offer the required constant and equal specific gravity of the pressure transfer fluid on the high and low sides of the transmitter.

- the transmitter must be located away from the process for easier maintenance.

The S26 series is available with process connections for ASME, EN or JIS pipe flanges, wedge flow elements, chemical tees, and threaded pipe fittings. Extended diaphragm remote seals, suitable for connection to 2in - 3in or 4in flanged tank nozzles or flanged tees, permit the seal diaphragm to be located flush with the inside of a tank or pipe. Sanitary type seals meet the stringent requirements of sanitary food, dairy, pharmaceutical and BioTech applications, offering FDA approved fillings and compliance with 3-A Sanitary Standards.

Fill fluids with FDA are defined as food fills and are Generally Recognized As Safe (GRAS) by the US Food and Drug Administration (FDA).

### **Seal system selection criteria**

Application of an S26 system in direct mount or remote seal configuration to 2600T transmitters affects performances of original devices. Effects are evident in:

- Accuracy
- Temperature effects
- Dynamic response

Accuracy is only marginally affected when seal diaphragm stiffness is relevant compared with sensor stiffness.

This is the only characteristic of the S26 system which has role on accuracy performance. High stiffness of diaphragm associated with low URL might produce increased errors of linearity, hysteresis, and long term stability; when diaphragm stiffness is accuracy related also temperature effects are significantly affected.

Some basic considerations on diaphragm stiffness help understanding effects introduced by S26 system associated with transmitters. This is physically defined by the ratio between the pressure variation applied to the diaphragm and the corresponding volume variation. The stiffness is not linear along the whole diaphragm volumetric displacement, but the S26 design is such to maintain the system linear within the service conditions of the transmitter such as:

- Operating pressure range
- Operating static pressure (for differential transmitters)
- Ambient and process temperature limits

Diaphragm stiffness is a function of material and thickness (elastic coefficient), diameter (type), convolution shape and geometry (design defined).

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

S26 system has effect on temperature performance of the complete transmitter. This effect is mostly on zero of the instrument and is produced by the expansion of the fill fluid into the closed volume formed by the transmitter flange cavity the capillary volume and the remote seal volume. This volume filled with a fluid with specific expansion coefficient; change in temperature of the measuring device produce a volume variation which is absorbed by the remote diaphragm, whose stiffness produces a change in the fluid pressure: this is the zero error. In real application the transmitter/seal system is not the same and stable temperature. Therefore the errors referred in this document for each type of diaphragm and different fluids should be taken as a reference for qualitative evaluation and not a true behaviour in normal application conditions. Should again be recognized that the stiffness of diaphragm and in this case, the thermal coefficient of fluid are the parameter to take into account.

Application of S26 seal to transmitters increases the original time response. The amount of the increase depends from the number of elements and condition of the instrument as follow:

- transmitter sensor range
- physical configuration (i.e. a remote seal on other side)
- type of measure/number of seal (one or two)
- fill fluid viscosity of the S26 system applied
- ambient temperature (affects the transmitter and the capillary) and process temperature on the seal diaphragm
- capillary length

The delay introduced by the seal may be considered as an added constant time to the one of the associated transmitter.

For obtaining the best application solution:

- choose sensor code with URL closest to application SPAN
- select largest diameter diaphragm seal related to URL.
- keep the capillary length as short as possible
- select the fill fluid that suits the most extreme process conditions expected (highest temperature and lowest pressure) and it is compatible with the process fluid.
- In vacuum application, choose always the all welded version and mount the transmitter primary 30 cm/12 inches or more below the bottom seal connection.
- In a two-seal system use the same diaphragm size, capillary length and fill fluid on each side of the transmitter

### Temperature errors optimization (option code DE)

Additional enhanced optimization performed during the production process allows to reduce errors caused by temperature changes on seal. Values detailed in relevant tables can be considered divided by 4 for the following conditions

- difference of capillary errors (per metre) when the two sides have different lengths
- difference of seal errors (process) when the two sides are equipped with different S26 types
- difference of system errors (ambient) when the transmitter uses one direct mount seal and one remote seal.

### Ordering Information

The transmitter and each seal system are each identified by a product code number. These code numbers are stamped on the transmitter nameplate and each character identifies specific product features. Refer to ordering information for a detailed explanation of the product code numbers.

Industrial application in chemical, sanitary, food and any other process industries may require seal configurations and/or process connection different from those reported in this document. Each "special" should be evaluated by ABB to check the correctness and its level of functionality. Ask for the "S26 series seal form" to define precisely the measuring problem and application requirements.

ABB can also cooperate with you by developing a special remote seal for problems requiring individual solutions.

PLEASE CONTACT YOUR LOCAL ABB OFFICE OR REPRESENTATIVE FOR ADDITIONAL INFORMATION, SPECIFIC SEAL DATA AND APPLICABILITY.

The following table shows the types of seals available as remote.

According to the combination SEAL/TRANSMITTER SENSOR the table details the MAXIMUM CAPILLARY LENGTH.

The mnemonics will be used as shortest cross references in the following pages of the data sheet.

Seal model	Seal type	Seal diaphragm size (thickness) [flange type]	Two seals construction									One seal construction									Mnemonic
			SENSOR									SENSOR									
			B	E	F	H	M	P	Q	S	E	F	H	M	P	Q	S	W	Z		
S26WA S26WE	Wafer (ASME and EN standards)	1.5 in. /DN 40	-	-	1	4	5	5	5	5	-	-	3	5	5	5	5	-	P1.5		
		2 in. / DN 50	-	1	3	8	8	10	10	10	-	2	6	8	8	8	8	8	-	P2	
		3 in. / DN 80	1.5	3	6	8	16	16	16	16	1	4	10	10	10	10	10	-	P3		
		1.5 in. /DN 40 (low)	-	1	3	6	6	8	8	8	-	-	4	6	6	6	6	6	-	F1.5	
		2 in. / DN 50 (low)	1	2	4	8	12	16	16	16	1	3	8	12	16	16	16	16	-	F2	
		3 in. / DN 80 (low)	2	5	8	10	16	16	16	16	2	6	10	16	16	16	16	16	-	F3	
S26FA S26FE S26RA S26RE	Flanged flush diaphragm (ASME and EN standards)	2 in. / DN 50	-	1	3	8	8	8	8	-	2	6	8	8	8	8	8	-	P2		
		3 in. / DN 80	1.5	3	6	10	16	16	16	16	1	4	10	10	10	10	10	-	P3		
		4 in. / DN 100	1.5	3	6	10	16	16	16	16	1	4	10	10	10	10	10	-	P3		
		2 in. / DN 50 (low)	1	2	4	10	12	16	16	16	1	3	8	12	16	16	16	16	-	F2	
		3 in. / DN 80 (low)	2	5	8	12	16	16	16	16	2	6	10	16	16	16	16	16	-	F3	
		4 in. / DN 100 (low)	2	5	8	12	16	16	16	16	2	6	10	16	16	16	16	16	-	F3	
S26RE	Flanged extended diaphragm (ASME and EN standards)	2 in. / DN 50	-	1	3	6	6	8	8	-	-	1	4	6	6	6	-	-	E2		
		3 in. / DN 80	1	2	4	8	12	12	12	-	-	3	8	10	10	10	-	-	E3		
		4 in. / DN 100	1.5	3	6	8	16	16	16	16	1	4	10	10	10	10	10	-	P3		
		2 in. / DN 50 [fixed]	-	1	3	6	6	8	8	8	-	-	4	6	6	6	6	-	-	F1.5	
		3 in. / DN 80 [fixed]	2	5	8	10	12	12	12	12	2	6	10	12	12	12	12	-	-	F2.5	
		4 in. / DN100 [fixed]	2	5	8	10	12	12	12	12	2	6	10	12	12	12	12	-	-	F2.5	
S26RJ	Flanged flush diaphragm (JIS standards)	A 50	-	-	3	8	8	8	8	-	2	6	8	8	8	8	-	-	P2		
		A 80	1.5	3	6	8	16	16	16	16	1	4	10	10	10	10	10	-	-	P3	
		A 100	1.5	3	6	8	16	16	16	16	1	4	10	10	10	10	10	-	-	P3	
S26RR	Flanged flush diaphragm (Ring Joint ASME standard)	1.5 in.	-	-	-	4	5	5	5	-	-	3	5	5	5	5	-	-	P1.5		
		2 in.	-	1	3	8	8	8	8	8	-	2	6	8	8	8	8	8	-	P2	
		3 in.	1.5	3	6	8	16	16	16	16	1	4	10	10	10	10	10	10	-	P3	
S26RH	Flanged to ISO 10423 flush diaphragm (API)	1 13/16 in.	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5	5	H1.5		
		2 1/16 in.	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	8	8	P1.5	
S26CN	Flanged Chemical Tee	3 in.	1.5	3	6	8	8	8	8	8	1	4	8	8	8	8	-	-	P3		
S26TT	Threaded off-line flanged	2 1/2 in.	1	2	4	8	12	12	12	12	2	3	8	8	8	8	8	-	T2.5		
S26MA S26ME	Off-line flanged (ASME and EN standards)	2 1/2 in.	1	2	4	8	12	12	12	12	2	3	8	8	8	8	-	-	T2.5		
S26SS	Union nut, Triclamp, Sanitary, Aseptic	2 in. / F50	-	-	1	3	6	6	6	-	-	1	3	6	6	6	-	-	S2		
		3 in. / 4 in. / F80	1.5	3	6	10	10	10	10	-	3	6	10	10	10	10	-	-	S3		
	Cherry Burrell, Cherry Burrell Aseptic	2 in.	-	-	1	3	6	6	6	-	-	1	3	6	6	6	-	-	S2.5		
		3 in. / 4 in.	1.5	3	6	10	10	10	10	-	3	6	10	10	10	10	-	-	S3.5		
S26VN	Saddle and Socket	2 1/2 in.	-	-	-	4	5	5	5	-	-	3	5	5	5	5	-	-	P1.5		
S26UN	Union connection type	1 1/2 in.	-	-	-	-	-	-	-	-	-	-	3	5	5	5	5	-	Z1.5		
S26BN	Button type	1 in.	-	-	-	-	-	-	-	-	-	-	-	-	3	3	3	-	B1		
S26PN	Urea service flanged	1 1/2 in.	-	-	-	-	-	-	-	-	-	-	5	5	5	5	5	-	U1.5		
		2 1/2 in.	-	-	3	6	6	6	6	6	-	3	6	6	6	6	6	6	-	U2.5	

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

The following table shows the types of seals available as direct mount.

According to the combination SEAL/TRANSMITTER SENSOR the table details the compatibility for one direct mount seal construction and the MAXIMUM CAPILLARY LENGTH when a second seal is selected as remote.

The mnemonics will be used as shortest cross references in the following pages of the data sheet.

Seal model	Seal type	Seal diaphragm size (thickness) [flange type]	One direct mount seal									One DM plus one remote seal							Mnemonic	
			SENSOR									SENSOR								
			E	F	H	M	P	Q	S	W	Z	B	E	F	H	M	P	Q		S
S26FA S26FE S26RA S26RE	Flanged flush diaphragm (ASME and EN standards)	2 in. / DN 50	Y	Y	Y	Y	Y	Y	Y	Y	Y	-	1	3	5	8	8	8	8	P2
		3 in. / DN 80	Y	Y	Y	Y	Y	Y	Y	Y	Y	-	3	5	10	10	10	10	10	P3
		4 in. / DN 100	Y	Y	Y	Y	Y	Y	Y	Y	Y	-	3	5	10	10	10	10	10	P3
		2 in. / DN 50 (low)	Y	Y	Y	Y	Y	Y	Y	Y	Y	-	2	4	8	12	16	16	16	F2
		3 in. / DN 80 (low)	Y	Y	Y	Y	Y	Y	Y	Y	Y	2	4	6	12	16	16	16	16	F3
		4 in. / DN 100 (low)	Y	Y	Y	Y	Y	Y	Y	Y	Y	2	4	6	12	16	16	16	16	F3
S26RR	Flanged extended diaphragm (ASME and EN standards)	2 in. / DN 50	-	-	Y	Y	Y	Y	-	-	-	-	-	-	4	6	6	6	-	E2
		3 in. / DN 80	Y	Y	Y	Y	Y	Y	-	-	-	-	2	3	8	10	10	10	-	E3
		4 in. / DN 100	Y	Y	Y	Y	Y	Y	-	-	-	-	3	5	10	10	10	10	-	P3
		2 in. / DN 50 [fixed]	-	-	Y	Y	Y	Y	Y	-	-	-	-	-	3	6	6	6	6	F1.5
		3 in. / DN 80 [fixed]	Y	Y	Y	Y	Y	Y	Y	-	-	-	2	6	10	12	16	16	16	F2.5
		4 in. / DN100 [fixed]	Y	Y	Y	Y	Y	Y	-	-	-	2	6	10	12	16	16	16	F2.5	
S26RJ	Flanged flush diaphragm (JIS standards)	A 50	Y	Y	Y	Y	Y	Y	Y	Y	-	1	3	5	8	8	8	8	P2	
		A 80	Y	Y	Y	Y	Y	Y	Y	Y	-	3	5	10	10	10	10	10	P3	
		A 100	Y	Y	Y	Y	Y	Y	Y	Y	-	3	5	10	10	10	10	10	P3	
S26RR	Flanged flush diaphragm (Ring Joint ASME standard)	1.5 in.	-	-	Y	Y	Y	Y	Y	Y	-	-	-	3	5	5	5	5	P1.5	
		2 in.	Y	Y	Y	Y	Y	Y	Y	Y	-	1	3	5	8	8	8	8	P2	
		3 in.	Y	Y	Y	Y	Y	Y	Y	Y	-	3	5	10	10	10	10	10	P3	
S26RH	Flanged to ISO 10423 flush diaphragm (API)	1 13/16 in.	-	-	-	-	-	-	Y	Y	-	-	-	-	-	-	-	-	H1.5	
		2 1/16 in.	-	-	-	-	-	-	Y	Y	-	-	-	-	-	-	-	-	-	P1.5
S26TT	Threaded off-line flanged	2 1/2 in.	Y	Y	Y	Y	Y	Y	Y	Y	-	-	2	4	8	8	10	10	10	T2.5
S26MA S26ME	Off-line flanged (ASME and EN standards)	2 1/2 in.	Y	Y	Y	Y	Y	Y	Y	Y	-	-	2	4	8	8	10	10	10	T2.5
S26SS	Union nut, Triclam, Sanitary, Aseptic	2 in. / F50	-	-	Y	Y	Y	Y	-	-	-	-	-	3	6	6	6	-	S2	
		3 in. / 4 in. / F80	Y	Y	Y	Y	Y	Y	-	-	-	-	3	4	8	8	8	8	-	S3
	Cherry Burrell, Cherry Burrell Aseptic	2 in.	-	-	Y	Y	Y	Y	-	-	-	-	-	3	6	6	6	-	S2.5	
		3 in. / 4 in.	Y	Y	Y	Y	Y	Y	-	-	-	-	3	4	8	8	8	8	-	S3.5
	Beverage	1 1/2 in.	Y	Y	Y	Y	Y	Y	-	-	-	-	-	-	-	-	-	-	K1.5	
S26VN	Saddle and Socket	2 1/2 in.	-	-	Y	Y	Y	Y	Y	-	-	-	-	-	-	-	-	-	P1.5	
S26JN	In-line type (ONLY DIRECT MOUNT WITH 266HRH / 266NRH)	1 in.	-	-	-	Y	Y	Y	Y	-	-	-	-	-	-	-	-	-	J1	
		1 1/2 in.	-	-	-	Y	Y	Y	Y	-	-	-	-	-	-	-	-	-	J1.5	
		2 in.	-	-	-	Y	Y	Y	Y	-	-	-	-	-	-	-	-	-	J2	
		3 in.	-	-	-	Y	Y	Y	Y	-	-	-	-	-	-	-	-	-	J3	
S26KN	Pulp & Paper application specific (ONLY DIRECT MOUNT WITH 266HRH / 266NRH)	1 in. ball valve (266HRH only)	-	-	Y	Y	Y	Y	-	-	-	-	-	-	-	-	-	-	Y1	
		1 in. (gasketed, NPT, Gas)	-	-	Y	Y	Y	Y	-	-	-	-	-	-	-	-	-	-	-	M1
		1 in. (NPT, Gas)	-	-	Y	Y	Y	Y	Y	-	-	-	-	-	-	-	-	-	-	M1
		1 1/2 in. (gasketed)	-	Y	Y	Y	Y	Y	-	-	-	-	-	-	-	-	-	-	-	M1.5
		1 1/2 in. (NPT - Gas)	-	Y	Y	Y	Y	Y	Y	-	-	-	-	-	-	-	-	-	-	M1.5A
		1 1/2 in. (M44 thread)	-	Y	Y	Y	Y	Y	-	-	-	-	-	-	-	-	-	-	M1.5B	

## Functional Specifications

### Range and span limits

Sensor Code	Upper Range Limit (URL)	Lower Range Limit (LRL)			266NRH absolute	Minimum span	
		266DRH differential	266DRH gauge	266HRH gauge		266HRH or 266NRH with S26KN	
B	4 kPa 40 mbar 16 inH2O	-4 kPa -40 mbar -16 inH2O				0.2 kPa 2 mbar 0.8 inH2O	
E	16 kPa 160 mbar 64 inH2O	-16 kPa -160 mbar -64 inH2O	-16 kPa -160 mbar -64 inH2O			0.8 kPa 8 mbar 3.2 inH2O	
F	40 kPa 400 mbar 160 inH2O	-40 kPa -400 mbar -160 inH2O	-40 kPa -400 mbar -160 inH2O	-40 kPa -400 mbar -160 inH2O	0 abs	0.67 kPa 6.7 mbar 2.67 inH2O	1.34 kPa 13.4 mbar 5.34 inH2O
H	160 kPa 1600 mbar 642 inH2O	-160 kPa -1600 mbar -642 inH2O	-100 kPa (\$) -1 bar (\$) -14.5 psi (\$)	-100 kPa (\$) -1 bar (\$) -14.5 psi (\$)	0 abs	2.67 kPa 26.7 mbar 10.7 inH2O	5.34 kPa 53.4 mbar 21.4 inH2O
M	600 kPa 6 bar 87 psi	-600 kPa -6 bar -87 psi	-100 kPa (\$) -1 bar (\$) -14.5 psi (\$)	-100 kPa (\$) -1 bar (\$) -14.5 psi (\$)	0 abs	10kPa 0.1 bar 1.45 psi	20 kPa 0.2 bar 2.9 psi
P	2400 kPa 24 bar 348 psi	-2400 kPa -24 bar -348 psi	-100 kPa (\$) -1 bar (\$) -14.5 psi (\$)	-100 kPa (\$) -1 bar (\$) -14.5 psi (\$)	0 abs	40 kPa 0.4 bar 5.8 psi	80 kPa 0.8 bar 11.6 psi
Q	8000 kPa 80 bar 1160 psi	-8000 kPa -80 bar -1160 psi	-100 kPa (\$) -1 bar (\$) -14.5 psi (\$)	-100 kPa (\$) -1 bar (\$) -14.5 psi (\$)	0 abs	134 kPa 1.34 bar 19.4 psi	267 kPa 2.67 bar 38.7 psi
S	16000 kPa 160 bar 2320 psi	-16000 kPa -160 bar -2320 psi	-100 kPa (\$) -1 bar (\$) -14.5 psi (\$)	-100 kPa (\$) -1 bar (\$) -14.5 psi (\$)	0 abs	267 kPa 2.67 bar 38.7 psi	534 kPa 5.34 bar 77.4 psi
W	70000 kPa 700 bar 10150 psi			-100 kPa (\$) -1 bar (\$) -14.5 psi (\$)		1400 kPa 14 bar 203 psi	
Z	105000 kPa 1050 bar 15225 psi			-100 kPa (\$) -1 bar (\$) -14.5 psi (\$)		10500 kPa 105 bar 1522 psi	

(\$) with atmospheric pressure reference of 100 kPa, 1 bar, 14.5 psi.

#### Span limits

Maximum span = URL (can be further adjusted up to  $\pm$  URL (TD = 0.5) for differential models, within the range limits)  
IT IS RECOMMENDED TO SELECT THE TRANSMITTER SENSOR CODE PROVIDING THE TURNDOWN VALUE AS LOWEST AS POSSIBLE TO OPTIMIZE PERFORMANCE CHARACTERISTICS.

#### Zero suppression and elevation

Zero and span can be adjusted to any value within the range limits detailed in the table as long as:  
— calibrated span  $\geq$  minimum span

#### Damping (feature not available for WirelessHART version)

Selectable time constant : between 0 and 60 s  
This is in addition to sensor response time.

#### Turn on time

Operation within specification in less than 10 s with minimum damping.

#### Insulation resistance

> 100 M $\Omega$  at 500 V DC (terminals to earth)

# Model 266DRH Differential

# Model 266HRH Gauge

# Model 266NRH Absolute

## Operative limits

**REFER ALSO TO S26X DATA PAGES FOR POSSIBLE FURTHER LIMITATIONS DUE TO SEAL VARIANTS**

### Pressure limits:

#### Overpressure limits

Without damage to the transmitter

Model 266DRH	Fill fluid	Overpressure limits
Sensor F to S	Silicone oil	0.07 kPa abs, 0.7 mbar abs, 0.5 mmHg and 21 MPa, 210 bar, 3045 psi <sup>(1)</sup>
Sensor F to Q 266DRH High Static	Silicone oil	0.07 kPa abs, 0.7 mbar abs, 0.5 mmHg and 42 MPa, 420 bar, 6090 psi
Sensor E	Silicone oil	0.07 kPa abs, 0.7 mbar abs, 0.5 mmHg and 16 MPa, 160 bar, 2320 psi
Sensor B (266DRH only)	Silicone oil	0.07 kPa abs, 0.7 mbar abs, 0.5 mmHg and 7 MPa, 70 bar, 1015 psi
Sensor F to S	Inert (Galden)	0.135 kPa abs, 1.35 mbar abs, 1 mmHg and 21 MPa, 210 bar, 3045 psi <sup>(1)</sup>
Sensor E	Inert (Galden)	0.135 kPa abs, 1.35 mbar abs, 1 mmHg and 16 MPa, 160 bar, 2320 psi
Sensor F to S	Inert (Halocarbon)	0.4 kPa abs, 4 mbar abs, 3 mmHg and 21 MPa, 210 bar, 3045 psi <sup>(1)</sup>
Sensor F to Q 266DRH High Static	Inert (Halocarbon)	0.4 kPa abs, 4 mbar abs, 3 mmHg and 42 MPa, 420 bar, 6090 psi
Sensor E	Inert (Halocarbon)	0.4 kPa abs, 4 mbar abs, 3 mmHg and 16 MPa, 160 bar, 2320 psi

(1) 16 MPa, 160 bar, 2320 psi for AISI 316 ss NACE bolting

Models 266HRH and 266NRH	Fill fluid	Overpressure limits
Sensor P, Q, S	Silicone oil	0.07 kPa abs, 0.7 mbar abs, 0.5 mmHg and 21 MPa, 210 bar, 3045 psi
Sensor F, H, M	Silicone oil	0.07 kPa abs, 0.7 mbar abs, 0.5 mmHg and 14 MPa, 140 bar, 2030 psi
Sensor P, Q, S	Inert (Galden)	0.135 kPa abs, 1.35 mbar abs, 1 mmHg and 21 MPa, 210 bar, 3045 psi
Sensor F, H, M	Inert (Galden)	0.135 kPa abs, 1.35 mbar abs, 1 mmHg and 14 MPa, 140 bar, 2030 psi
Sensor P, Q, S	Inert (Halocarbon)	0.4 kPa abs, 4 mbar abs, 3 mmHg and 21 MPa, 210 bar, 3045 psi
Sensor F, H, M	Inert (Halocarbon)	0.4 kPa abs, 4 mbar abs, 3 mmHg and 14 MPa, 140 bar, 2030 psi
Sensor W (266HRH only)	Silicone oil	0.07 kPa abs, 0.7 mbar abs, 0.5 mmHg and 105 MPa, 1050 bar, 15225 psi
Sensor Z (266HRH only)	No filling	0.07 kPa abs, 0.7 mbar abs, 0.5 mmHg and 135 MPa, 1350 bar, 19570 psi

## Static pressure limits

Transmitters for differential pressure model 266DRH operates within specifications between the following limits:

Sensors	Static pressure limits
Sensor F to S with 2 seals	0.07 kPa abs, 0.7 mbar abs, 0.5 mmHg and 21 MPa, 210 bar, 3045 psi <sup>(1)</sup>
Sensor F to Q 266DRH high static with 2 seals	0.07 kPa abs, 0.7 mbar abs, 0.5 mmHg and 42 MPa, 420 bar, 6090 psi
Sensor F to S with 1 seal	1.3 kPa abs, 13 mbar abs, 0.2 psia and 21 MPa, 210 bar, 3045 psi <sup>(1)</sup>
Sensor E with 2 seals	0.07 kPa abs, 0.7 mbar abs, 0.5 mmHg and 16 MPa, 160 bar, 2320 psi
Sensor E with 1 seal	1.3 kPa abs, 13 mbar abs, 0.2 psia and 16 MPa, 160 bar, 2320 psi
Sensor B with 2 seals	0.07 kPa abs, 0.7 mbar abs, 0.5 mmHg and 7 MPa, 70 bar, 1015 psi
Sensor B with 1 seal	1.3 kPa abs, 13 mbar abs, 0.2 psia and 7 MPa, 70 bar, 1015 psi

(1) 16 MPa, 160 bar, 2320 psi for AISI 316 ss NACE bolting

## Proof pressure

The transmitter can be exposed without leaking to line pressure of up to

Model	Sensor	Proof pressure
266DRH	Sensor F to S	40.25 MPa, 402.5 bar, 5836 psi
	Sensor F to Q high static	77 MPa, 770 bar, 11165 psi
	Sensor E	31.5 MPa, 315 bar, 4567 psi
	Sensor B	14 MPa, 140 bar, 2030 psi
266HRH	Sensor F, H, M	28 MPa, 280 bar, 4060 psi
266NRH	Sensor P, Q, S	40.25 MPa, 402.5 bar, 5836 psi
266HRH	Sensor W	171.5 MPa, 1715 bar, 24868 psi
	Sensor Z	210.5 MPa, 2105 bar, 30522 psi

or two times the flange rating of seal, whichever is less.

Meet ANSI/ISA-S 82.03 hydrostatic test requirements.



Overpressure and static upper limit can be derated by the flange rating of seal, as follows

Seal model S26RE to EN 1092-1	Carbon steel flange @ 120 °C	AISI 316 ss flange @ 20 °C
PN 16	16 bar	16 bar
PN 40	40 bar	40 bar
PN 63	63 bar	63 bar
PN 100	100 bar	100 bar

Seal model S26RA and S26RR to ASME B16.5	Carbon Steel @ 100 °F (38 °C)	AISI 316 ss flange @ 100 °F (38 °C)
Class 150	285 psi	275 psi
Class 300	740 psi	720 psi
Class 600	1480 psi	1440 psi
Class 900	2220 psi	2160 psi
Class 1500	3705 psi	3600 psi
Class 2500	6170 psi	6000 psi

Seal model S26RJ to JIS B 2220	Carbon steel flange @ 120 °C	AISI 316 ss flange @ 120 °C
10K	14 bar	14 bar
20K	36 bar	36 bar
40K	68 bar	68 bar

Seal model S26RH to ISO1 0423 (API 6A)	AISI 316 ss flange	
	-29 ... 38 °C (-20 ... 100 °F)	@ 93 °C (200 °C)
API 10000	69.5 MPa, 10000 psi	60 MPa, 8687 psi
API 15000	103.5 MPa, 15000 psi	89.2 MPa, 12937 psi

Seal model S26FE to EN 1092-1	AISI 316 L ss flange @ 20 °C
PN 16	16 bar
PN 40	40 bar
PN 63	63 bar
PN 100	100 bar

Seal model S26FA to ASME B16.5	AISI 316 L ss flange @ 100 °F (38 °C)
Class 150	230 psi
Class 300	600 psi
Class 600	1200 psi

Seal model S26ME to EN 1092-1	AISI 316 ss or Hastelloy C flange
PN 16 / 40	40 bar @ 25 °C (77 °F)

Seal model S26MA to ASME B16.5	AISI 316 L ss flange @ 25 °C (77 °F)	Hastelloy C flange @ 25 °C (77 °F)
Class 150	230 psi	290 psi
Class 300	600 psi	750 psi

The pressure limit decreases with increasing temperature above to the specified values as defined for the material, respectively for ASME B16.5, EN 1092-1, JIS or ISO 10423 standards.

Seal model S26TT bolting	Temperature range	Pressure limit
AISI 316 ss or Carbon steel	0 ... 100 °C (32 ... 212 °F)	21 MPa, 210 bar, 3045 psi
	-60 ... 0 °C (-76 ... 32 °F)	16 MPa, 160 bar, 2320 psi
	100 ... 360 °C (212 ... 680 °F)	16 MPa, 160 bar, 2320 psi
Alloy steel	0 ... 37.8 °C (32 ... 100 °F)	21 MPa, 210 bar, 3045 psi
	-48.3 ... 0 °C (-55 ... 32 °F)	16 MPa, 160 bar, 2320 psi
	37.8 ... 360 °C (100 ... 680 °F)	13 MPa, 130 bar, 1885 psi

Seal model S26SS	Pressure limit
Triclamp 2 in.	3.8 MPa, 38 bar, 550 psi
Triclamp 3 in.	2.4 MPa, 24 bar, 350 psi
Triclamp 4 in.	1.7 MPa, 17 bar, 250 psi
Union nut F50	2.5 MPa, 25 bar, 360 psi
Union nut F80	2.5 MPa, 25 bar, 360 psi
Cherry Burrel 2 in.	1.9 MPa, 19 bar, 275 psi
Cherry Burrel 3 in.	1.9 MPa, 19 bar, 275 psi
Cherry Burrel 4 in.	1.9 MPa, 19 bar, 275 psi
Sanitary flush 4 in.	1.9 MPa, 19 bar, 275 psi
Sanitary extended 4 in.	1.9 MPa, 19 bar, 275 psi
Beverage bolted type 1 1/2 in.	4 MPa, 40 bar, 580 psi
V-band clamp option	1 MPa, 10 bar, 145 psi
4in schedule 5 V-band clamp option	0.7 MPa, 7 bar, 100 psi

#### Seal model S26WA to ASME B16.5

up to 41.37 MPa, 413.7 bar, 6000 psi  
but not greater than rating of mounting flange (NOT SUPPLIED)

Seal model S26WE to EN 1092-1	Pressure limit
Form B1	40 MPa, 400 bar, 5800 psi
Form D	16 MPa, 160 bar, 2320 psi
Form E	10 MPa, 100 bar, 1450 psi

but not greater than rating of mounting flange (NOT SUPPLIED)

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

<b>Seal model S26CN</b>	
2 MPa, 20 bar, 290 psi	

<b>Seal model S26BN</b>	<b>Temp limits of 20 and 120 °C (68 and 248 °F)</b>
Types 89, 90 and 92	42 MPa, 420 bar, 6090 psi
Types 91	35 MPa, 350 bar, 5075 psi

<b>Seal model S26VN bolting</b>	<b>Temperature range</b>	<b>Pressure limit</b>
Alloy steel	0 ... 37.8 °C (32 ... 100 °F)	16 MPa, 160 bar, 2320 psi
	-48.3 ... 0 °C (-55 ... 32 °F)	10 MPa, 100 bar, 1450 psi
	37.8 ... 360 °C (100 ... 680 °F)	10 MPa, 100 bar, 1450 psi

<b>Seal model S26UN</b>	
Union Connection	10.3 MPa, 103 bar, 1500 psi
With Chemical Tee Flange	2 MPa, 20 bar, 300 psi

<b>Seal model S26PN</b>	
3 in. ASME 600 integral flange	8 MPa, 80 bar, 1160 psi
2 in. ASME 2500 threaded flange	32 MPa, 320 bar, 4640 psi

<b>Seal model S26JN</b>	
up to 16 MPa, 160 bar, 2320 psi	
but not greater than rating of mounting flange (NOT SUPPLIED)	

<b>Seal model S26KN</b>	
1 in seal - sealing with gaskets	3 MPa, 30 bar, 435 psi
1 1/2 in seals - sealing with gasket	5 MPa, 50 bar, 725 psi
1 in seal with ball valve connection	4 MPa, 40 bar, 580 psi
1 in NPT, 1 1/2 in NPT	34.5 MPa, 345 bar, 5000 psi
G 1 in A, G 1 1/2 in A	60 MPa, 600 bar, 8700 psi

<b>Flushing ring gasket material</b>	<b>Process limits</b>		
	<b>Pressure (max.)</b>	<b>Temperature</b>	<b>P x T</b>
Garlock	6.9 MPa, 69 bar, 1000 psi	-73 and 204 °C (-100 and 400 °F)	250000 ( °F x psi)
Graphite	2.5 MPa, 25 bar, 362 psi	-100 and 380 °C (-148 and 716 °F)	
PTFE	6 MPa, 60 bar, 870 psi	-100 and 250 °C (-148 and 482 °F)	

### Vacuum service for seals

Full vacuum subject to fill fluid limits.

Refer to FILL FLUID CHARACTERISTICS table.

Minimum pressure with seal tantalum diaphragm is 1 kPa abs, 10 mbar abs, 0.15 psia.

### Temperature limits °C (°F):

#### Ambient

is the operating temperature

<b>Model 266DRH</b>	<b>Ambient temperature limits</b>
Silicone oil for sensor F to S	-40 and 85 °C (-40 and 185 °F)
Silicone oil for sensor B and E	-25 and 85 °C (-13 and 185 °F)
Inert (Galden) for sensor F to S	-20 and 85 °C (-4 and 185 °F)
Inert (Galden) for sensor E	-10 and 85 °C (14 and 185 °F)
Inert (Halocarbon) for sensor F to S	-20 and 85 °C (-4 and 185 °F)
Inert (Halocarbon) for sensor E	-10 and 85 °C (14 and 185 °F)

<b>Models 266HRH - 266NRH</b>	<b>Ambient temperature limits</b>
Silicone oil for sensor F to W	-40 and 85 °C (-40 and 185 °F)
Inert (Galden) for sensor F to S	-20 and 85 °C (-4 and 185 °F)
Inert (Halocarbon) for sensor F to S	-20 and 85 °C (-4 and 185 °F)
Sensor Z without filling	-40 and 85 °C (-40 and 185 °F)

<b>Models 266XRH</b>	<b>Ambient temperature limits</b>
LCD integral display	-40 and 85 °C (-40 and 185 °F)
LCD display may not be clearly readable below -20 °C (-4 °F) or above +70 °C (+158 °F)	

<b>Models 266XRH</b>	<b>Ambient temperature limit</b>
Painted AISI 316 L ss housing	max 70 °C (158 °F) continuous

### IMPORTANT

For Hazardous Atmosphere applications see the temperature range specified on the certificate/approval relevant to the aimed type of protection

### Process - transmitter

<b>Model 266DRH (side without seal)</b>	<b>Process temperature limits</b>
Silicone oil for sensor F to S	-40 and 121 °C (-40 and 250 °F) <sup>(1)</sup>
Silicone oil for sensor B and E	-25 and 121 °C (-13 and 250 °F) <sup>(1)</sup>
Inert (Galden) for sensor F to S	-20 and 100 °C (-4 and 212 °F) <sup>(2)</sup>
Inert (Galden) for sensor E	-10 and 100 °C (14 and 212 °F) <sup>(2)</sup>
Inert (Halocarbon) for sensor F to S	-20 and 100 °C (-4 and 212 °F) <sup>(2)</sup>
Inert (Halocarbon) for sensor E	-10 and 100 °C (14 and 212 °F) <sup>(2)</sup>
Viton gasket	-20 and 121 °C (-4 and 250 °F)

(1) 100 °C (212 °F) for application below atmospheric pressure

(2) 65 °C (150 °F) for application below atmospheric pressure

## Process - seal

Refer to the following FILL FLUID CHARACTERISTICS table detailing characteristics of fill fluids when used in transmitters with seal(s) and further limitation for specific models and/or variants.

Fill fluid (application)	Process temperature and pressure limits				Specifications @ 25 °C (77°F)		
	Tmax °C (°F) @ Pabs > of	Pmin mbar abs (mmHg)	Tmax °C (°F) @ Pmin	Tmin °C (°F)	Specific gravity (kg/dm <sup>3</sup> )	Kinematic viscosity (cst)	Thermal expansion (x 10 <sup>-3</sup> /°C)
Silicone oil PMX 200 10 cSt	250 (480) @ 385 mbar	0.7 (0.5)	130 (266)	-40 (-40)	0.934	10	1.08
Silicone oil Baysilone PD5 5 cSt	250 (480) @ 900 mbar	0.7 (0.5)	45 (113)	-85 (-121)	0.923	5	0.98
Inert oil Galden G5 (oxygen service)	160 (320) @ 1 bar	2.1 (1.52)	60 (140)	-20 (-4)	1.82	4.4	1.1
Inert oil Halocarbon 4.2 (oxygen service)	180 (356) @ 425 mbar	4 (3)	70 (158)	-20 (-4)	1.87	6.3	0.864
Silicone polymer Syltherm XLT (cryogenic service)	100 (212) @ 118 mbar	2.1 (1.52)	20 (68)	-100 (-148)	0.852	1.4	1
Silicone oil for high temperature (for REMOTE SEAL)	375 (707) @ 1 bar	0.7 (0.5)	220 (428)	-10 (14)	1.07	39	0.77
Silicone oil for high temperature (for DIRECT MOUNT SEAL)	250 (480) @ 3.5 mbar	0.7 (0.5)	220 (428)	-10 (14)	1.07	39	0.77
Vegetable oil Neobee M-20 (food - sanitary) FDA approved	200 (390) @ 1 bar	10 (7.2)	20 (68)	-18 (0)	0.92	9.8	1.2
Mineral oil Esso Marcol 152 (food - sanitary) FDA approved	250 (480) @ 630 mbar	0.7 (0.5)	110 (230)	-6 (21)	0.86	30	0.80
Glycerin Water 70% (food - sanitary) FDA approved	93 (200) @ 1 bar	1000 (760)	93 (200)	-7 (20)	1.08	2	0.36

Absolute viscosity (cP) = Kinematic Viscosity (cSt) x Specific gravity at specified temperature.

The absolute viscosity value is used for response time calculation.

Material	Process temperature limits
Tantalum diaphragm	260 °C (500 °F) max.
PFA anti-stick coating	204 °C (400 °F) max.
PFA anti-corrosion/anti-stick coating	250 °C (482 °F) max.
AISI gold plated diaphragm	320 °C (608 °F) max.
PTFE gasket	-100 and 260 °C (-148 and 500 °F)
Viton gasket	-20 and 260 °C (-4 and 500 °F)
graphite gasket (except S26CN)	-100 and 360 °C (-148 and 680 °F)
graphite gasket for S26CN	-100 and 340 °C (-148 and 644 °F)
Silicone rubber gasket	-50 and 204 °C (-58 and 400 °F)
Ethylene Propylene gasket	-40 and 149 °C (-40 and 300 °F)
Ethylene Propylene gasket	-40 and 121 °C (-40 and 250 °F)
EPDM 3-A 18-03 Class II	

Seals model (mnemonic)	Process temperature limits
S26JN In-line type (J1, J1.5, J2, J3)	-40 and 180 °C (-40 and 356 °F)
S26KN Pulp & Paper (M1, M1.5 all)	-40 and 150 °C (-40 and 302 °F)
S26KN Pulp & Paper (Y1)	-20 and 130 °C (-4 and 266 °F)
S26SS Beverage (K1.5)	-40 and 150 °C (-40 and 302 °F)
S26SS with Ethylene Propylene gasket EPDM 3-A 18-03 Class II	-40 and 121 °C (-40 and 250 °F)
S26SS with Ethylene Propylene gasket	-40 and 149 °C (-40 and 300 °F)
S26XX with PFA anti-stick coating	max. 204 °C (max 400 °F)

## Storage

Models 266XRH	Storage temperature limits
Storage limits	-50 and 85 °C (-58 and 185 °F)
LCD integral display	-40 and 85 °C (-40 and 185 °F)

# Model 266DRH Differential

# Model 266HRH Gauge

# Model 266NRH Absolute

## Environmental limits

### Electromagnetic compatibility (EMC)

Comply with 2014/30/UE to standards EN 61326-1:2013.  
For IEC 61508 SIL certified transmitter to EN 61326-3-1:2008.  
For transmitter with option "YE" to NAMUR NE 021 (2004).  
Surge immunity level (with surge protector): 4 kV  
(according to IEC 61000-4-5 EN 61000-4-5)

### Pressure equipment directive (PED)

Comply with 2014/68/UE to standards ANSI/ISA 61010-1:2012 following Sound Engineering Practice (SEP).

### Humidity

Relative humidity: up to 100 %  
Condensing, icing: admissible

### Vibration resistance

Accelerations up to 2 g at frequency up to 1000 Hz  
(according to IEC 60068-2-6)

### Shock resistance

Acceleration: 50 g  
Duration: 11 ms  
(according to IEC 60068-2-27)

### Wet and dust-laden atmospheres

The transmitter is dust and sand tight and protected against immersion effects as defined by IEC 60529 (2001) to IP 67 (IP 68 on request) or by NEMA Type 4X.  
IP65 with Harting Han connector.  
Aluminium and AISI housings as barrel version also comply to IP 66 as defined by IEC 60529 (2001).

## Hazardous atmospheres

### (FOR ALL VERSIONS EXCEPT WirelessHART)

With or without integral display

---

INTRINSIC SAFETY Ex ia:

ATEX Europe (code E1) approval

II 1 G Ex ia IIC T6...T4 Ga and II 1/2 G Ex ia IIC T6...T4 Ga/Gb and II 1 D Ex ia IIIC T85 °C Da and II 1/2 D Ex ia IIIC T85 °C Da; IP67.

IECEx (code E8) approval

Ex ia IIC T6...T4 Ga and Ex ia IIIC T85 °C Da; IP67.

NEPSI China (code EY)

Ex ia IIC T4/T5/T6 Ga, Ex ia IIC T4/T5/T6 Ga/Gb,

Ex iaD 20 T85/T100/T135, Ex iaD 20/21 T85/T100/T135.

---

EXPLOSION PROOF:

ATEX Europe (code E2) approval

II 1/2 G Ex db IIC T6 Ga/Gb Ta=-50 °C to +75 °C and

II 1/2 D Ex tb IIIC T85 °C Db Ta = -50 °C to +75 °C; IP67.

IECEx (code E9) approval

Ex db IIC T6 Ga/Gb Ta=-50 °C to +75 °C and

Ex tb IIIC T85 °C Db Ta = -50 °C to +75 °C; IP67.

NEPSI China (code EZ)

Ex d IIC T6 Gb, Ex tD A21 IP67 T85 °C.

---

INTRINSIC SAFETY Ex ic:

ATEX Europe (code E3 ) type examination

II 3 G Ex ic IIC T6...T4 Gc and II 3 D Ex tc IIIC T85 °C Dc; IP67.

IECEx (code ER) type examination

Ex ic IIC T6...T4 Gc and Ex tc IIIC T85 °C Dc; IP67.

NEPSI China (code ES) type examination

Ex ic IIC T4~T6 Gc, Ex nA IIC T4~T6 Gc, Ex tD A22 IP67 T85 °C.

---

## Hazardous atmospheres

### (FOR ALL VERSIONS EXCEPT WirelessHART)

With or without integral display

FM Approvals US (code E6) and FM Approvals Canada (code E4):

- Explosionproof (US): Class I, Division 1, Groups A, B, C, D; T5
- Explosionproof (Canada): Class I, Division 1, Groups B, C, D; T5
- Dust-ignitionproof: Class II, Division 1, Groups E, F, G; Class III, Div. 1; T5
- Flameproof (US): Class I, Zone 1 AEx d IIC T4 Gb
- Flameproof (Canada): Class I, Zone 1 Ex d IIC T4 Gb
- Nonincendive: Class I, Division 2, Groups A, B, C, D T6...T4
- Energy limited (US): Class I, Zone 2 AEx nC IIC T6...T4
- Energy limited (Canada): Class I, Zone 2 Ex nC IIC T6...T4
- Intrinsically safe: Class I, II, III, Division 1, Groups A, B, C, D, E, F, G T6...T4
  - Class I, Zone 0 AEx ia IIC T6...T4 (US)
  - Class I, Zone 0 Ex ia IIC T6...T4 (Canada)

Type 4X, IP67 for all above markings.

COMBINED FM Approvals US and Canada

- Intrinsically safe (code EA)

COMBINED ATEX, FM and IECEx Approvals (code EN)

Technical Regulations Customs Union EAC (Russia, Kazakhstan, Belarus),  
Inmetro (Brazil), Kosha (Korea)

## Hazardous atmospheres

### (ONLY FOR WirelessHART VERSION)

With or without integral display

INTRINSIC SAFETY:

ATEX Europe (code E1) approval

II 1 G Ex ia IIC T4 and II 1/2 G Ex ia IIC T4.

IECEx (code E8) approval

Ex ia IIC T4.

FM Approvals US and FM Approvals Canada:

- Intrinsically safe: Class I, Div. 1, Groups A, B, C, D; T4 (code EA)
  - Class I, Zone 0 AEx ia IIC T4, Gb (FM US)
  - Class I, Zone 0 Ex ia IIC T4, Gb (FM Canada)

IMPORTANT

REFER TO CERTIFICATES FOR AMBIENT TEMPERATURE RANGES RELATED TO THE DIFFERENT TEMPERATURE CLASSES.

## Electrical Characteristics and Options

### Optional indicators

#### Integrated digital display

(code LS; only with HART standard functionality)

Wide screen LCD, 128 x 64 pixel,  
52.5 x 27.2 mm (2.06 x 1.07 in.) dot matrix.

Two keys for zero/span or without keypad.

User selectable application-specific visualizations.

Display may also indicate static pressure, sensor temperature and diagnostic messages.



#### Integral display with integral keypad

(code L1; not with HART standard functionality)

Wide screen LCD, 128 x 64 pixel,  
52.5 x 27.2 mm (2.06 x 1.07 in.) dot matrix.

Multilanguage. Four keys for configuration and management of device.

Easy setup for quick commissioning.

User selectable application-specific visualizations.

Totalized and instantaneous flow indication.

Display may also indicate static pressure, sensor temperature and diagnostic messages and provides configuration facilities.



#### Integral display with Through-The-Glass (TTG) activated keypad (code L5; not with HART standard functionality)

As above integral display but equipped with the innovative TTG keypad allowing the activation of the configuration and management menus of the device without the need of removing the transmitter housing cover. TTG keypad is protected against accidental activations.



### Optional surge protection

Up to 4kV

- voltage 1.2  $\mu$ s rise time / 50  $\mu$ s delay time to half value
- current 8  $\mu$ s rise time / 20  $\mu$ s delay time to half value

### Process diagnostics (PILD)

Plugged impulse line detection (PILD) generates a warning via communication (HART, PA, FF). The device can be configured to drive the output to "Alarm current" or set a status "BAD".

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

### HART® digital communication and 4 to 20 mA output Standard and Advanced functionality

Device type: 1a07<sub>hex</sub> (listed with HCF)

#### Power supply

The transmitter operates from 10.5 to 42 V DC with no load and is protected against reverse polarity connection (additional load allows operations over 42 V DC). For Ex ia and other intrinsically safe approval power supply must not exceed 30 V DC. Minimum operating voltage increases to 12.3 V DC with optional surge protector or to 10.8 V DC with optional conformity to NAMUR NE 21 (2004).

#### Ripple

20 mV max on a 250 Ω load as per HART specifications.

#### Load limitations

4 to 20 mA and HART total loop resistance :

$$R \text{ (k}\Omega\text{)} = \frac{\text{Supply voltage} - \text{min. operating voltage (V DC)}}{22 \text{ mA}}$$

A minimum of 250 Ω is required for HART communication.

#### Output signal

Two-wire 4 to 20 mA, user-selectable for linear or square root output, power of  $\sqrt[3]{2}$  or  $\sqrt[5]{2}$ , square root for bidirectional flow, 22 points linearization table (i.e. for horizontal or spherical tank level measurement).

HART® communication provides digital process variable superimposed on 4 to 20 mA signal, with protocol based on Bell 202 FSK standard.

HART revision 5 is the default HART output.

HART revision 7 is available on request.

#### Output current limits (to NAMUR NE 43 standard)

Overload condition

- Lower limit: 3.8 mA (configurable from 3.8 to 4 mA)
- Upper limit: 20.5 mA (configurable from 20 to 21 mA)

Alarm current

- Lower limit: 3.6 mA (configurable from 3.6 to 4 mA)
- Upper limit: 21 mA (configurable from 20 to 23 mA, limited to 22 mA for HART Safety; apply for electronics release 7.1.15 or later)

Factory setting: high alarm current

### IEC 62591 WirelessHART® output

Device type: 1a06<sub>hex</sub> (listed with HCF)

Network ID: ABB<sub>hex</sub> (2747 decimal)

Join keys: 57495245<sub>hex</sub> (1464422981) 4c455353<sub>hex</sub> (1279611731)  
4649454c<sub>hex</sub> (1179206988) 444b4559<sub>hex</sub> (1145783641).

#### Power Supply

1x D-cell size lithium-thionyl chloride battery.

Battery life: 10 years at 32 sec. update time, 8 years at 16 sec. update time or 5 years at 8 sec. update time.

(at reference conditions of 25 ± 2 °C ambient temperature, data routed from 3 additional devices, LCD off).

THE BATTERY CAN BE REPLACED IN FIELD, ALSO IN HAZARDOUS CLASSIFIED AREA.

#### Output signal

IEC 62591 WirelessHART Version 7.5 (IEEE 802.15.4-2006);

Frequency band: 2.4 GHz DSSS

Update rate: user selectable from 1 sec. to 60 min.

#### Integrated adjustable omnidirectional antenna

- Output radio frequency: maximum 10 mW (10 dBm) EIRP
- Range: up to 300 m. (328 yds.)

Minimum distance between antenna and person is 0.2 m. (8 in.)

#### Telecommunications directive

Every wireless measuring device must be certified in accordance with the telecommunications directive, in this case the frequency range. This certification is country-specific.

#### European directives

Radio Equipment & Telecommunications Terminal Equipment Directive 2014/53/UE to standards EN 60950-1:2013, EN 62311:2008, EN 301 489-1 V1.9.2, EN 301 489-17 V2.2.1, EN 300 328 v1.8.1.

In Europe, use of the 2400 - 2483.5 MHz frequency band is not harmonized. Country-specific regulations must be observed.

#### Restrictions for Norway

Operation not permitted within a radius of 20 km around Ny-Alesund in Svalbard. For more information, see [www.npt.no](http://www.npt.no) Norway Posts and Telecommunications site

#### Extra-european radio frequency licences

USA to FCC Part 15.247:2009;

Canada to IC RSS-210 and ICES-003;

Argentina; United Arab Emirates (UAE)

## FOUNDATION Fieldbus™ output

### Device type

LINK MASTER DEVICE

Link Active Scheduler (LAS) capability implemented.

Manufacturer code: 000320<sub>hex</sub>

Device type code: 0007<sub>hex</sub>

### Power supply

The transmitter operates from 9 to 32 V DC, polarity independent, with or without surge protector.

For Ex ia approval power supply must not exceed 24 V DC (FF-816 certification) or 17.5 V DC (FISCO certification).

### Current consumption

operating (quiescent): 15 mA

fault current limiting: 20 mA max.

### Output signal

Physical layer in compliance to IEC 61158-2/EN 61158-2.

Transmission to Manchester II modulation, at 31.25 kbit/s.

### Function blocks/execution period

3 enhanced Analog Input blocks/25 ms max (each)

1 enhanced PID block/40 ms max.

1 standard ARithmetic block/25 ms

1 standard Input Selector block/25 ms

1 standard Control Selector block/25 ms

1 standard Signal Characterization block/25 ms

1 standard Integrator/Totalizer block/25 ms

### Additional blocks

1 enhanced Resource block,

1 custom Pressure with calibration transducer block

1 custom Advanced Diagnostics transducer block including Plugged Input Line Detection

1 custom Local Display transducer block

### Number of link objects

35

### Number of VCRs

35

## Output interface

FOUNDATION fieldbus digital communication protocol to standard H1, compliant to specification V. 1.7.

### Transmitter failure mode

The output signal is “frozen” to the last valid value on gross transmitter failure condition, detected by self-diagnostics which also indicate a BAD conditions. If electronic failure or short circuit occur the transmitter consumption is electronically limited at a defined value (20 mA approx), for safety of the network.

# Model 266DRH Differential

# Model 266HRH Gauge

# Model 266NRH Absolute

## PROFIBUS® PA output

### Device type

Pressure transmitter compliant to Profiles 3.0.1  
Identification number: 3450<sub>hex</sub>

### Power supply

The transmitter operates from 9 to 32 V DC , polarity independent, with or without surge protector.  
For Ex ia approval power supply must not exceed 17.5 V DC.  
Intrinsic safety installation according to FISCO model.

### Current consumption

operating (quiescent): 15 mA  
fault current limiting: 20 mA max.

### Output signal

Physical layer in compliance to IEC 1158–2/EN 61158–2 with transmission to Manchester II modulation, at 31.25 kbit/s.

### Output interface

PROFIBUS PA communication according to Profibus DP50170 Part 2/DIN 19245 part 1–3.

### Output update time

25 ms

### Data blocks

3 analog input, 1 physical.

### Additional blocks

- 1 Pressure with calibration transducer block
- 1 Advanced Diagnostics transducer block including Plugged Input Line Detection
- 1 Local Display transducer block

### Transmitter failure mode

On gross transmitter failure condition, detected by self-diagnostics, the output signal can be driven to defined conditions, selectable by the user as safe, last valid or calculated value.

If electronic failure or short circuit occur the transmitter consumption is electronically limited at a defined value (20 mA approx), for safety of the network.

## Performance specifications

Stated at reference condition to IEC 60770 ambient temperature of 20 °C (68 °F), relative humidity of 65 %, atmospheric pressure of 1013 hPa (1013 mbar), mounting position with vertical diaphragm and zero based range for transmitter with isolating diaphragms in AISI 316 L ss or Hastelloy and silicone oil fill and HART digital trim values equal to 4 mA and to 20 mA span end points, in linear mode. Unless otherwise specified, errors are quoted as % of span. Some performance referring to the Upper Range Limit are affected by the actual turndown (TD) as ratio between Upper Range Limit (URL) and calibrated span.

IT IS RECOMMENDED TO SELECT THE TRANSMITTER SENSOR CODE PROVIDING THE TURNDOWN VALUE AS LOWEST AS POSSIBLE TO OPTIMIZE PERFORMANCE CHARACTERISTICS.

### Accuracy rating

% of calibrated span, including combined effects of terminal based linearity, hysteresis and repeatability.

For fieldbus versions SPAN refer to analog input function block outscale range

Model	Sensor	for TD	
266DRH with seal(s) mnemonic P3, F3, E3, S3, F2	F	from 1:1 to 10:1	± 0.06 %
	F	from 10:1 to 60:1	± (0.006 x TD) %
	H to S	from 1:1 to 10:1	± 0.075 %
	H to S	from 10:1 to 60:1	± (0.0075 x TD) %
	E and B	from 1:1 to 5:1	± 0.10 %
266DRH high static with seal(s) mnemonic P3, F3, E3, S3, F2	E and B	from 5:1 to 20:1	± (0.02 x TD) %
	F to Q	from 1:1 to 10:1	± 0.075 %
266DRH with seal(s) mnemonic different from above	F to Q	from 10:1 to 60:1	± (0.0075 x TD) %
	F to S	from 1:1 to 10:1	± 0.10 %
	F to S	from 10:1 to 60:1	± (0.01 x TD) %
	E and B	from 1:1 to 5:1	± 0.15 %
266DRH high static with seal(s) mnemonic different from above	E and B	from 5:1 to 20:1	± (0.03 x TD) %
	F to Q	from 1:1 to 10:1	± 0.10 %
266DRH high static with seal(s) mnemonic different from above	F to Q	from 10:1 to 60:1	± (0.01 x TD) %



Model	Sensor	for TD	
266HRH with seal mnemonic P3, F3, E3, S3, F2, K1.5	M and P	from 1:1 to 10:1	± 0.06 %
	M and P	from 10:1 to 60:1	± (0.006 x TD) %
	F, H, Q,	from 1:1 to 10:1	± 0.075 %
	S	from 10:1 to 60:1	± (0.0075 x TD) %
	W	from 1:1 to 5:1	± 0.075 %
		from 5:1 to 50:1	± (0.015 x TD) %
266HRH with seal mnemonic Y1	Z	from 1:1 to 5:1	± 0.15 %
		from 5:1 to 10:1	± (0.03 x TD) %
	H and M	from 1:1 to 5:1	± 0.15 %
	H and M	from 5:1 to 30:1	± (0.03 x TD) %
266HRH with seal mnemonic M1	P, Q	from 1:1 to 5:1	± 0.075 %
	P, Q	from 5:1 to 30:1	± (0.015 x TD) %
	H and M	from 1:1 to 5:1	± 0.15 %
	H and M	from 5:1 to 30:1	± (0.03 x TD) %
266HRH with seal mnemonic M1.5, M1.5B	P, Q, S	from 1:1 to 5:1	± 0.075 %
	P, Q, S	from 5:1 to 30:1	± (0.015 x TD) %
	F, H, M,	from 1:1 to 5:1	± 0.075 %
266HRH with seal mnemonic M1.5A	P, Q, S	from 5:1 to 30:1	± (0.015 x TD) %
	F, H, M,	from 1:1 to 10:1	± 0.10 %
	P, Q, S	from 10:1 to 60:1	± (0.01 x TD) %
266HRH with seal different from above	W	from 1:1 to 5:1	± 0.10 %
		from 5:1 to 50:1	± (0.02 x TD) %
	Z	from 1:1 to 5:1	± 0.20 %
		from 5:1 to 10:1	± (0.04 x TD) %
266NRH with seal mnmo- nic P3, F3, E3, S3, F2, K1.5	F to S	from 1:1 to 10:1	± 0.10 %
	F to S	from 10:1 to 60:1	± (0.01 x TD) %
266NRH with seal mnemonic M1	H and M	from 1:1 to 5:1	± 0.20 %
	H and M	from 5:1 to 30:1	± (0.04 x TD) %
	P, Q, S	from 1:1 to 5:1	± 0.10 %
	P, Q, S	from 5:1 to 30:1	± (0.02 x TD) %
266NRH with seal mnemonic M1.5, M1.5B	F, H, M,	from 1:1 to 5:1	± 0.10 %
	P, Q	from 5:1 to 30:1	± (0.02 x TD) %
266NRH with seal mnemonic M1.5A	F, H, M,	from 1:1 to 5:1	± 0.10 %
	P, Q, S	from 5:1 to 30:1	± (0.02 x TD) %
266NRH with seal different from above	F to S	from 1:1 to 10:1	± 0.15 %
	F to S	from 10:1 to 60:1	± (0.015 x TD) %

### Ambient temperature

Transmitter effect per 20K change between the limits of -40 °C to +85 °C (per 36 °F change between the limits of -40 to +185 °F):

Model	Sensor	for TD up to	
266DRH	E to S	10 : 1	± (0.04 % URL + 0.065 % span)
	B	10 : 1	± (0.06 % URL + 0.10 % span)
266HRH	F to W	10 : 1	± (0.04 % URL + 0.065 % span)
	Z	10 : 1	± (0.06 % URL + 0.10 % span)
266NRH	F to S	10 : 1	± (0.08 % URL + 0.13 % span)

REFER TO S26 SEALS ERRORS IN NEXT PAGES FOR TEMPERATURE ADDITIONAL EFFECTS OF REMOTE/DIRECT MOUNT SEAL(S)

### Static pressure (for 266DRH)

(zero errors can be calibrated out at line pressure)

per 2 MPa, 20 bar or 290 psi for all sensors except B with remote seal(s)

— zero error: ±0.25% of URL

— span error: ±0.25% of reading

with direct mount seal only

— zero error: ±0.15% of URL

— span error: ±0.15% of reading

with direct mount plus remote seal

— zero error: ±0.20% of URL

— span error: ±0.20% of reading

per 2 MPa, 20 bar or 290 psi for sensor B only

with remote seal(s) or with direct mount plus remote seal

— zero error: ±0.30% of URL

— span error: ±0.30% of reading

Model 266DRH with direct mount seal only

— zero error: ±0.25% of URL

— span error: ±0.25% of reading

### Supply voltage

Within voltage/load specified limits the total effect is less than 0.005 % of URL per volt.

### Load

Within load/voltage specified limits the total effect is negligible.

### Electromagnetic field

Meets all the requirements of EN 61326 for surge immunity level (of NAMUR NE 21 on request).

### Common mode interference

No effect from 100Vrms @ 50Hz, or 50 V DC

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

### Seals temperature effects

The following table shows temperature effect per 20 K (36 °F) change, detailed separately for

- the seal (one element), as process temperature error
- the capillary per meter
- the system (transmitter sensor when combined with a seal of specific size/type, either direct mount or remote) referred to silicone oil (PMX 200) filling and AISI 316 L ss diaphragm materials.

For filling different from silicone oil (PMX 200) the errors can be multiplied by ratio between the thermal expansion coefficients of the selected filling divided by the one of PMX 200, listed in the fill fluid characteristics table.

THE ERRORS IN TABLE CAN BE CONSIDERED DIVIDED BY 4 FOR TRANSMITTERS USING SAME REMOTE SEAL ON THE TWO SIDES.

S26RA, S26RE, S26RJ rotating flange seal size - Mnemonic	Sensor URL	Seal error (process)	Direct mount system error (ambient)	Remote system error (ambient)	1 metre capillary error (ambient)
2 in. / DN 50 / A50 - P2	40 kPa, 160 inH2O	0.23 kPa, 0.92 inH2O	0.16 kPa, 0.64 inH2O	0.14 kPa, 0.56 inH2O	0.11 kPa, 0.44 inH2O
2 in. / DN 50 / A50 - P2	≥160 kPa, 642 inH2O	0.23 kPa, 0.92 inH2O	0.16 kPa, 0.64 inH2O	0.14 kPa, 0.56 inH2O	0.07 kPa, 0.28 inH2O
2 in. / DN 50 - F2	≥ 4 kPa, 16 inH2O	0.05 kPa, 0.2 inH2O	0.04 kPa, 0.16 inH2O	0.04 kPa, 0.16 inH2O	0.03 kPa, 0.12 inH2O
2 in. / DN 50 - E2	40 kPa, 160 inH2O	0.25 kPa, 1 inH2O	0.21 kPa, 0.84 inH2O	0.20 kPa, 0.80 inH2O	0.15 kPa, 0.60 inH2O
2 in. / DN 50 - E2	≥160 kPa, 642 inH2O	0.25 kPa, 1 inH2O	0.21 kPa, 0.84 inH2O	0.20 kPa, 0.80 inH2O	0.10 kPa, 0.40 inH2O
3 / 4 in. / DN 80 / 100 A80 / 100 - P3	4 - 16 kPa, 16 - 64 inH2O	0.08 kPa, 0.32 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O
3 / 4 in. / DN 80 / 100 A80 / 100 - P3	≥ 40 kPa, 160 inH2O	0.08 kPa, 0.32 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O	0.03 kPa, 0.12 inH2O
3 / 4 in. / DN 80 / 100 - F3	≥ 4 kPa, 16 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O	0.01 kPa, 0.04 inH2O
3 in. / DN 80 - E3	≥ 4 kPa, 16 inH2O	0.14 kPa, 0.56 inH2O	0.05 kPa, 0.20 inH2O	0.05 kPa, 0.20 inH2O	0.04 kPa, 0.16 inH2O

S26RR flanged RJ seal size - Mnemonic	Sensor URL	Seal error (process)	Direct mount system error (ambient)	Remote mount error (ambient)	1 metre capillary error (ambient)
1 1/2 in. - P1.5	≥ 160 kPa, 642 inH2O	0.74 kPa, 3 inH2O	0.67 kPa, 2.68 inH2O	0.62 kPa, 2.48 inH2O	0.31 kPa, 1.24 inH2O
2 in. - P2	40 kPa, 160 inH2O	0.23 kPa, 0.92 inH2O	0.16 kPa, 0.64 inH2O	0.14 kPa, 0.56 inH2O	0.11 kPa, 0.44 inH2O
2 in. - P2	≥160 kPa, 642 inH2O	0.23 kPa, 0.92 inH2O	0.16 kPa, 0.64 inH2O	0.14 kPa, 0.56 inH2O	0.07 kPa, 0.28 inH2O
3 in. - P3	4 - 16 kPa, 16 - 64 inH2O	0.08 kPa, 0.32 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O
3 in. - P3	≥ 40 kPa, 160 inH2O	0.08 kPa, 0.32 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O	0.03 kPa, 0.12 inH2O

S26RH flanged ISO seal size - Mnemonic	Sensor URL	Seal error (process)	Direct mount system error (ambient)	Remote mount error (ambient)	1 metre capillary error (ambient)
1 13/16 in. - H1.5	≥ 70000 kPa, 10150 psi	0.74 kPa, 3 inH2O	0.67 kPa, 2.68 inH2O	0.62 kPa, 2.48 inH2O	0.31 kPa, 1.24 inH2O
2 1/16 in. - P1.5	≥ 70000 kPa, 10150 psi	0.64 kPa, 2.56 inH2O	1.25 kPa, 5.0 inH2O	1.14 kPa, 0.08 inH2O	0.38 kPa, 1.52 inH2O

<b>S26FA, S26FE fixed flange flush seal size - Mnemonic</b>	<b>Sensor URL</b>	<b>Seal error (process)</b>	<b>Direct mount system error (ambient)</b>	<b>Remote system error (ambient)</b>	<b>1 metre capillary error (ambient)</b>
2 in. / DN 50 - P2	40 kPa, 160 inH2O	0.23 kPa, 0.92 inH2O	0.16 kPa, 0.64 inH2O	0.14 kPa, 0.56 inH2O	0.11 kPa, 0.44 inH2O
2 in. / DN 50 - P2	≥160 kPa, 642 inH2O	0.23 kPa, 0.92 inH2O	0.16 kPa, 0.64 inH2O	0.14 kPa, 0.56 inH2O	0.07 kPa, 0.28 inH2O
2 in. / DN 50 - F2	≥ 4 kPa, 16 inH2O	0.05 kPa, 0.2 inH2O	0.04 kPa, 0.16 inH2O	0.04 kPa, 0.16 inH2O	0.03 kPa, 0.12 inH2O
3 / 4 in. / DN 80 / 100 - P3	4 - 16 kPa, 16 - 64 inH2O	0.08 kPa, 0.32 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O
3 / 4 in. / DN 80 / 100 - P3	≥ 40 kPa, 160 inH2O	0.08 kPa, 0.32 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O	0.03 kPa, 0.12 inH2O
3 / 4 in. / DN 80 / 100 - F3	≥ 4 kPa, 16 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O	0.01 kPa, 0.04 inH2O

<b>S26MA, S26ME off-line flange seal size - Mnemonic</b>	<b>Sensor URL</b>	<b>Seal error (process)</b>	<b>Direct mount system error (ambient)</b>	<b>Remote system error (ambient)</b>	<b>1 metre capillary error (ambient)</b>
2 1/2 in. - T2.5	≥ 4 kPa, 16 inH2O	0.26 kPa, 1.04 inH2O	0.11 kPa, 0.44 inH2O	0.1 kPa, 0.4 inH2O	0.08 kPa, 0.32 inH2O

<b>S26TT off-line threaded seal size - Mnemonic</b>	<b>Sensor URL</b>	<b>Seal error (process)</b>	<b>Direct mount system error (ambient)</b>	<b>Remote system error (ambient)</b>	<b>1 metre capillary error (ambient)</b>
2 1/2 in. - T2.5	≥ 4 kPa, 16 inH2O	0.26 kPa, 1.04 inH2O	0.11 kPa, 0.44 inH2O	0.1 kPa, 0.4 inH2O	0.08 kPa, 0.32 inH2O

<b>S26SS sanitary and food seal size - Mnemonic</b>	<b>Sensor URL</b>	<b>Seal error (process)</b>	<b>Direct mount system error (ambient)</b>	<b>Remote system error (ambient)</b>	<b>1 metre capillary error (ambient)</b>
2 in. / F50 - S2	40 kPa, 160 inH2O	0.7 kPa, 2.8 inH2O	0.93 kPa, 3.72 inH2O	0.87 kPa, 3.48 inH2O	0.68 kPa, 2.72 inH2O
2 in. / F50 - S2	≥160 kPa, 642 inH2O	0.7 kPa, 2.8 inH2O	0.93 kPa, 3.72 inH2O	0.87 kPa, 3.48 inH2O	0.44 kPa, 1.76 inH2O
2 in. - S2.5	40 kPa, 160 inH2O	0.16 kPa, 0.64 inH2O	0.19 kPa, 0.76 inH2O	0.18 kPa, 0.72 inH2O	0.14 kPa, 0.56 inH2O
2 in. - S2.5	≥160 kPa, 642 inH2O	0.16 kPa, 0.64 inH2O	0.19 kPa, 0.76 inH2O	0.18 kPa, 0.72 inH2O	0.09 kPa, 0.36 inH2O
3 / 4 in. / F80 - S3	4 - 16 kPa, 16 - 64 inH2O	0.06 kPa, 0.24 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O	0.01 kPa, 0.04 inH2O
3 / 4 in. / F80 - S3	≥ 40 kPa, 160 inH2O	0.06 kPa, 0.24 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O	0.03 kPa, 0.12 inH2O
3 / 4 in. - S3.5	4 - 16 kPa, 16 - 64 inH2O	0.04 kPa, 0.16 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O	0.01 kPa, 0.04 inH2O
3 / 4 in. - S3.5	≥ 40 kPa, 160 inH2O	0.04 kPa, 0.16 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O	0.03 kPa, 0.12 inH2O
1 1/2 in. - K1.5	≥ 40 kPa, 260 inH2O	0.2 kPa, 0.8 inH2O	0.5 kPa, 2 inH2O	NA	NA

<b>S26VN saddle &amp; socket seal size - Mnemonic</b>	<b>Sensor URL</b>	<b>Seal error (process)</b>	<b>Direct mount system error (ambient)</b>	<b>Remote mount error (ambient)</b>	<b>1 metre capillary error (ambient)</b>
1 1/2 in. - P1.5	≥ 160 kPa, 642 inH2O	0.74 kPa, 3 inH2O	0.67 kPa, 2.68 inH2O	0.62 kPa, 2.48 inH2O	0.31 kPa, 1.24 inH2O

<b>S26WA, S26WE wafer seal size - Mnemonic</b>	<b>Sensor URL</b>	<b>Seal error (process)</b>	<b>Remote mount error (ambient)</b>	<b>1 metre capillary error (ambient)</b>
1 1/2 in. / DN 40 - P1.5	≥ 160 kPa, 642 inH2O	0.74 kPa, 3 inH2O	0.62 kPa, 2.48 inH2O	0.31 kPa, 1.24 inH2O
1 1/2 in. / DN 40 - F1.5	≥ 160 kPa, 642 inH2O	0.15 kPa, 0.6 inH2O	0.15 kPa, 0.6 inH2O	0.08 kPa, 0.32 inH2O
2 in. / DN 50 - P2	40 kPa, 160 inH2O	0.23 kPa, 0.92 inH2O	0.14 kPa, 0.56 inH2O	0.11 kPa, 0.44 inH2O
2 in. / DN 50 - P2	≥160 kPa, 642 inH2O	0.23 kPa, 0.92 inH2O	0.14 kPa, 0.56 inH2O	0.07 kPa, 0.28 inH2O
2 in. / DN 50 - F2	≥ 4 kPa, 16 inH2O	0.05 kPa, 0.2 inH2O	0.04 kPa, 0.16 inH2O	0.03 kPa, 0.12 inH2O
3 in. / DN 80 - P3	4 - 16 kPa, 16 - 64 inH2O	0.08 kPa, 0.32 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O
3 in. / DN 80 - P3	≥ 40 kPa, 160 inH2O	0.08 kPa, 0.32 inH2O	0.02 kPa, 0.08 inH2O	0.03 kPa, 0.12 inH2O
3 in. / DN 80 - F3	≥ 4 kPa, 16 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O	0.01 kPa, 0.04 inH2O

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

<b>S26CN Chemical Tee seal size - Mnemonic</b>	<b>Sensor URL</b>	<b>Seal error (process)</b>	<b>Remote system error (ambient)</b>	<b>1 metre capillary error (ambient)</b>
3 in. - P3	4 - 16 kPa, 16 - 64 inH2O	0.08 kPa, 0.32 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O
3 in. - P3	≥ 40 kPa, 160 inH2O	0.08 kPa, 0.32 inH2O	0.02 kPa, 0.08 inH2O	0.03 kPa, 0.12 inH2O

<b>S26BN Button type seal size - Mnemonic</b>	<b>Sensor URL</b>	<b>Seal error (process)</b>	<b>Remote system error (ambient)</b>	<b>1 metre capillary error (ambient)</b>
1 in. - B1	≥ 8 MPa, 1160 psi	1.3 kPa, 5.2 inH2O	6.5 kPa, 26 inH2O	1.9 kPa, 7.6 inH2O

<b>S26UN Union connection seal size - Mnemonic</b>	<b>Sensor URL</b>	<b>Seal error (process)</b>	<b>Remote system error (ambient)</b>	<b>1 metre capillary error (ambient)</b>
1 1/2 in. - Z1.5	≥ 160 kPa, 642 inH2O	0.29 kPa, 1.16 inH2O	0.62 kPa, 2.48 inH2O	0.31 kPa, 1.24 inH2O

<b>S26PN urea service seal size - Mnemonic</b>	<b>Sensor URL</b>	<b>Seal error (process)</b>	<b>Remote system error (ambient)</b>	<b>1 metre capillary error (ambient)</b>
1 1/2 in. - U1.5 (2 in. flange)	≥ 160 kPa, 642 inH2O	0.86 kPa, 3.44 inH2O	1.1 kPa, 4.4 inH2O	0.54 kPa, 2.16 inH2O
2 1/2 in. - U2.5 (3 in. flange)	≥ 40 kPa, 160 inH2O	0.18 kPa, 0.72 inH2O	0.06 kPa, 0.24 inH2O	0.11 kPa, 0.44 inH2O

<b>S26JN in-line seal size - Mnemonic</b>	<b>Sensor URL</b>	<b>Seal error (process)</b>	<b>Direct mount error (ambient)</b>
1 in. - J1	≥ 600 kPa, 87 psi	2.2 kPa, 8.8 inH2O	0.94 kPa, 3.76 inH2O
1 1/2 in. - J1.5	≥ 600 kPa, 87 psi	1.4 kPa, 5.6 inH2O	0.36 kPa, 1.44 inH2O
2 in. - J2	≥ 600 kPa, 87 psi	4.6 kPa, 18.4 inH2O	0.94 kPa, 3.76 inH2O
4 in. - J3	≥ 600 kPa, 87 psi	3.0 kPa, 12 inH2O	0.42 kPa, 1.68 inH2O

<b>S26KN paper seal size - Mnemonic</b>	<b>Sensor URL</b>	<b>Seal error (process)</b>	<b>Direct mount error (ambient)</b>
1 in. - Y1	≥ 160 kPa, 642 inH2O	1.2 kPa, 4.8 inH2O	0.64 kPa, 2.56 inH2O
1 in. - M1	≥ 160 kPa, 642 inH2O	0.6 kPa, 2.4 inH2O	0.64 kPa, 2.56 inH2O
1 1/2 in. M1.5 - M1.5A - M1.5B	≥ 40 kPa, 160 inH2O	0.2 kPa, 0.8 inH2O	0.48 kPa, 1.92 inH2O

## Physical Specification

(Refer to ordering information pages for variant availability related to specific model or versions code)

### Model 266DRH only - materials of side without seal Process isolating diaphragms (\*)

AISI 316 L ss; Hastelloy® C-276; Monel 400®; Tantalum.  
A remote seal can be selected with required diaphragm material (refer to high pressure side).

### Process flanges, adapters, plugs and drain/vent valves (\*)

AISI 316 L ss <sup>(1)</sup>; Hastelloy® C-276 <sup>(2)</sup>; Monel 400® <sup>(3)</sup>.

### Bolts and nuts

AISI 316 ss bolts Class A4–80 and nuts Class A4-70 per ISO 3506;

AISI 316 ss bolts and nuts Class A4–50 per ISO 3506, in compliance with NACE MR0175 Class II (std. static only).  
Stainless steel per ASTM-A-453 grade 660D, in compliance with NACE MR0175 Class II (high static only).

### Gaskets (\*)

Viton®; PTFE.

### Model 266DRH, 266HRH, 266NRH materials

#### Seal side process diaphragm (remote/direct mount seal) (\*)

AISI 316 L ss; Hastelloy® C-276; Hastelloy® C-2000; Inconel 625; Tantalum; AISI 316 L ss or Hastelloy® C-276 with anti-stick coating; AISI 316 L ss with anti-corrosion coating; AISI 316 L ss gold plated; Superduplex ss (UNS S32750 to ASTM SA479); Diaflex (AISI with anti-abrasion treatment).

### Extension material (\*)

AISI 316 L ss (also for Diaflex and gold plated diaphragms); Hastelloy® C-276; AISI 316 L ss or Hastelloy® C-276 with coating same as diaphragm

### Seal side fill fluid

Silicone oil-PMX 200®; Silicone oil for high temperature; Low viscosity silicone oil-Baysilone® M5; Inert-Galden®; Inert-Halocarbon® 4.2; Silicone Polymer-Syltherm XLT®; Glycerin Water; Vegetable oil-Neobee® M-20; Mineral oil-Esso Marcol 152®.

### Sensor fill fluid

Silicone oil; Inert fill (Halocarbon® 4.2 or Galden®).

### Sensor housing

AISI 316 L ss.

### Electronic housing and covers

Aluminium alloy (copper content ≤ 0.3 %) with baked epoxy finish (colour RAL9002); AISI 316 L ss.

### Covers O-ring

Buna N.

### Mounting bracket (\*\*)

Zinc plated carbon steel with chrome passivation; AISI 316 ss; AISI 316 L ss.

### Local adjustments (zero, span and write protect)

For Standard HART version:

- Internal for zero and span (on communication board)
- External non-intrusive for zero, span and write protect in glass filled polyphenylene oxyde, removable (code R1).

For all other versions:

- External non-intrusive for zero, span and write protect in glass filled polyphenylene oxyde, removable.

### Plates

Transmitter nameplate: AISI 316 ss screwed to the electronics housing.

Certification plate and optional tag/calibration plate : self-adhesive attached to the electronics housing or AISI 316 ss fastened to the electronics housing with rivets or screws.

Optional wired-on customer data plate: AISI 316 ss.

Laser printing on metal or thermal printing on self-adhesive.

For AISI 316 L ss housing it is mandatory to select option I2 or I3 for plates in AISI 316 ss.

(\*)Wetted parts of the transmitter.

(\*\*) U-bolt material: high-strength alloy steel or AISI 316 L ss;  
bolts/nuts material: high-strength alloy steel or AISI 316 ss.

<sup>(1)</sup> Supplied as AISI 316 L or as ASTM A351 Grade CF-3M

<sup>(2)</sup> Supplied as Hastelloy C-276 or as ASTM A494 alloy CW-12MW

<sup>(3)</sup> Supplied as Monel 400 or as ASTM A494 Grade M-35-1

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

### Calibration

Standard: at maximum span, zero based range, ambient temperature and pressure;  
Optional: at specified range and ambient conditions.

### Optional extras

#### Mounting brackets (code Bx)

For vertical and horizontal 60mm. (2in) pipes or wall mounting.

#### Display (code Lx)

4-position (at 90°) user orientable, except "LS".

#### Optional plates (code Ix)

Code I2: AISI 316 ss plate with laser printed tag (up to 31 characters) and calibration details (up to 31 characters: lower and upper range values and engineering unit) fixed onto transmitter housing.

Code I1: AISI 316 ss wired-on plate with laser printed customized data (4 lines of 32 characters with 4 mm/0.16 in. height).

#### Surge protection (code S2)

#### Test Certificates (test, design, calibration, material traceability) (codes Cx and Hx)

#### Tag and manual language (codes Tx and Mx)

#### Process connections 266DRH only - side without seal

on conventional flanges : 1/4 in. – 18 NPT on process axis  
on adapters : 1/2 in. – 14 NPT on process axis  
fixing threads: 7/16 in. – 20 UNF at 41.3mm centre distance

Refer to S26 seal data sheet for process connection variants through remote seal.

#### Gasket seat finish for seals

Smooth (ASME or EN): 0.8 µm (Ra)  
Serrated (ASME): 3.2 to 6.3 µm (Ra)  
Serrated (EN 1092-1 Type B1): 3.2 to 12.5 µm (Ra)  
Serrated (EN 1092-1 Type D and E): according to standard

### Electrical connections

Two 1/2 in. – 14 NPT or M20x1.5 threaded conduit entries, direct on housing. Only M20x1.5 for WirelessHART with one port used for antenna.

One certified stainless steel plug (supplied loose with thread according to housing entries) available as option.

### Terminal block

HART version: three terminals for signal/external meter wiring up to 2.5 mm<sup>2</sup> (14 AWG), also connection points for test and communication purposes.

WirelessHART version: connection points for test and communication purposes; additional fast connection for external harvesting unit.

Fieldbus versions: two terminals for signal wiring (bus connection) up to 2.5 mm<sup>2</sup> (14 AWG)

### Grounding

Internal and external 6 mm<sup>2</sup> (10 AWG) ground termination points are provided.

### Mounting position

Transmitter can be mounted in any position.

Electronics housing may be rotated to any position. A positive stop prevents over travel.

### Mass (without options and seals)

models 266DRH: 4 kg approx (8.8 lb)

models 266HRH, 266NRH: 2 kg approx (4.4 lb)

Add 1.5 kg (3.4 lb) for AISI housing.

Add 650 g (1.5 lb) for packing.

Consider additional weight up to 50 kg (up to 110 lb) for seals.

### Packing

Carton

## Configuration

### Transmitter with HART communication and 4 to 20 mA Standard configuration

Transmitters are factory calibrated to customer's specified range. Calibrated range and tag number are stamped on the tag plate. If a calibration range and tag data are not specified, the transmitter will be supplied with the plate left blank and configured as follows:

Engineering Unit	kPa
4 mA	Zero
20 mA	Upper Range Limit (URL)
Output	Linear
Damping	1 s
Transmitter failure mode	Upscale
Software tag (8 characters max)	Blank
Optional LCD display	PV in kPa; output in mA and in percentage on bargraph

Any or all the above configurable parameters, including Lower range-value and Upper range-value which must be the same unit of measure, can be easily changed using the HART hand-held communicator or by a PC running the configuration software with DTM for 266 models. The transmitter database is customized with specified flange type and material, O-ring and drain/vent materials and meter code option.

### Custom configuration (option N6)

The following data may be specified in addition to the standard configuration parameters:

Descriptor	16 alphanumeric characters
Message	32 alphanumeric characters
Date	Day, month, year

For HART protocol available engineering units of pressure measure are :

Pa, kPa, MPa

inH<sub>2</sub>O@4 °C, mmH<sub>2</sub>O@4 °C, psi

inH<sub>2</sub>O@68 °F, ftH<sub>2</sub>O@68 °F, mmH<sub>2</sub>O@68 °F

inHg, mmHg, Torr

g/cm<sup>2</sup>, kg/cm<sup>2</sup>, atm

mbar, bar

These and others are available for PROFIBUS and FOUNDATION Fieldbus.

### Transmitter with WirelessHART communication Standard configuration

Transmitters are factory calibrated to customer's specified range. Calibrated range and tag number are stamped on the tag plate. If a calibration range and tag data are not specified, the transmitter will be supplied with the plate left blank and configured as follows:

Engineering Unit	kPa
Output scale 0 %	Lower Range Limit (LRL)
Output scale 100 %	Upper Range Limit (URL)
Output	Linear
Update rate	16 s
Software tag (8 characters max)	Blank
Optional LCD display	PV in kPa; output in percentage on bargraph

Any or all the above configurable parameters, including Lower range-value and Upper range-value which must be the same unit of measure, can be easily changed using the HART hand-held communicator or by a PC running the configuration software with DTM for 266 models. The transmitter database is customized with specified flange type and material, O-ring and drain/vent materials and meter code option.

### Custom configuration (option N6)

The following data may be specified in addition to the standard configuration parameters:

Descriptor	16 alphanumeric characters
Message	32 alphanumeric characters
Date	Day, month, year

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

### Transmitter with PROFIBUS PA communication

#### Standard configuration

Transmitters are factory calibrated to customer's specified range. Calibrated range and tag number are stamped on the tag plate. If a calibration range and tag data are not specified, the transmitter will be supplied with the plate left blank and configured as follows:

Measure Profile	Pressure
Engineering Unit	kPa
Output scale 0 %	Lower Range Limit (LRL)
Output scale 100 %	Upper Range Limit (URL)
Output	Linear
Hi-Hi Limit	Upper Range Limit (URL)
Hi Limit	Upper Range Limit (URL)
Low Limit	Lower Range Limit (LRL)
Low-Low Limit	Lower Range Limit (LRL)
Limits hysteresis	0.5 % of output scale
PV filter	0 s
Address (set by local key)	126
Tag	32 alphanumeric characters
Optional LCD display	PV in kPa; output in percentage on bargraph

Any or all the above configurable parameters, including the range values which must be the same unit of measure, can be easily changed by a PC running the configuration software with DTM for 266 models. The transmitter database is customized with specified flange type and material, O-ring and drain/vent materials and meter code option.

#### Custom configuration (option N6)

The following data may be specified in addition to the standard configuration parameters:

Descriptor	32 alphanumeric characters
Message	32 alphanumeric characters
Date	Day, month, year

### Transmitter with FOUNDATION Fieldbus communication

#### Standard configuration

Transmitters are factory calibrated to customer's specified range. Calibrated range and tag number are stamped on the tag plate. If a calibration range and tag data are not specified, the transmitter will be supplied with the plate left blank and the analog input function block FB1 is configured as follows:

Measure Profile	Pressure
Engineering Unit	kPa
Output scale 0 %	Lower Range Limit (LRL)
Output scale 100 %	Upper Range Limit (URL)
Output	Linear
Hi-Hi Limit	Upper Range Limit (URL)
Hi Limit :	Upper Range Limit (URL)
Low Limit	Lower Range Limit (LRL)
Low-Low Limit	Lower Range Limit (LRL)
Limits hysteresis	0.5 % of output scale
PV filter time	0 s
Tag	32 alphanumeric characters
Optional LCD display	PV in kPa; output in percentage on bargraph

The analog input function block FB2 and FB3 are configured respectively for the sensor temperature measured in °C and for the static pressure measured in MPa.

Any or all the above configurable parameters, including the range values, can be changed using any host compliant to FOUNDATION fieldbus. The transmitter database is customized with specified flange type and material, O-ring and drain/vent materials and meter code option.

#### Custom configuration (option N6)


The following data may be specified in addition to the standard configuration parameters:

Descriptor	32 alphanumeric characters
Message	32 alphanumeric characters
Date	Day, month, year




## MOUNTING DIMENSIONS (not for construction unless certified) – dimensions in mm. (in.)

### 266DRH with barrel housing and remote seal(s)

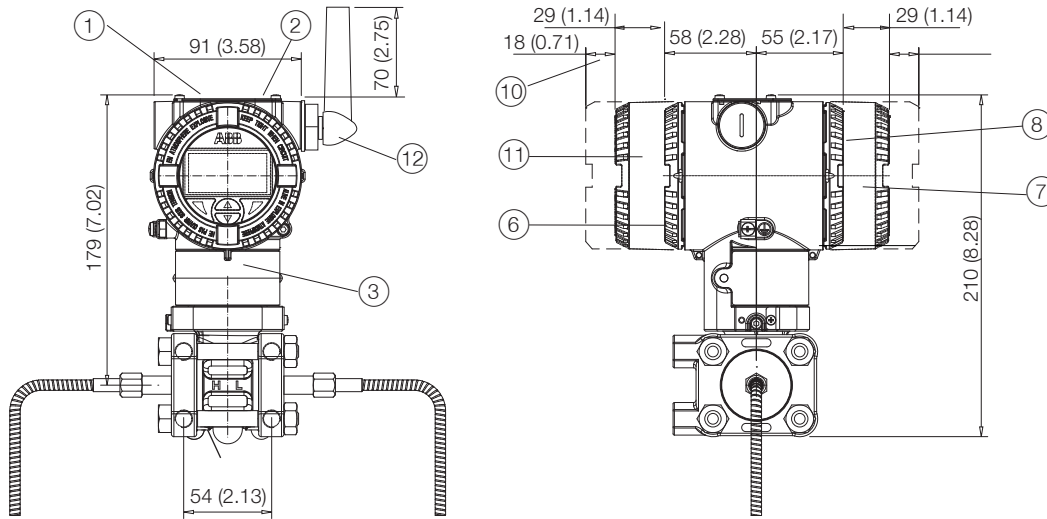


- ① Adjustments | ② Identification plate | ③ Certification plate | ④ Drain/vent valve | ⑤ Process connection | ⑥ Terminal side |  
 ⑦ L1 and L5 integral display housing | ⑧ Electronic side | ⑨ Adapter | ⑩ Space for cover removal | ⑪ Battery housing of WirelessHART version |  
 ⑫ Antenna of WirelessHART version

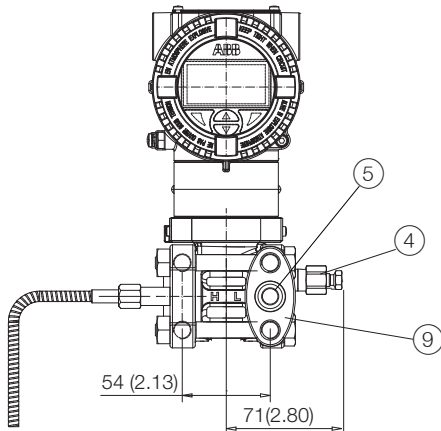



NOTE : For 266DRH using one seal only, the threaded connection (1/4 in. – 18 NPT direct or 1/2 in. – 14 NPT through adapter) of conventional flange, gasket groove and gaskets are in accordance with IEC 61518.  
 Bolting threads for fixing adapter or other devices (i.e. manifold etc.) on process flange is  $\frac{7}{16}$  in. – 20 UNF.  
 Negative side of gauge measurement version 266DRHxP is provided with a removable filter, granting protection to the atmospheric pressure reference.

Model 266DRH Differential  
 Model 266HRH Gauge  
 Model 266NRH Absolute

266DRH with barrel housing and remote seal(s) on bracket for vertical or horizontal 60 mm. (2 in.) pipe

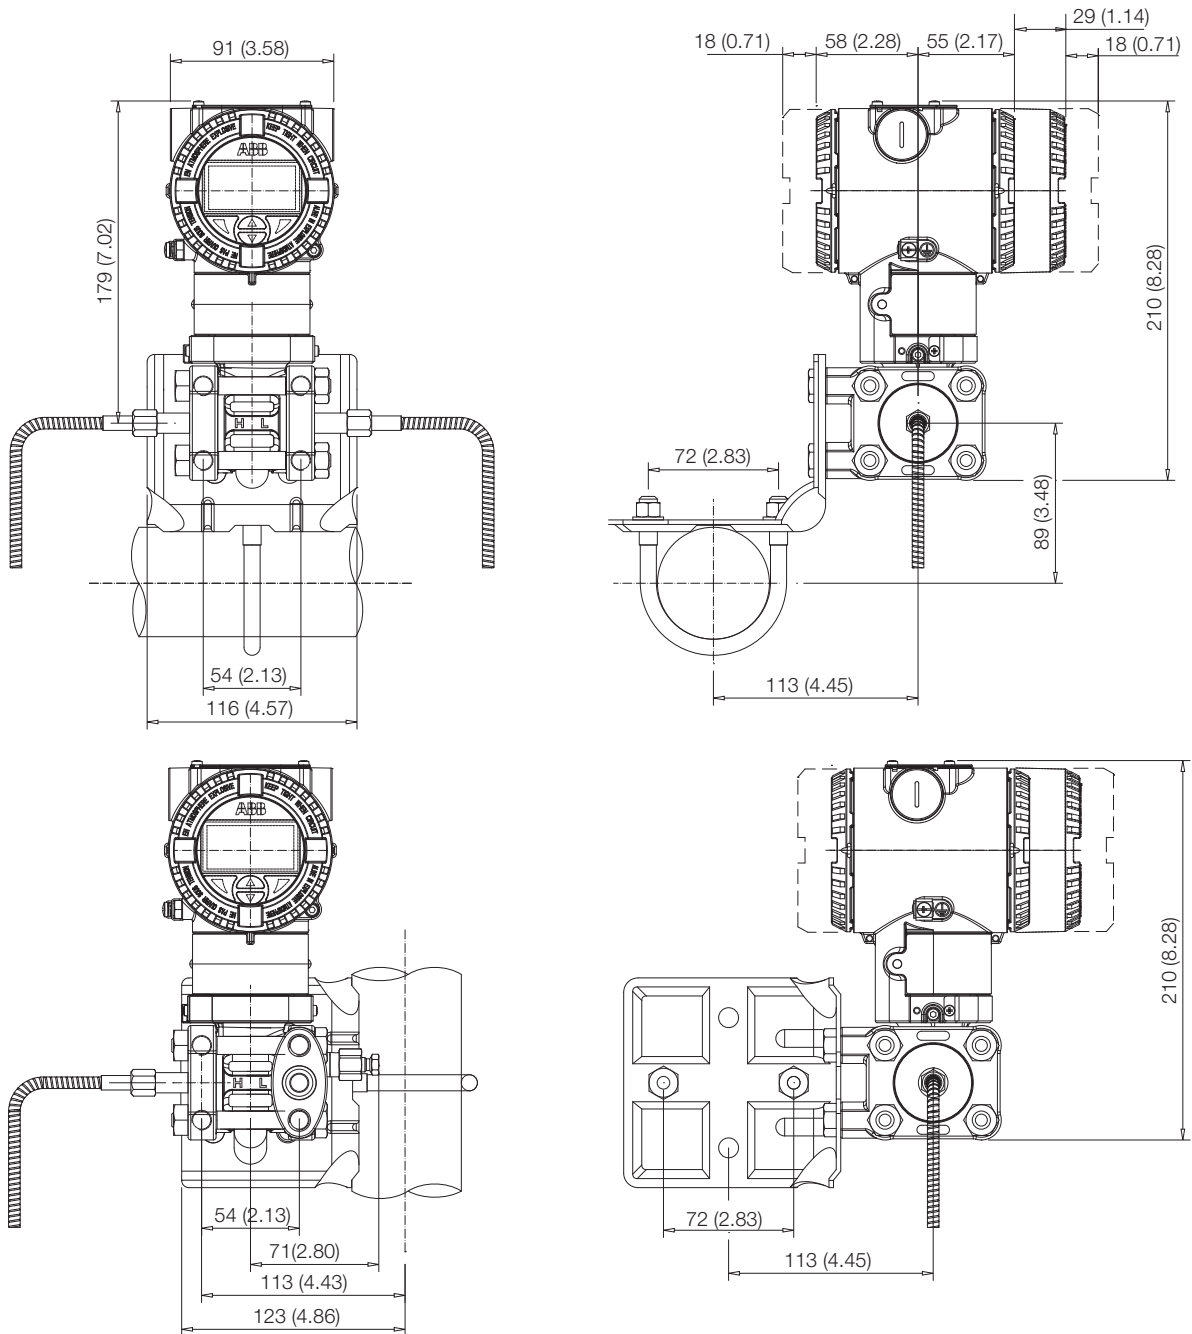


266DRH with DIN housing and remote seal(s) on bracket for vertical or horizontal 60 mm. (2 in.) pipe

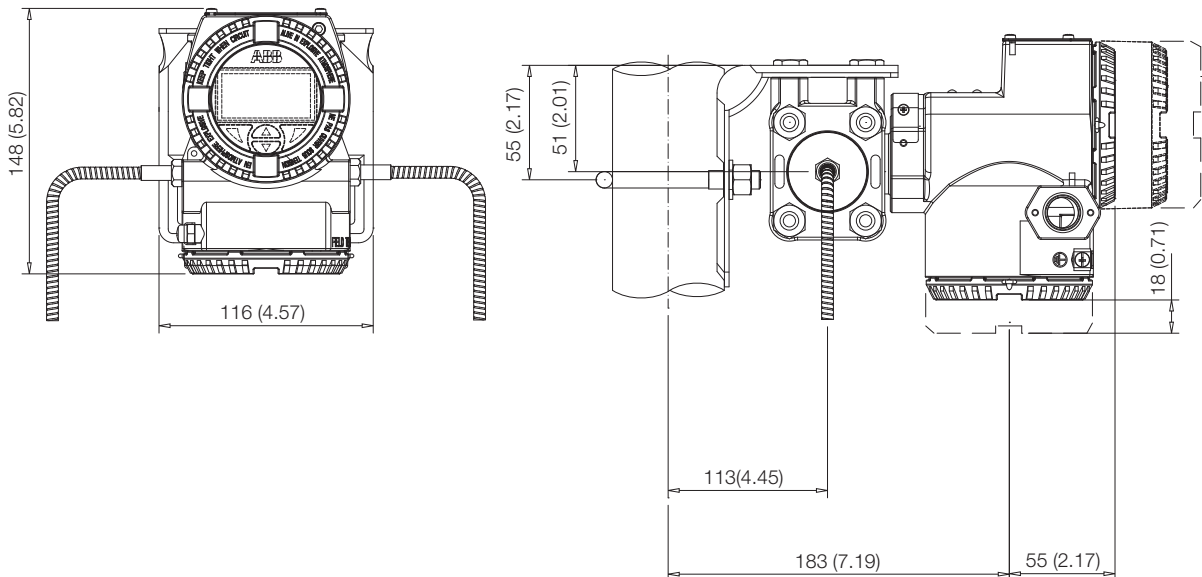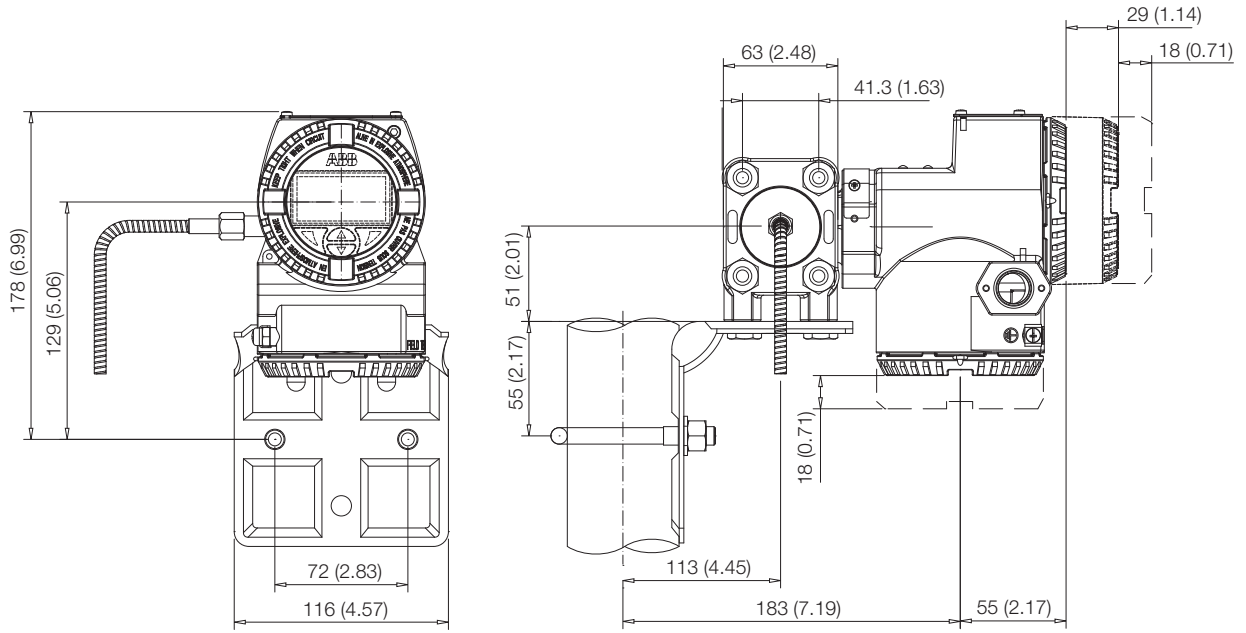


Model 266DRH Differential  
 Model 266HRH Gauge  
 Model 266NRH Absolute


266DRH with barrel housing and remote seal(s) on flat bracket for vertical or horizontal 60 mm. (2 in.) pipe

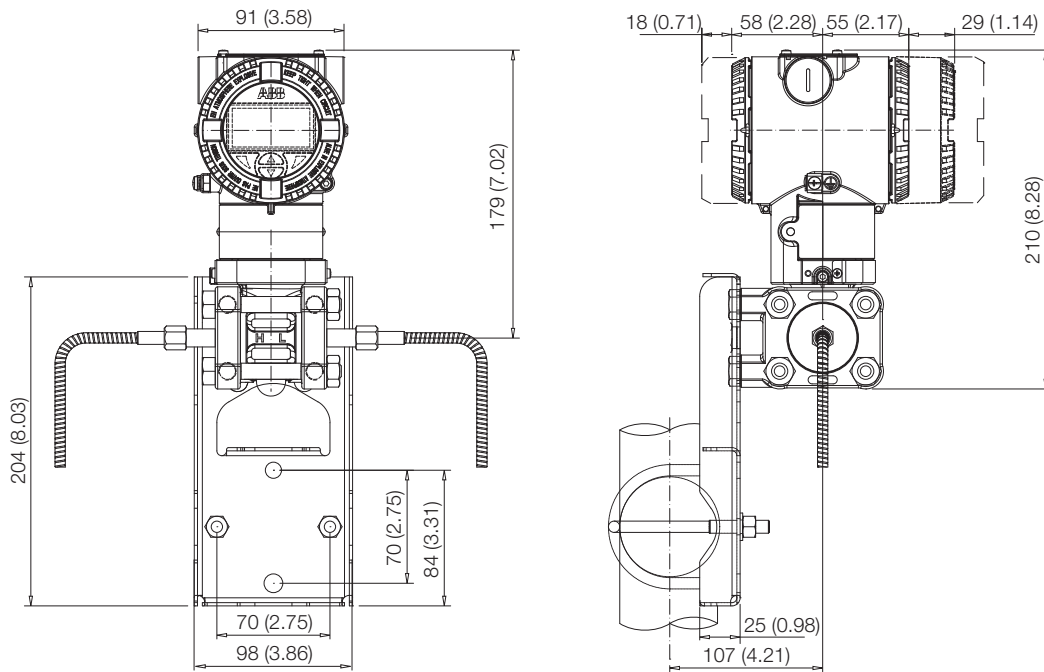


266HRH, 266NRH with barrel housing and remote seal(s) on bracket for vertical or horizontal 60 mm. (2 in.) pipe sensors F, H, M, P, Q, S, W

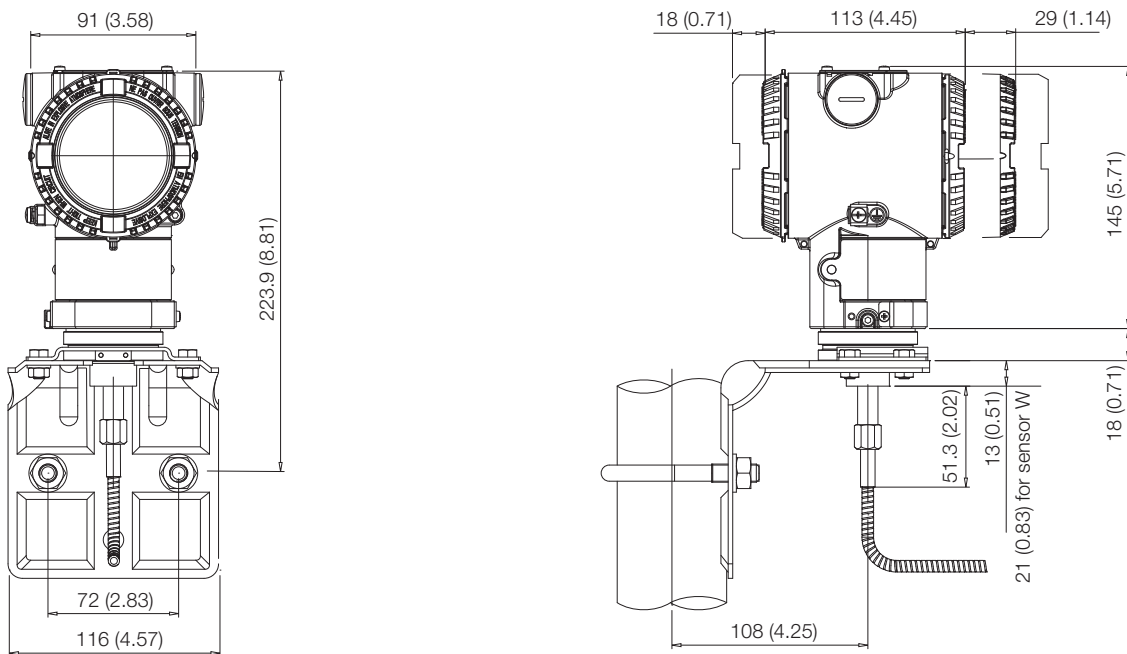

**266HRH, 266NRH with barrel housing and remote seal(s) on bracket for vertical or horizontal 60 mm. (2 in.) pipe sensors Z**

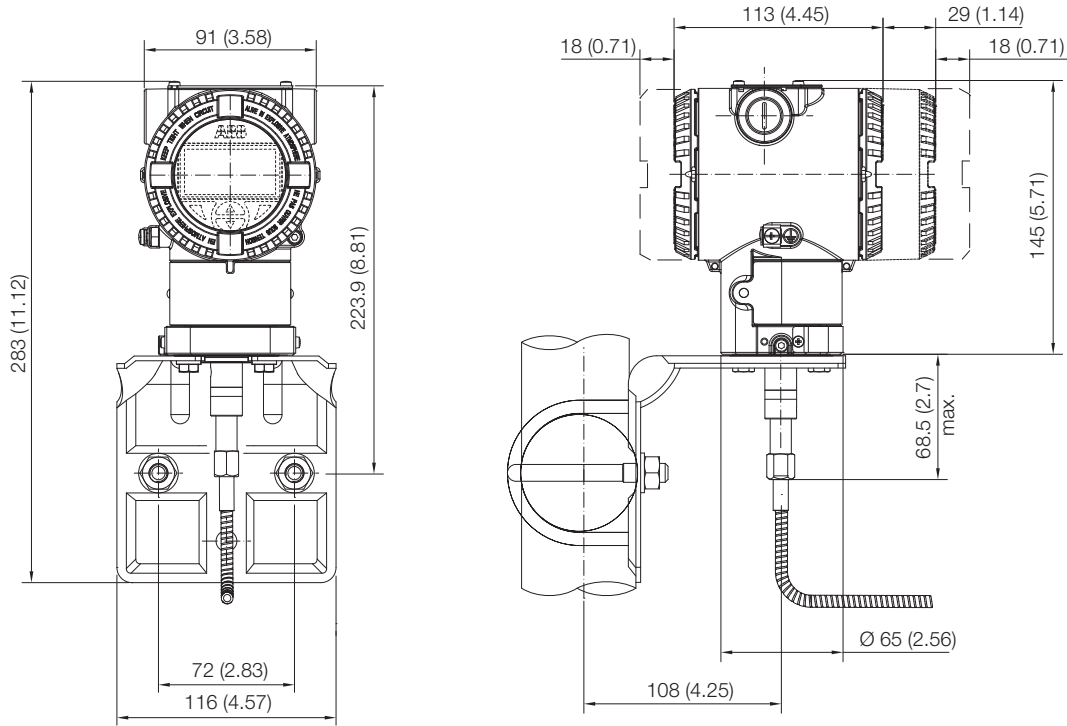


**266HRH, 266NRH with DIN housing and remote seal(s) on bracket for vertical or horizontal 60 mm. (2 in.) pipe sensors F, H, M, P, Q, S, W**

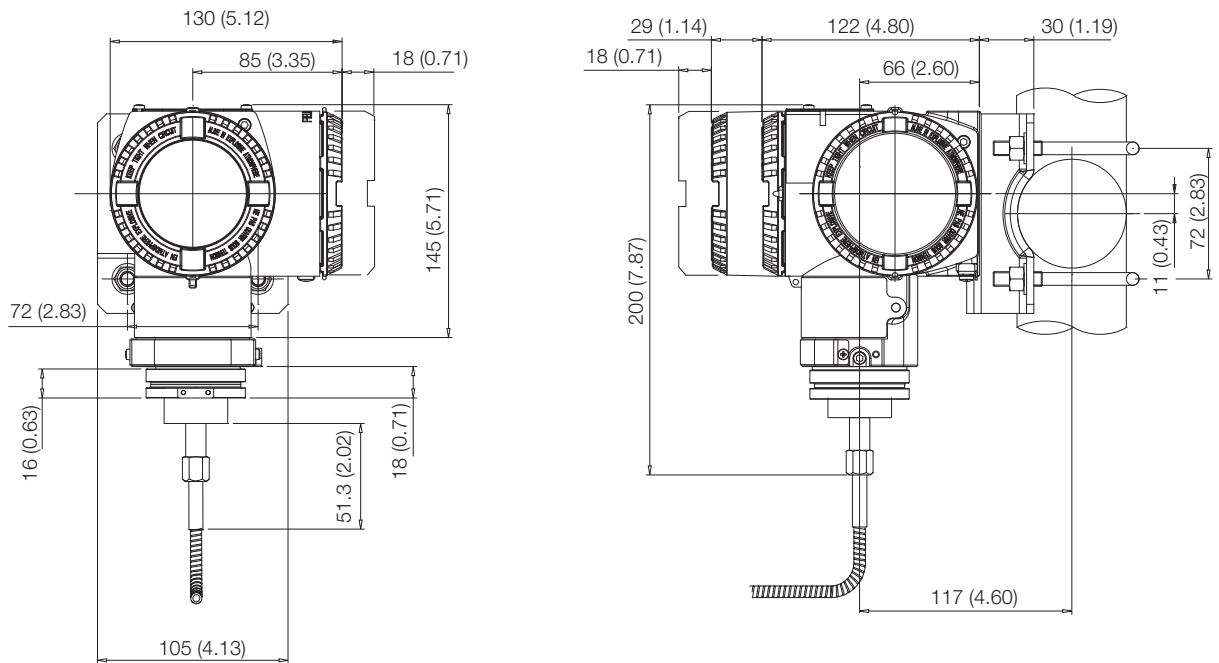


Model 266DRH Differential  
 Model 266HRH Gauge  
 Model 266NRH Absolute


S26RA, S26RE, S26RJ Rotating flange diaphragm seals (flush and extended)

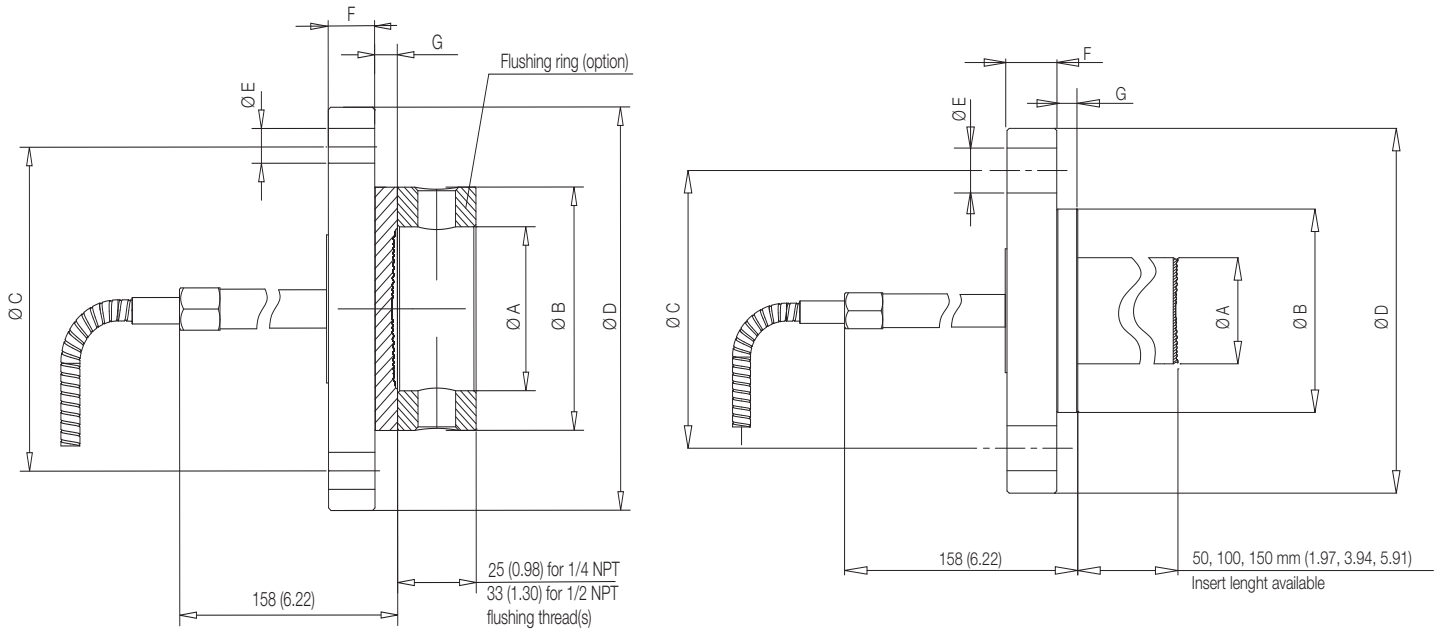


266DRH with barrel housing and direct mount seal S26RA/S26RE/S26RJ rotating flange Raised Face flush diaphragm

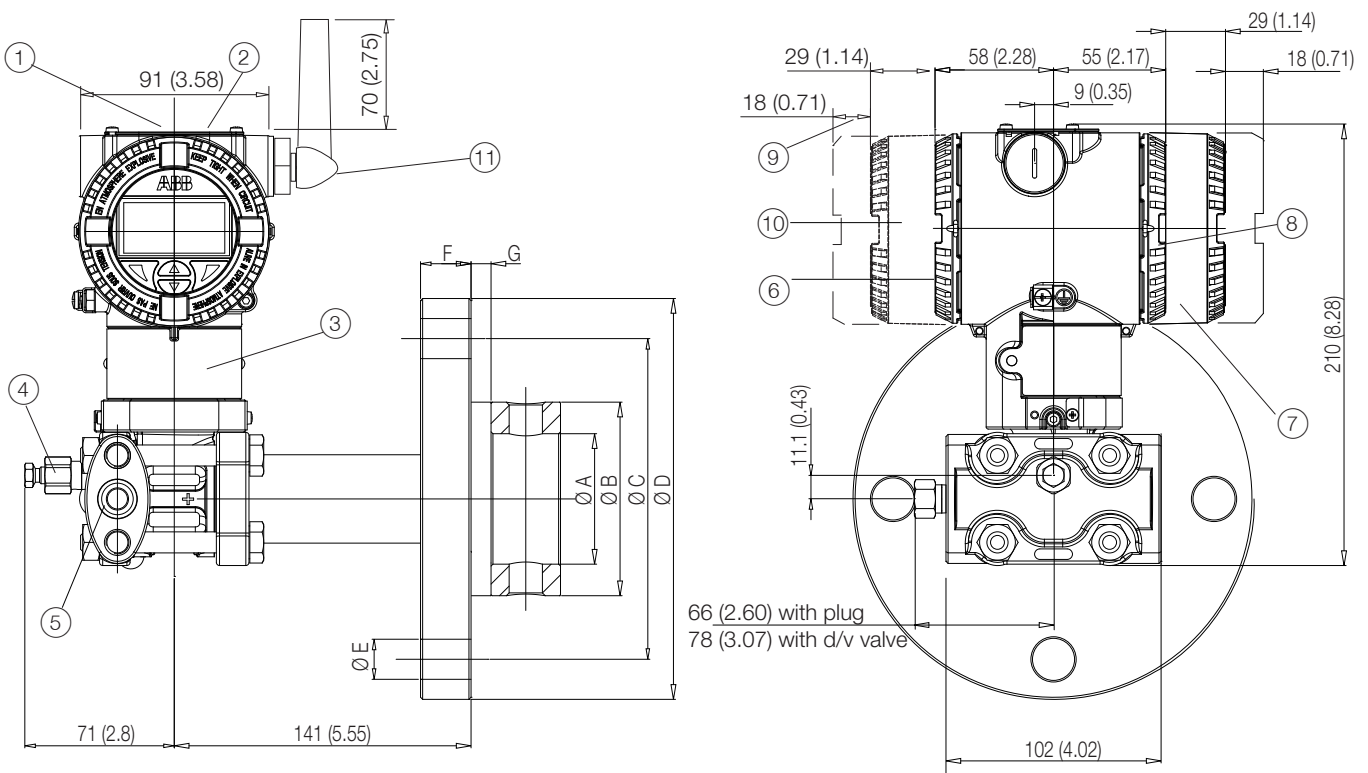

**266DRH with DIN housing and direct mount seal S26RA/S26RE/S26RJ rotating flange Raised Face extended diaphragm**

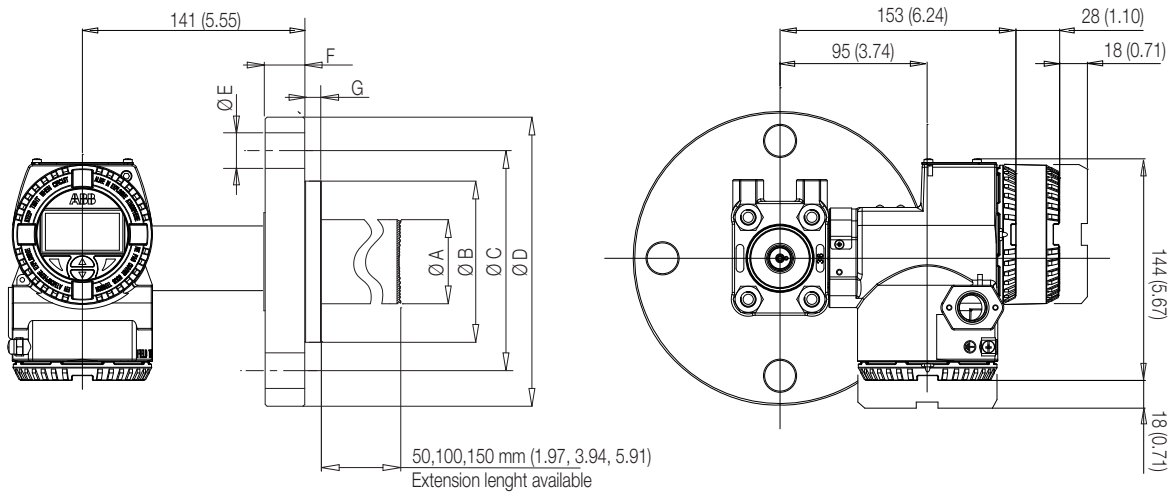

**266HRH/266NRH with barrel housing and direct mount seal S26RA/S26RE/S26RJ flanged Raised Face extended diaphragm**

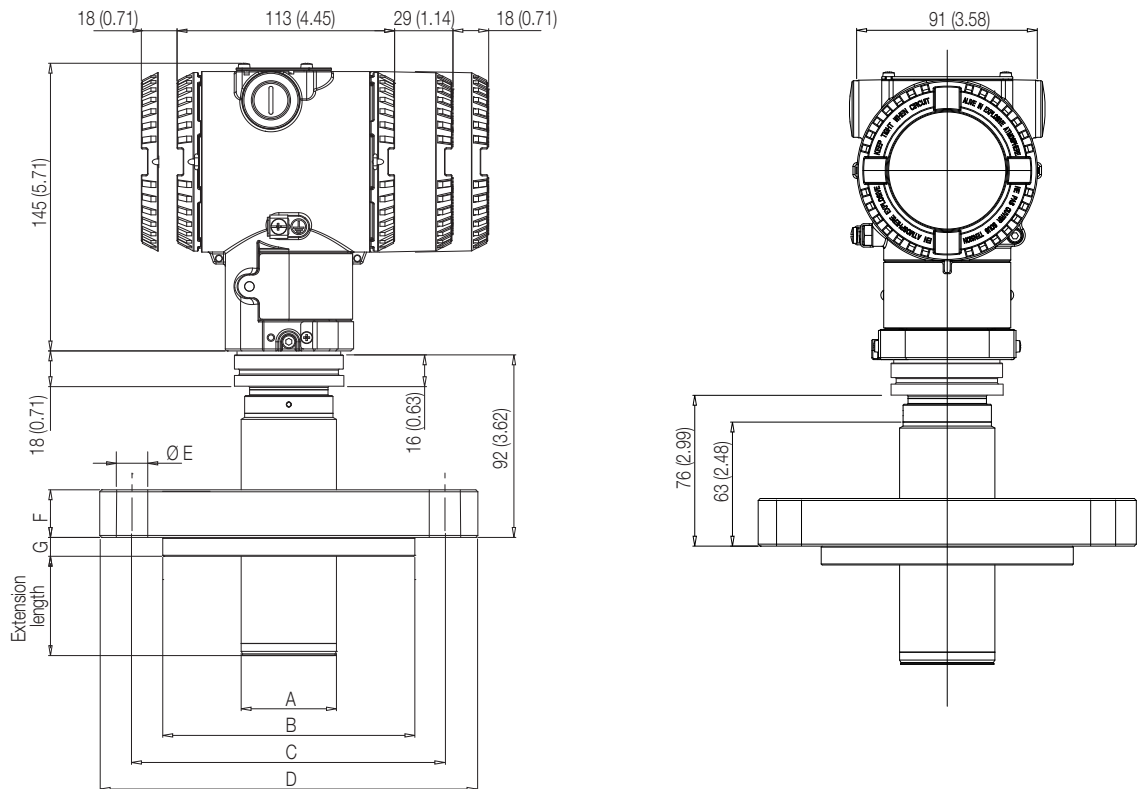

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

Size/Rating	Dimensions mm. (in.) for S26RA										
	A (dia)				B (dia)	C (dia)	D (dia)	E (dia)	F (Note 1)	G	N° of holes
	extended diaphragm	flush diaphragm		flushing ring internal dia							
2 in. ASME CL 150	48 (1.9)	60 (2.36)	58 (2.28)	62 (2.44)	92 (3.62)	120.65 (4.75)	152.4 (6)	19.1 (0.79)	17.5 (0.6)	9.5 (0.37)	4
2 in. ASME CL 300	48 (1.9)	60 (2.36)	58 (2.28)	62 (2.44)	92 (3.62)	127 (5)	165.1 (6.5)	19.1 (0.79)	20.8 (0.8)	9.5 (0.37)	8
2 in. ASME CL 600	NA	60 (2.36)	58 (2.28)	62 (2.44)	92 (3.62)	127 (5)	165.1 (6.5)	19.1 (0.79)	25.4 (1)	9.5 (0.37)	8
2 in. ASME CL 900	NA	60 (2.36)	58 (2.28)	62 (2.44)	92 (3.62)	165 (6.5)	215.9 (8.5)	26 (1.02)	38.1 (1.5)	9.5 (0.37)	8
2 in. ASME CL 1500	NA	60 (2.36)	58 (2.28)	62 (2.44)	92 (3.62)	165 (6.5)	215.9 (8.5)	26 (1.02)	38.1 (1.5)	9.5 (0.37)	8
3 in. ASME CL 150	72 (2.83)	89 (3.5)	75 (2.95)	92 (3.62)	127 (5)	152.4 (6)	190.5 (7.5)	19.1 (0.79)	22.4 (0.88)	9.5 (0.37)	4
3 in. ASME CL 300	72 (2.83)	89 (3.5)	75 (2.95)	92 (3.62)	127 (5)	168.15 (6.62)	209.6 (8.25)	22.4 (0.88)	26.9 (1.1)	9.5 (0.37)	8
3 in. ASME CL 600	NA	89 (3.5)	75 (2.95)	92 (3.62)	127 (5)	168.15 (6.62)	209.6 (8.25)	22.4 (0.88)	31.8 (1.3)	9.5 (0.37)	8
3 in. ASME CL 900	NA	89 (3.5)	75 (2.95)	92 (3.62)	127 (5)	190.5 (7.5)	241 (9.48)	26 (1.02)	38.1 (1.5)	9.5 (0.37)	8
3 in. ASME CL1500	NA	89 (3.5)	75 (2.95)	92 (3.62)	127 (5)	203.2 (8)	266.7 (10.5)	31.75 (1.25)	47.7 (1.88)	9.5 (0.37)	8
4 in. ASME CL 150	94 (3.7)	89 (3.5)	75 (2.95)	92 (3.62)	157.2 (6.2)	190.5 (7.5)	228.6 (9)	19.1 (0.79)	22.4 (0.88)	9.5 (0.37)	8
4 in. ASME CL 300	94 (3.7)	89 (3.5)	75 (2.95)	92 (3.62)	157.2 (6.2)	200.2 (7.88)	254 (10)	22 (0.86)	30.2 (1.19)	9.5 (0.37)	8

Size/Rating	Dimensions mm. (in.) for S26RE										
	A (dia)				B (dia)	C (dia)	D (dia)	E (dia)	F (Note 2)	G	N° of holes
	extended diaphragm	flush diaphragm		flushing ring internal dia							
DN 50 EN PN 16	48 (1.9)	60 (2.36)	58 (2.28)	62 (2.44)	102 (4.02)	125 (4.92)	165 (6.5)	18 (0.71)	15 (0.58)	9.5 (0.37)	4
DN 50 EN PN 40	48 (1.9)	60 (2.36)	58 (2.28)	62 (2.44)	102 (4.02)	125 (4.92)	165 (6.5)	18 (0.71)	18 (0.67)	9.5 (0.37)	4
DN 50 EN PN 63	NA	60 (2.36)	58 (2.28)	62 (2.44)	102 (4.02)	135 (5.31)	180 (7.08)	22 (0.86)	23 (0.9)	9.5 (0.37)	4
DN 50 EN PN 100	NA	60 (2.36)	58 (2.28)	62 (2.44)	102 (4.02)	145 (5.71)	195 (7.67)	26 (1.02)	27 (1.06)	9.5 (0.37)	4
DN 80 EN PN 16	72 (2.83)	89 (3.5)	75 (2.95)	92 (3.62)	138 (5.43)	160 (6.3)	200 (7.87)	18 (0.71)	17 (0.67)	9.5 (0.37)	8
DN 80 EN PN 40	72 (2.83)	89 (3.5)	75 (2.95)	92 (3.62)	138 (5.43)	160 (6.3)	200 (7.87)	18 (0.71)	21 (0.83)	9.5 (0.37)	8
DN 80 EN PN 63	NA	89 (3.5)	75 (2.95)	92 (3.62)	138 (5.43)	170 (6.7)	215 (8.46)	22 (0.86)	25 (0.98)	9.5 (0.37)	8
DN 80 EN PN 100	NA	89 (3.5)	75 (2.95)	92 (3.62)	138 (5.43)	180 (7.08)	230 (9.05)	26 (1.02)	33 (1.3)	9.5 (0.37)	8
DN 100 EN PN 16	94 (3.7)	89 (3.5)	75 (2.95)	92 (3.62)	158 (6.22)	180 (7.08)	220 (8.66)	18 (0.71)	17 (0.67)	9.5 (0.37)	8
DN 100 EN PN 40	94 (3.7)	89 (3.5)	75 (2.95)	92 (3.62)	162 (6.38)	190 (7.48)	235 (9.25)	22 (0.86)	21 (0.83)	9.5 (0.37)	8

Size/Rating	Dimensions mm. (in.) for S26RJ								
	A (dia) flush diaphragm		B (dia)	C (dia)	D (dia)	E (dia)	F (Note 3)	G	N° of holes
A50 Class 10K	60 (2.36)		96 (3.78)	120 (4.72)	155 (6.1)	19 (0.75)	16 (0.63)	9.5 (0.37)	4
A50 Class 20K	60 (2.36)		96 (3.78)	120 (4.72)	155 (6.1)	19 (0.75)	18 (0.71)	9.5 (0.37)	8
A50 Class 40K	60 (2.36)		104.3 (4.11)	130 (5.12)	165 (6.5)	19 (0.75)	26 (1.02)	9.5 (0.37)	8
A80 Class 10K	89 (3.5)		126 (4.96)	150 (5.91)	185 (7.28)	19 (0.75)	18 (0.71)	9.5 (0.37)	8
A80 Class 20K	89 (3.5)		132 (5.2)	160 (6.3)	200 (7.87)	23 (0.91)	22 (0.87)	9.5 (0.37)	8
A80 Class 40K	89 (3.5)		139.4 (5.49)	170 (6.69)	210 (8.27)	23 (0.91)	32 (1.26)	9.5 (0.37)	8
A100 Class 10K	89 (3.5)		151 (5.94)	175 (6.89)	210 (8.27)	19 (0.75)	18 (0.71)	9.5 (0.37)	8
A100 Class 20K	89 (3.5)		160 (6.3)	185 (7.28)	225 (8.86)	23 (0.91)	24 (0.94)	9.5 (0.37)	8

Note 1 - Flange thickness tolerance is +3.0 / -0.0 mm. (+0.12 / 0.0 in.).



Note 2 - Flange thickness tolerance is +1.0 / -1.3 mm. (+0.04 / 0.05 in.) up to 18 mm. or ±1.5 mm. (±0.06 in.) from 18 to 50 mm.

Note 3 - Flange thickness tolerance is +1.5 / -0.0 mm. (+0.06 / 0.0 in.) up to Class 20K or +2.0 / -0.0 mm. (+0.08 / 0.0 in.) from Class 20K to Class 50K.



**S26RH Rotating flange diaphragm seals according to ISO 10423 (based on API 6A specification)**

**266HRH with barrel housing and direct mount seal S26RH**  
**flush diaphragm seals (flush) to ISO 10423**

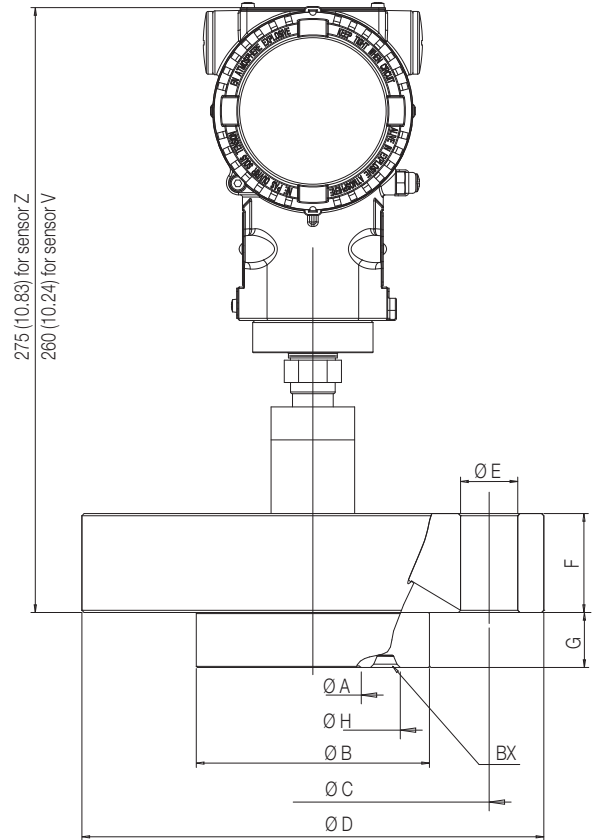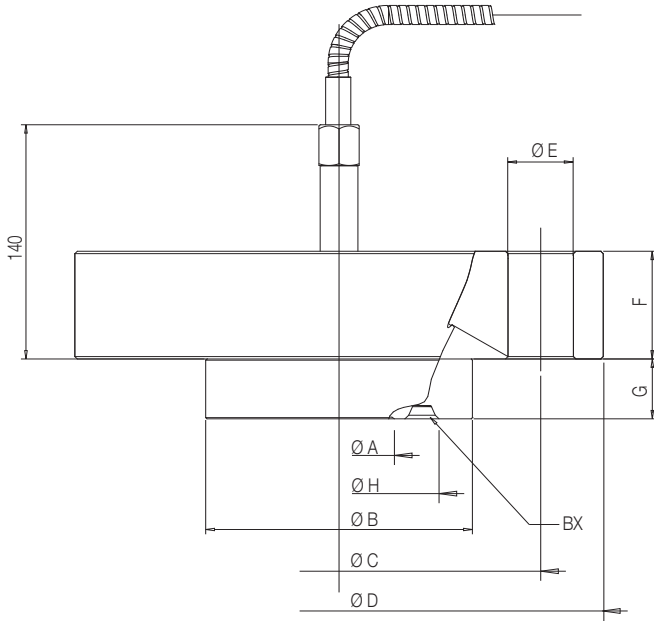


Size/Rating	Dimensions mm. (in.) for S26RH									
	A (dia)	B (dia)	C (dia)	D (dia)	E (dia)	F	G	H (dia)	BX	N° of holes
1 13/16 in. API 10000	40 (1.57)	105.5 (4.15)	146.1 (5.75)	185 (7.28)	23 (0.91)	42.1 (1.66)	25 (0.98)	77.77 (3.06)	BX 151	8
1 13/16 in. API 15000	40 (1.57)	105.5 (4.15)	160.3 (6.31)	210 (8.27)	26 (1.02)	45 (1.77)	25 (0.98)	77.77 (3.06)	BX 151	8
2 1/16 in. API 10000	50 (1.97)	112.5 (4.43)	158.8 (6.25)	200 (7.87)	23 (0.91)	44.1 (1.74)	25 (0.98)	86.23 (3.40)	BX 152	8
2 1/16 in. API 15000	50 (1.97)	112.5 (4.43)	174.6 (6.87)	220 (8.66)	26 (1.02)	50.8 (2.00)	25 (0.98)	86.23 (3.40)	BX 152	8

# Model 266DRH Differential

## Model 266HRH Gauge


## Model 266NRH Absolute

### S26RR Rotating flange diaphragm seals - Ring Joint (RJ)

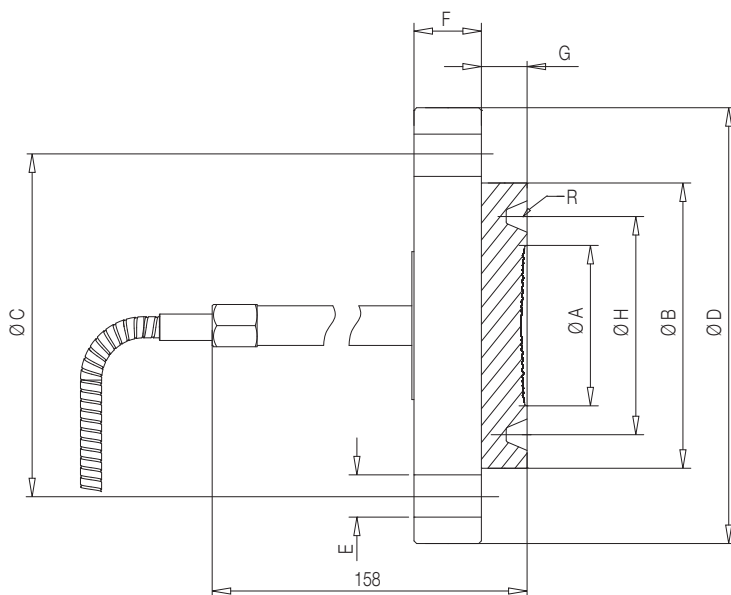


Size/Rating	Dimensions mm. (in.) for S26RR									
	A (dia)	B (dia)	C (dia)	D (dia)	E (dia)	F	G	H (dia)	R	N° of holes
1-1/2 in. ASME CL 150	48 (1.89)	83 (3.27)	98.6 (3.88)	127 (5)	15.75 (0.62)	17.5 (0.69)	17.3 (0.68)	65.1 (2.56)	R19	4
1-1/2 in. ASME CL 300	48 (1.89)	90 (3.54)	114.3 (4.5)	155.5 (6.12)	22.35 (0.88)	20.6 (0.81)	17.3 (0.68)	68.3 (2.69)	R20	4
1-1/2 in. ASME CL 600	48 (1.89)	90 (3.54)	114.3 (4.5)	155.5 (6.12)	22.35 (0.88)	22.4 (0.88)	17.3 (0.68)	68.3 (2.69)	R20	4
1-1/2 in. ASME CL 900/1500	48 (1.89)	92 (3.62)	124 (4.88)	177.8 (7)	28.45 (1.12)	31.8 (1.25)	20.8 (0.82)	68.3 (2.69)	R20	4
1-1/2 in. ASME CL 2500	48 (1.89)	114 (4.49)	146.1 (5.75)	203.2 (8)	31.75 (1.25)	44.5 (1.75)	20.8 (0.82)	82.6 (3.25)	R23	4
2 in. ASME CL 150	60 (2.36)	102 (4.02)	120.65 (4.75)	152.4 (6)	19.05 (0.75)	19.05 (0.75)	17.3 (0.68)	82.6 (3.25)	R22	4
2 in. ASME CL 300	60 (2.36)	108 (4.25)	127 (5)	165.1 (6.5)	19.05 (0.75)	22.35 (0.88)	17.3 (0.68)	82.6 (3.25)	R23	8
2 in. ASME CL 600	60 (2.36)	108 (4.25)	127 (5)	165.1 (6.5)	19.05 (0.75)	25.4 (1)	17.3 (0.68)	82.6 (3.25)	R23	8
2 in. ASME CL 900/1500	60 (2.36)	124 (4.88)	165 (6.5)	215.9 (8.5)	25.4 (1)	38.1 (1.5)	20.8 (0.82)	95.3 (3.75)	R24	8
2 in. ASME CL 2500	60 (2.36)	133 (5.24)	171.5 (6.75)	235 (9.25)	28.45 (1.12)	50.8 (2)	20.8 (0.82)	101.6 (4)	R26	8
3 in. ASME CL 150	89 (3.5)	133 (5.24)	152.4 (6)	190.5 (7.5)	19.05 (0.75)	23.87 (0.94)	17.3 (0.68)	114.3 (4.5)	R29	4
3 in. ASME CL 300	89 (3.5)	146 (5.75)	168.15 (6.62)	209.55 (8.25)	22.35 (0.88)	28.44 (1.12)	17.3 (0.68)	123.8 (4.87)	R31	8
3 in. ASME CL 600	89 (3.5)	146 (5.75)	168.15 (6.62)	209.55 (8.25)	22.35 (0.88)	31.75 (1.25)	17.3 (0.68)	123.8 (4.87)	R31	8
3 in. ASME CL 900	89 (3.5)	155 (6.10)	190.5 (7.5)	241.3 (9.5)	25.4 (1)	38.1 (1.50)	20.8 (0.82)	123.8 (4.87)	R31	8
3 in. ASME CL 1500	89 (3.5)	168 (6.61)	203.2 (8)	266.7 (10.5)	31.75 (1.25)	47.8 (1.88)	20.8 (0.82)	136.5 (5.37)	R35	8
3 in. ASME CL 2500	89 (3.5)	168 (6.61)	228.6 (9)	304.8 (12)	35.05 (1.38)	66.5 (2.62)	20.8 (0.82)	127 (5)	R32	8

266DRH with barrel housing and direct mount seal S26RR flanged Ring Joint flush diaphragm

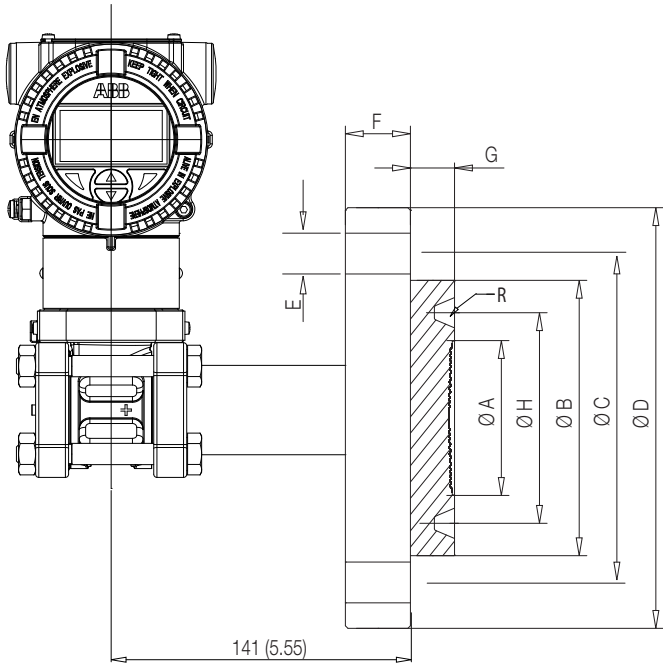


266HRH / 266NRH with barrel housing and direct mount seal S26RR flanged Ring Joint flush diaphragm

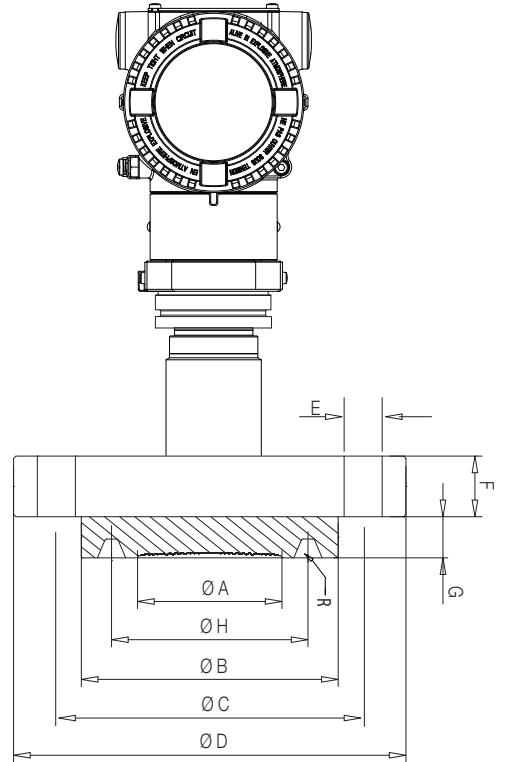


Model 266DRH Differential  
 Model 266HRH Gauge  
 Model 266NRH Absolute

S26FA, S26FE Fixed flange diaphragm seals

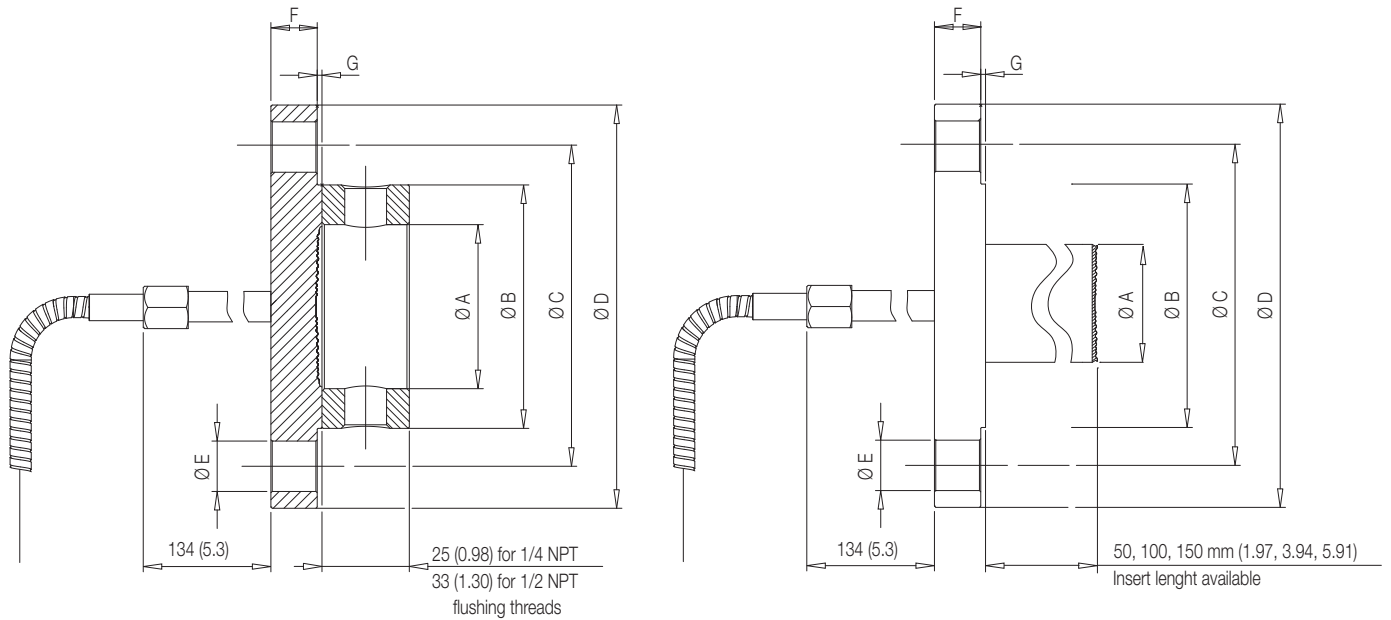

ASME and EN 1092-1 smooth and Form B1 (flushing ring as option, only for flush version)

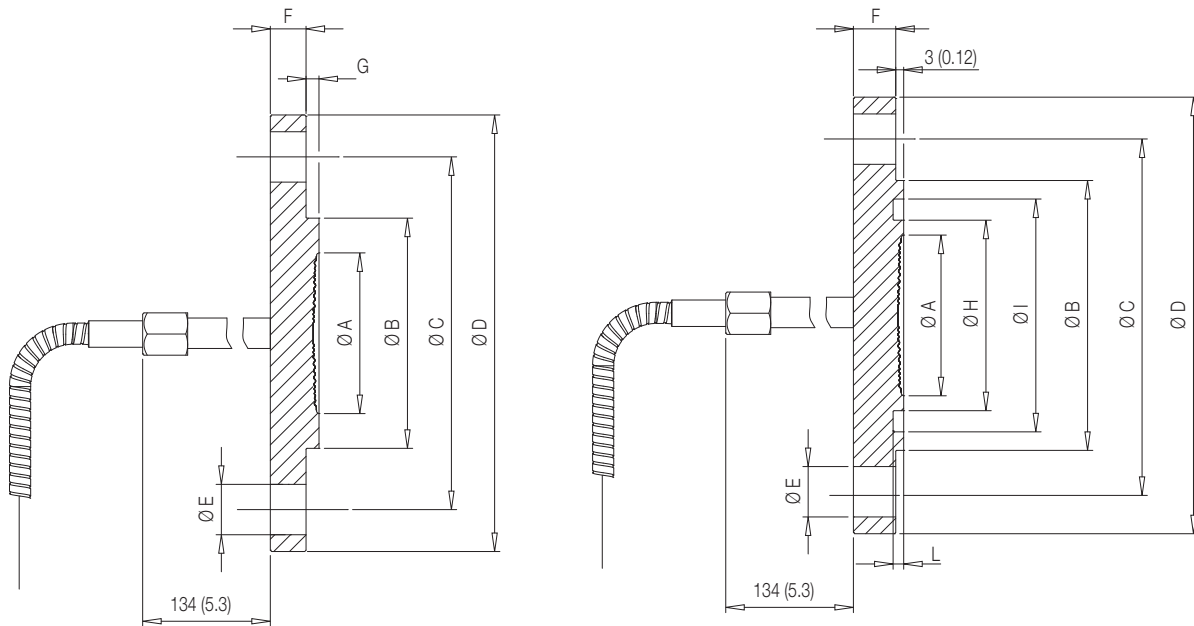


EN 1092-1 Form E

EN 1092-1 Form D


Note 1 - Flange thickness tolerance is +3.0 / -0.0 mm (+0.12 / -0.0 in.).

Note 2 - Flange thickness tolerance is +1.0 / -1.3 mm (+0.04 / -0.05 in.) up to 18 mm or  $\pm 1.5$  mm ( $\pm 0.06$  in.) from 18 to 50 mm from 18 to 50 mm.

**266DRH with barrel housing and direct mount seal S26FA/S26FE fixed flange Raised Face flush diaphragm**

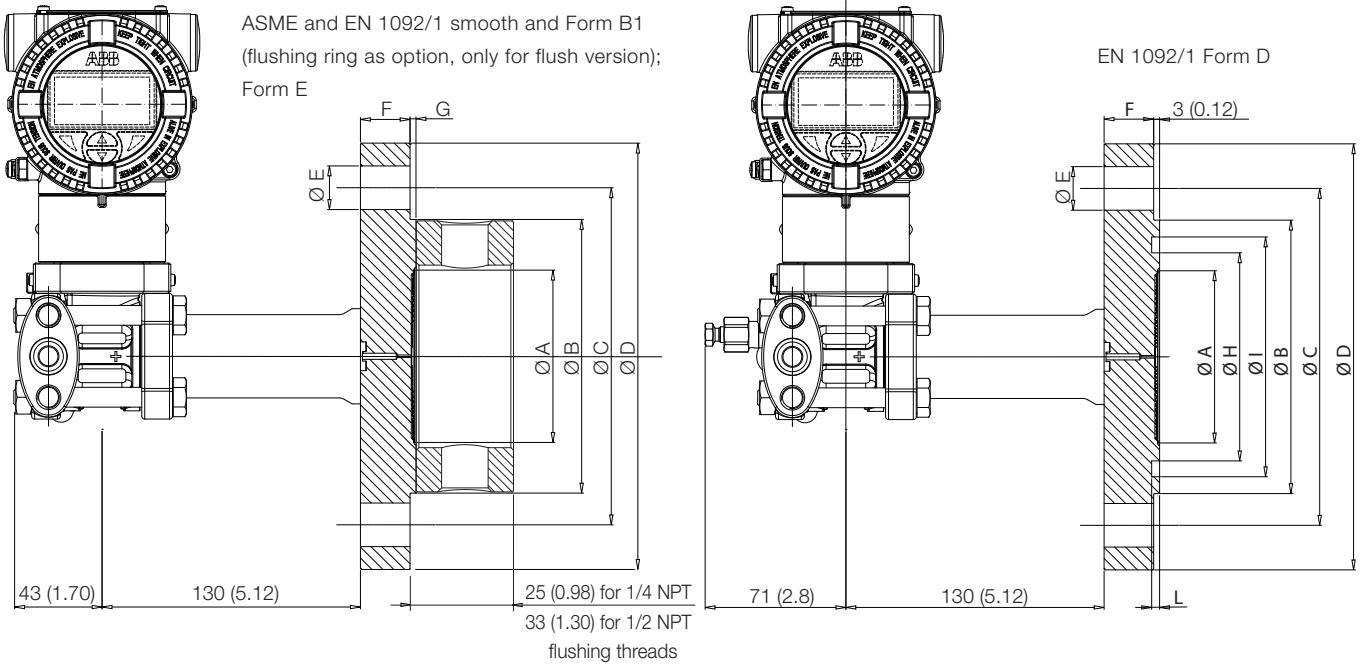

**266HRH/266NRH with barrel housing and direct mount seal S26FA/S26FE fixed flange Raised Face**

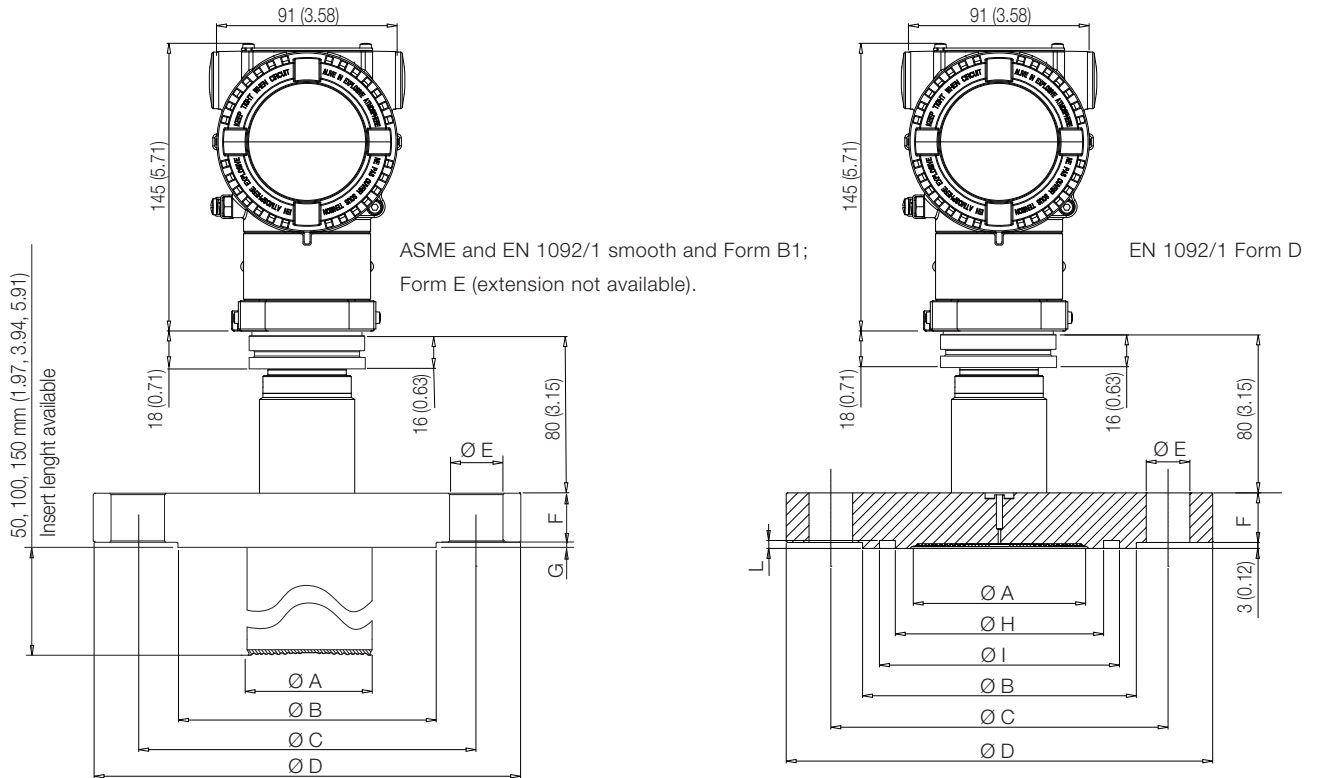

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

Size/Rating	Dimensions mm. (in.) for S26FA											
	A (dia)				flushing ring internal dia	B (dia)	C (dia)	D (dia)	E (dia)	F (Note 1)	G	N° of holes
	extended diaphragm	flush diaphragm		std.								
2 in. ASME CL 150	48 (1.9)	60 (2.36)	58 (2.28)	62 (2.44)	92 (3.62)	120.65 (4.75)	152.4 (6)	19.1 (0.79)	17.5 (0.6)	2 (0.08)	4	
2 in. ASME CL 300	48 (1.9)	60 (2.36)	58 (2.28)	62 (2.44)	92 (3.62)	127 (5)	165.1 (6.5)	19.1 (0.79)	20.8 (0.8)	2 (0.08)	8	
2 in. ASME CL 600	48 (1.9)	60 (2.36)	58 (2.28)	62 (2.44)	92 (3.62)	127 (5)	165.1 (6.5)	19.1 (0.79)	25.4 (1)	7 (0.27)	8	
3 in. ASME CL 150	72 (2.83)	89 (3.5)	75 (2.95)	92 (3.62)	127 (5)	152.4 (6)	190.5 (7.5)	19.1 (0.79)	22.4 (0.88)	2 (0.08)	4	
3 in. ASME CL 300	72 (2.83)	89 (3.5)	75 (2.95)	92 (3.62)	127 (5)	168.15 (6.62)	209.6 (8.25)	22.4 (0.86)	26.9 (1.1)	2 (0.08)	8	
3 in. ASME CL 600	72 (2.83)	89 (3.5)	75 (2.95)	92 (3.62)	127 (5)	168.15 (6.62)	209.6 (8.25)	22.4 (0.86)	31.8 (1.3)	7 (0.27)	8	
4 in. ASME CL 150	94 (3.7)	89 (3.5)	75 (2.95)	92 (3.62)	157.2 (6.2)	190.5 (7.5)	228.6 (9)	19.1 (0.79)	22.4 (0.88)	2 (0.08)	8	

Size/Rating	Dimensions mm. (in.) for S26FE smooth and Form B1											
	A (dia)				flushing ring internal dia	B (dia)	C (dia)	D (dia)	E (dia)	F (Note 2)	G	N° of holes
	extended diaphragm	flush diaphragm		std.								
DN 50 EN PN 16	48 (1.9)	60 (2.36)	58 (2.28)	62 (2.44)	102 (4.02)	125 (4.92)	165 (6.5)	18 (0.71)	15 (0.58)	3 (0.12)	4	
DN 50 EN PN 40	48 (1.9)	60 (2.36)	58 (2.28)	62 (2.44)	102 (4.02)	125 (4.92)	165 (6.5)	18 (0.71)	18 (0.67)	3 (0.12)	4	
DN 50 EN PN 63	NA	60 (2.36)	58 (2.28)	62 (2.44)	102 (4.02)	135 (5.31)	180 (7.08)	22 (0.86)	23 (0.9)	3 (0.12)	4	
DN 50 EN PN 100	NA	60 (2.36)	58 (2.28)	62 (2.44)	102 (4.02)	145 (5.71)	195 (7.67)	26 (1.02)	27 (1.06)	3 (0.12)	4	
DN 80 EN PN 16	72 (2.83)	89 (3.5)	75 (2.95)	92 (3.62)	138 (5.43)	160 (6.3)	200 (7.87)	18 (0.71)	17 (0.67)	3 (0.12)	8	
DN 80 EN PN 40	72 (2.83)	89 (3.5)	75 (2.95)	92 (3.62)	138 (5.43)	160 (6.3)	200 (7.87)	18 (0.71)	21 (0.83)	3 (0.12)	8	
DN 80 EN PN 63	NA	89 (3.5)	75 (2.95)	92 (3.62)	138 (5.43)	170 (6.7)	215 (8.46)	22 (0.86)	25 (0.98)	3 (0.12)	8	
DN 80 EN PN 100	NA	89 (3.5)	75 (2.95)	92 (3.62)	138 (5.43)	180 (7.08)	230 (9.05)	26 (1.02)	33 (1.3)	3 (0.12)	8	
DN 100 EN PN 16	94 (3.7)	89 (3.5)	75 (2.95)	92 (3.62)	158 (6.22)	180 (7.08)	220 (8.66)	18 (0.71)	17 (0.67)	3 (0.12)	8	

Note 1 - Flange thickness tolerance is +3.0 / -0.0 mm. (+0.12 / 0.0 in.).

Note 2 - Flange thickness tolerance is +1.0 / -1.3 mm. (+0.04 / 0.05 in.) up to 18 mm. or ±1.5 mm. (±0.06 in.) from 18 to 50 mm.


Size/Rating	Dimensions mm. (in.) for S26FE Form E								
	diaphragm A (dia)		B (dia)	C (dia)	D (dia)	E (dia)	F (Note 2)	G	N° of holes
	std. thickness	low thickness							
DN 50 EN PN 16	60 (2.36)	58 (2.28)	87 (3.42)	125 (4.92)	165 (6.5)	18 (0.71)	13.5 (0.53)	4.5 (0.18)	4
DN 50 EN PN 40	60 (2.36)	58 (2.28)	87 (3.42)	125 (4.92)	165 (6.5)	18 (0.71)	15.5 (0.61)	4.5 (0.18)	4
DN 50 EN PN 63	60 (2.36)	58 (2.28)	87 (3.42)	135 (5.31)	180 (7.08)	22 (0.86)	21.5 (0.85)	4.5 (0.18)	4
DN 50 EN PN 100	60 (2.36)	58 (2.28)	87 (3.42)	145 (5.71)	195 (7.67)	26 (1.02)	25.5 (1)	4.5 (0.18)	4
DN 80 EN PN 16	89 (3.5)	75 (2.95)	120 (4.72)	160 (6.3)	200 (7.87)	18 (0.71)	15.5 (0.61)	4.5 (0.18)	8
DN 80 EN PN 40	89 (3.5)	75 (2.95)	120 (4.72)	160 (6.3)	200 (7.87)	18 (0.71)	19.5 (0.77)	4.5 (0.18)	8
DN 80 EN PN 63	89 (3.5)	75 (2.95)	120 (4.72)	170 (6.7)	215 (8.46)	22 (0.86)	23.5 (0.92)	4.5 (0.18)	8
DN 80 EN PN 100	89 (3.5)	75 (2.95)	120 (4.72)	180 (7.08)	230 (9.05)	26 (1.02)	31.5 (1.24)	4.5 (0.18)	8

Size/Rating	Dimensions mm. (in.) for S26FE Form D										
	diaphragm A (dia)		B (dia)	C (dia)	D (dia)	E (dia)	F (Note 2)	H (dia)	I (dia)	L	N° of holes
	std. thickness	low thickness									
DN 50 EN PN 16	60 (2.36)	58 (2.28)	102 (4.02)	125 (4.92)	165 (6.5)	18 (0.71)	15 (0.59)	72 (2.83)	88 (3.46)	4 (0.16)	4
DN 50 EN PN 40	60 (2.36)	58 (2.28)	102 (4.02)	125 (4.92)	165 (6.5)	18 (0.71)	18 (0.71)	72 (2.83)	88 (3.46)	4 (0.16)	4
DN 50 EN PN 63	60 (2.36)	58 (2.28)	102 (4.02)	135 (5.31)	180 (7.08)	22 (0.86)	23 (0.91)	72 (2.83)	88 (3.46)	4 (0.16)	4
DN 50 EN PN 100	60 (2.36)	58 (2.28)	102 (4.02)	145 (5.71)	195 (7.67)	26 (1.02)	27 (1.06)	72 (2.83)	88 (3.46)	4 (0.16)	4
DN 80 EN PN 16	89 (3.5)	75 (2.95)	138 (5.43)	160 (6.3)	200 (7.87)	18 (0.71)	17 (0.67)	105 (4.13)	121 (4.76)	4 (0.16)	8
DN 80 EN PN 40	89 (3.5)	75 (2.95)	138 (5.43)	160 (6.3)	200 (7.87)	18 (0.71)	21 (0.83)	105 (4.13)	121 (4.76)	4 (0.16)	8
DN 80 EN PN 63	89 (3.5)	75 (2.95)	138 (5.43)	170 (6.7)	215 (8.46)	22 (0.86)	25 (0.92)	105 (4.13)	121 (4.76)	4 (0.16)	8
DN 80 EN PN 100	89 (3.5)	75 (2.95)	138 (5.43)	180 (7.08)	230 (9.05)	26 (1.02)	33 (1.3)	105 (4.13)	121 (4.76)	4 (0.16)	8


Note 2 - Flange thickness tolerance is +1.0 / -1.3 mm. (+0.04 / 0.05 in.) up to 18 mm. or ±1.5 mm. (±0.06 in.) from 18 to 50 mm.

# Model 266DRH Differential Model 266HRH Gauge Model 266NRH Absolute


S26MA, S26ME Model off-line flanged diaphragm seal

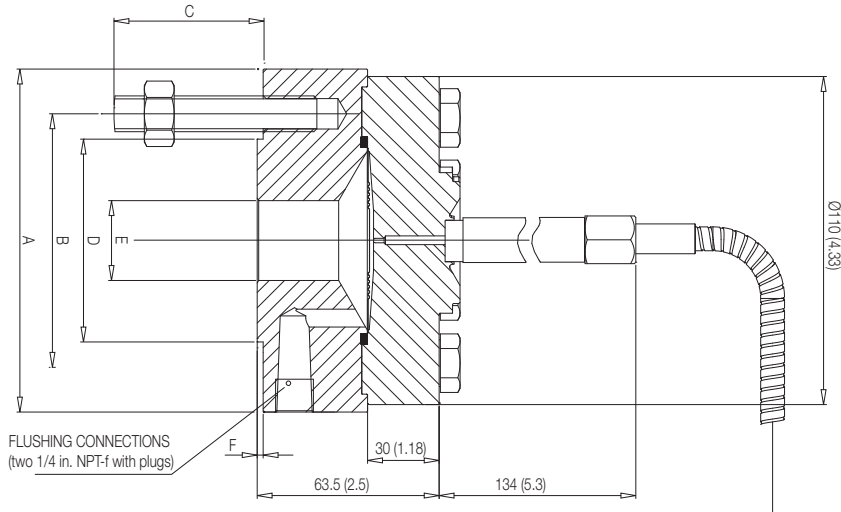

266HRH / 266NRH with barrel housing and direct mount seal S26Mx off-line flanged

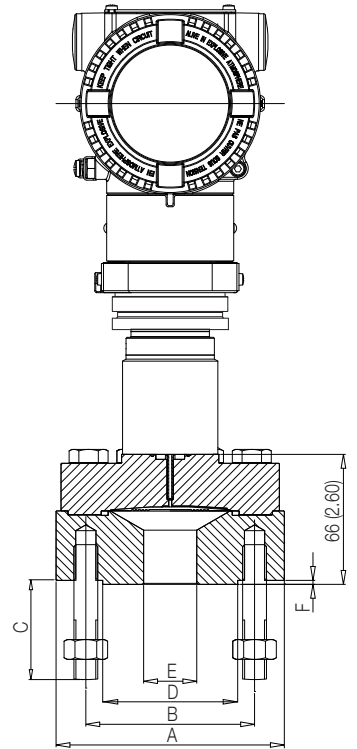

266DRH with barrel housing and direct mount seal S26Mx off-line flanged

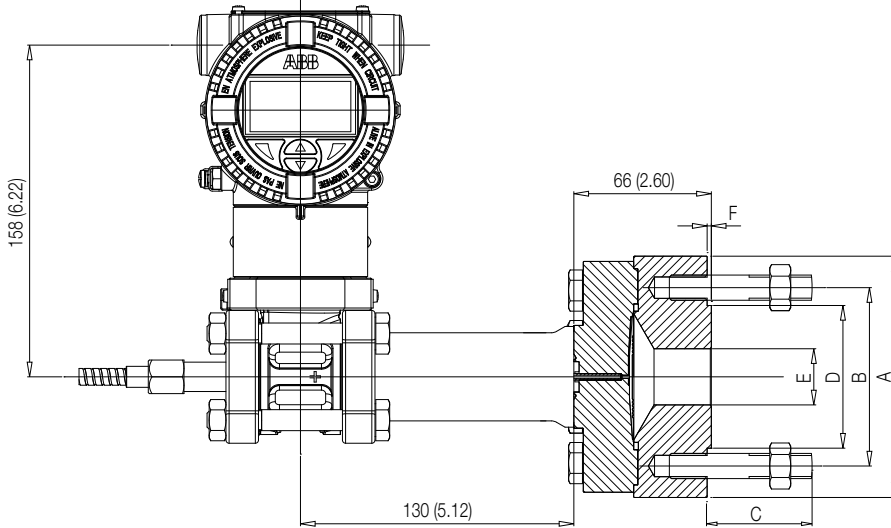


Dimensions mm. (in.) for S26MA and S26ME

Size/Rating	A (dia)	B (dia)	C (4 studs)		D (dia)	E (dia)	F
			Length	Thread			
1/2 in. ASME CL 150	110 (4.33)	60.5 (2.38)	39 (1.53)	1/2 in. – 13 UNC	35.1 (1.38)	15.8 (0.62)	1.6 (0.06)
1/2 in. ASME CL 300	110 (4.33)	66.5 (2.62)	39 (1.53)	1/2 in. – 13 UNC	35.1 (1.38)	15.8 (0.62)	1.6 (0.06)
1 in. ASME CL 150	110 (4.33)	79.4 (3.12)	39 (1.53)	1/2 in. – 13 UNC	50.8 (2)	26.7 (1.05)	1.6 (0.06)
1 in. ASME CL 300	124 (4.88)	88.9 (3.5)	51 (2)	5/8 in. – 11 UNC	50.8 (2)	26.7 (1.05)	1.6 (0.06)
1 1/2 in. ASME CL 150	127 (5)	98.4 (3.87)	39 (1.53)	1/2 in. – 13 UNC	73 (2.87)	41 (1.61)	1.6 (0.06)
1 1/2 in. ASME CL 300	155 (6.1)	114.3 (4.5)	57 (2.24)	3/4 in. – 10 UNC	73 (2.87)	41 (1.61)	1.6 (0.06)
DN 25 PN 16-40	115 (4.52)	85 (3.34)	42 (1.65)	M12	68 (2.67)	28.5 (1.12)	2 (0.08)
DN 40 PN 16-40	150 (5.9)	110 (4.33)	48 (1.89)	M16	88 (3.46)	43.1 (1.69)	3 (0.12)





**S26TT Model off-line threaded diaphragm seal**

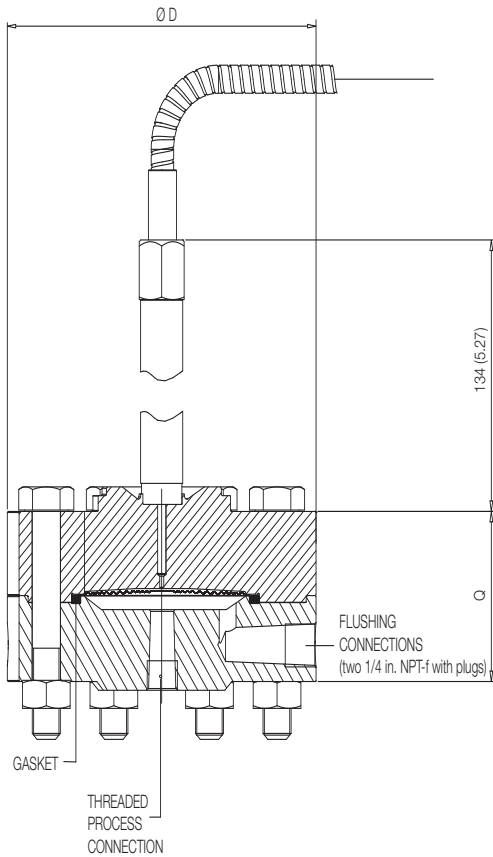

Size (thread)	Dimensions mm. (in.) for S26TT	
	D (dia)	Q
1/4 in. NPT	109.2 (4.3)	53.3 (2.1)
1/2 in. NPT	109.2 (4.3)	53.3 (2.1)
3/4 in. NPT	109.2 (4.3)	63.5 (2.5)
1 in. NPT	109.2 (4.3)	63.5 (2.5)
1 1/2 in. NPT	109.2 (4.3)	63.5 (2.5)


**266HRH / 266NRH with barrel housing and direct mount seal S26TT off-line threaded flange**

**266DRH with barrel housing and direct mount seal S26TT off-line threaded flange**

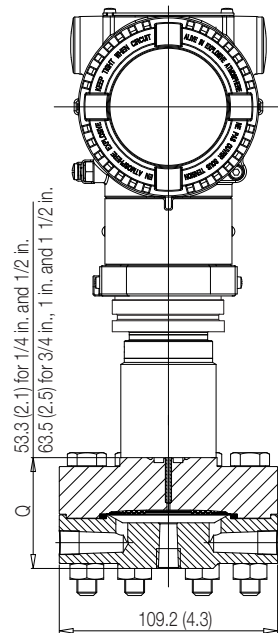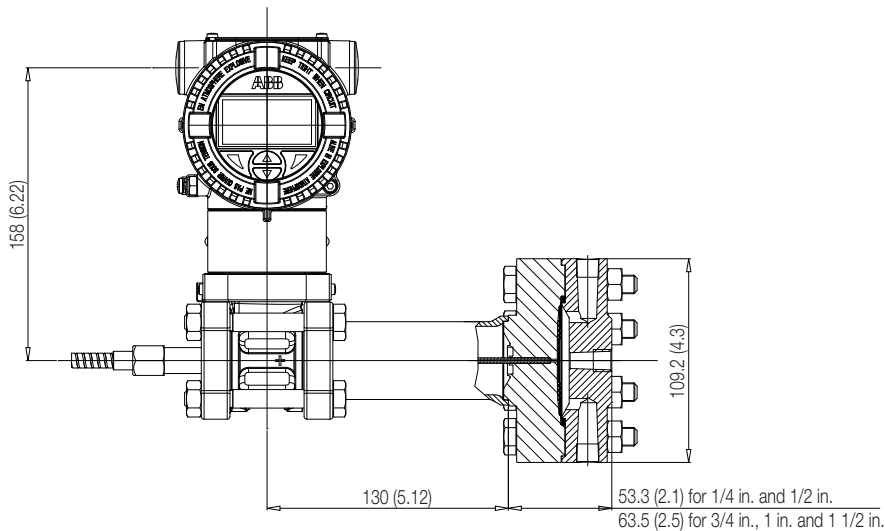


Model 266DRH Differential  
 Model 266HRH Gauge  
 Model 266NRH Absolute

S26SS Union Nut seal

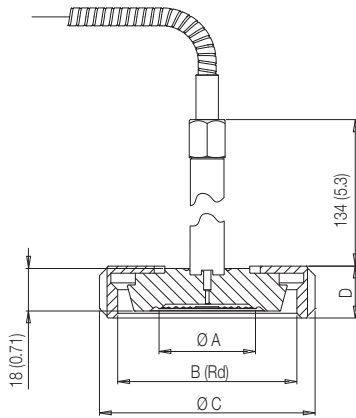


Dimensions mm. (in.) for S26SS				
Union Nut to DIN 11851				
Size	A (dia)	B (Rd)	C (dia)	D
F50	42 (1.65)	78 (3.07)	92 (3.62)	22 (0.87)
F80	72 (2.83)	110 (4.33)	127 (5)	29 (1.14)


266DRH with barrel housing and direct mount seal S26SS Union Nut

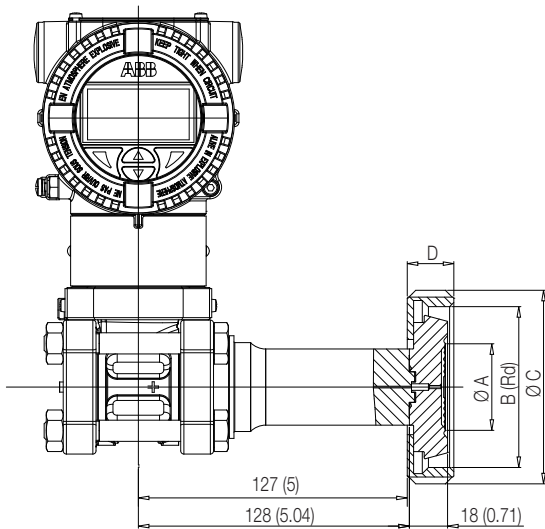

266HRH / 266NRH with barrel housing and direct mount seal S26SS Union Nut

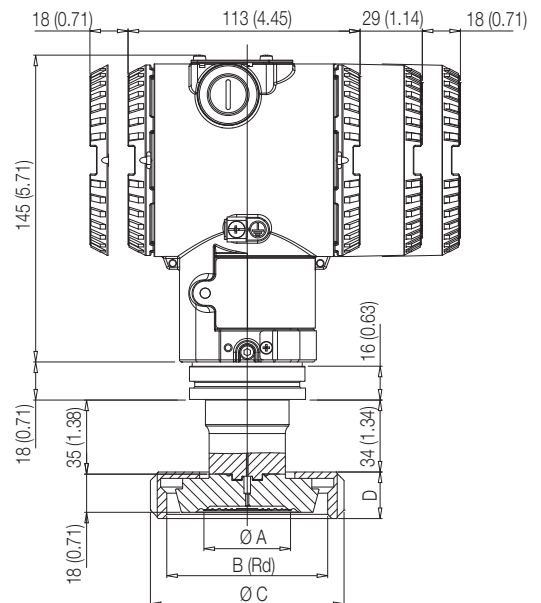


### S26SS Triclamp seal

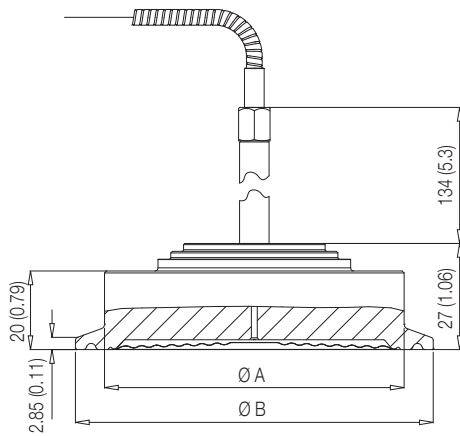


Dimensions mm. (in.) for S26SS Triclamp		
Size	A (dia)	B (dia)
2 in.	56.3 (2.2)	64 (2.5)
3 in.	83 (3.26)	91 (3.58)
4 in.	110.3 (4.34)	119 (4.68)

### 266DRH with barrel housing and direct mount seal S26SS Triclamp

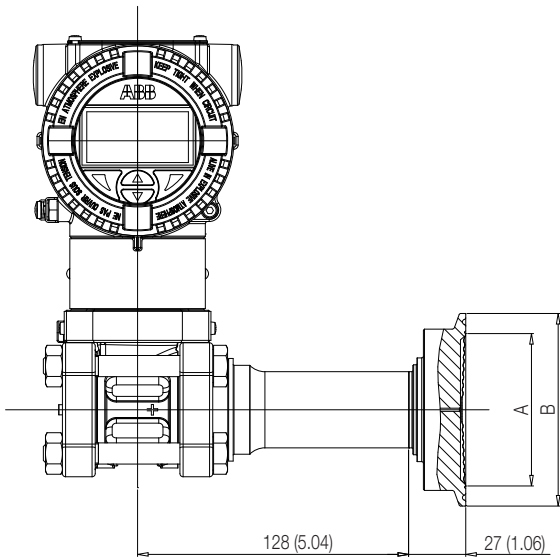


### 266HRH / 266NRH with barrel housing and direct mount seal S26SS Triclamp

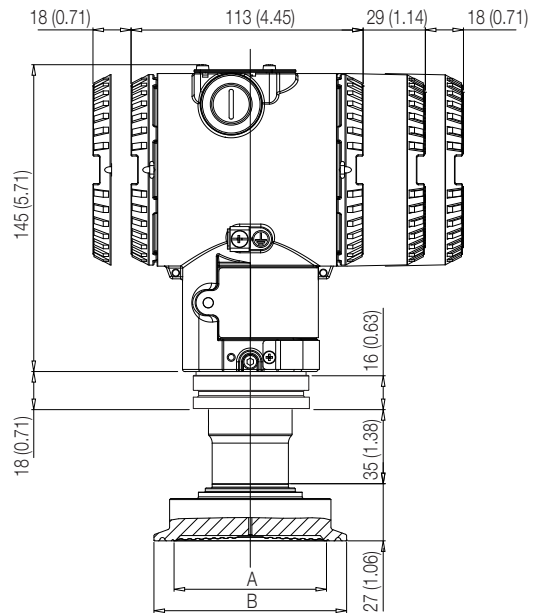


Model 266DRH Differential  
 Model 266HRH Gauge  
 Model 266NRH Absolute

S26SS Cherry Burrell seal

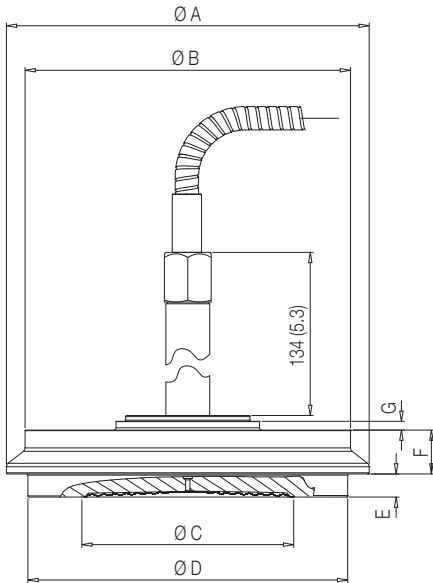


Dimensions mm. (in.) for S26SS Cherry Burrell							
Size	A (dia)	B (dia)	C (dia)	D (dia)	E	F	G
2 in.	67 (2.64)	56 (2.2)	47.7 (1.88)	57 (2.24)	6.5 (0.26)	12.5 (0.49)	3 (0.12)
3 in.	98.4 (3.87)	81 (3.19)	71 (2.80)	83.8 (3.3)	7.9 (0.31)	15 (0.59)	3 (0.12)
4 in.	124 (4.88)	111.25 (4.38)	71 (2.80)	109.3 (4.3)	7.9 (0.31)	15 (0.59)	3 (0.12)


266DRH with barrel housing and direct mount seal S26SS Cherry Burrell

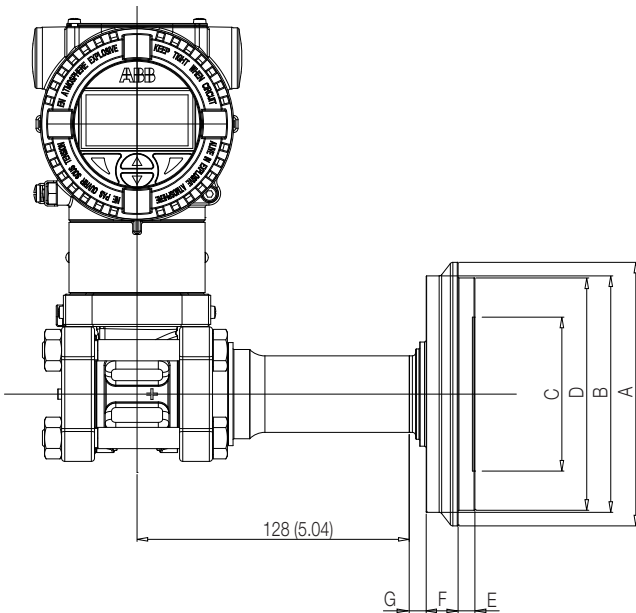


266HRH / 266NRH with barrel housing and direct mount seal S26SS Cherry Burrell

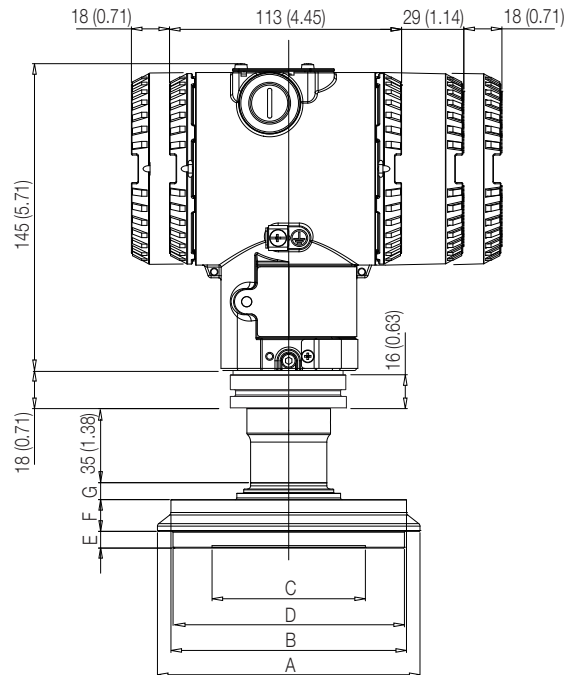


**S26SS Sanitary flush seal**

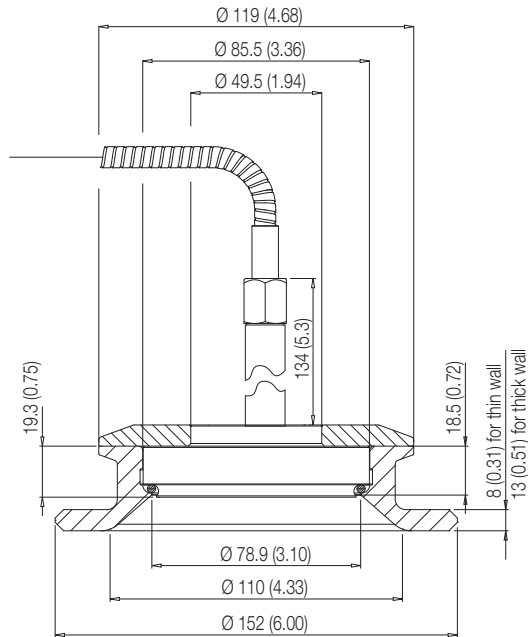

**266DRH with barrel housing and direct mount seal S26SS Sanitary flush**

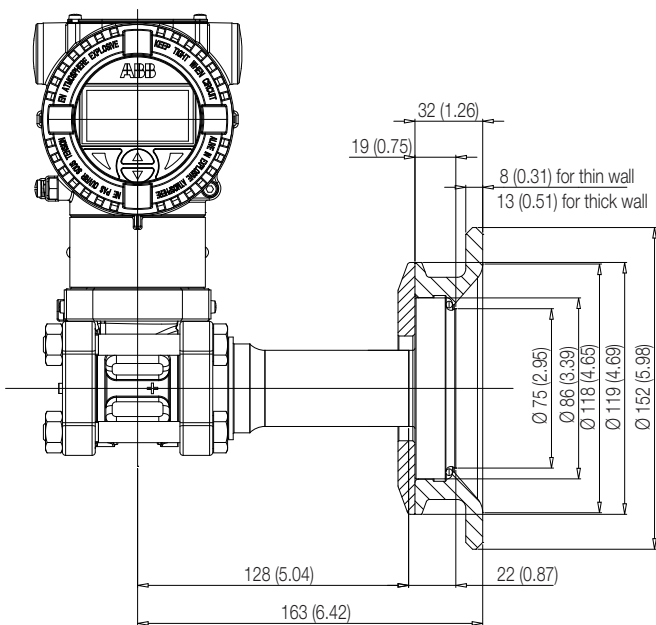


**266HRH / 266NRH with barrel housing and direct mount seal S26SS Sanitary flush**

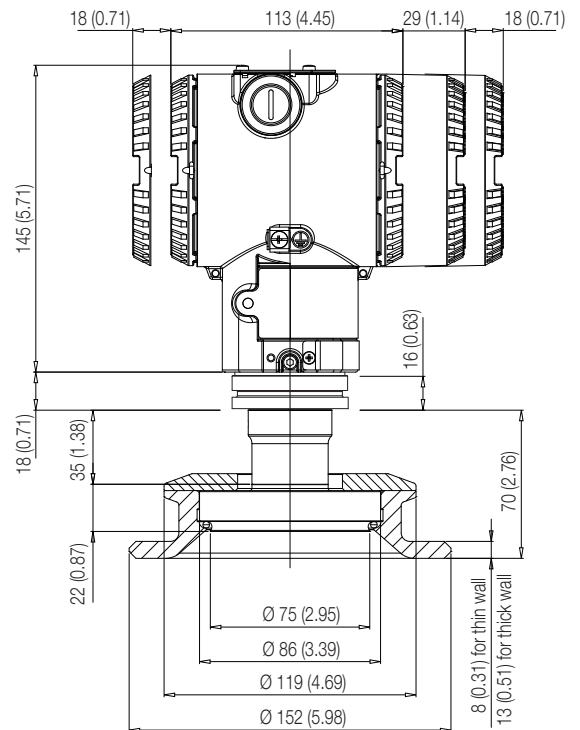

Model 266DRH Differential  
 Model 266HRH Gauge  
 Model 266NRH Absolute


S26SS Sanitary extended seal

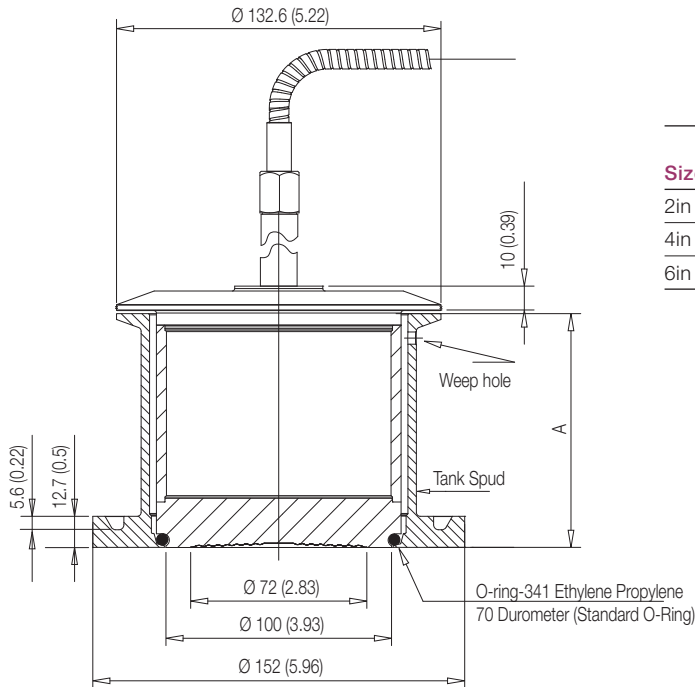


Dimensions mm. (in.) for S26SS Sanitary extended	
Size	A
2in	53.3 (2.1)
4in	104.1 (4.1)
6in	154.9 (6.1)

NOTE: The tank spud required for connection of this seal element must be welded to the process vessel prior to connecting the seal, following a recommended welding and pressure testing procedure.

266DRH with barrel housing and direct mount seal S26SS Sanitary extended

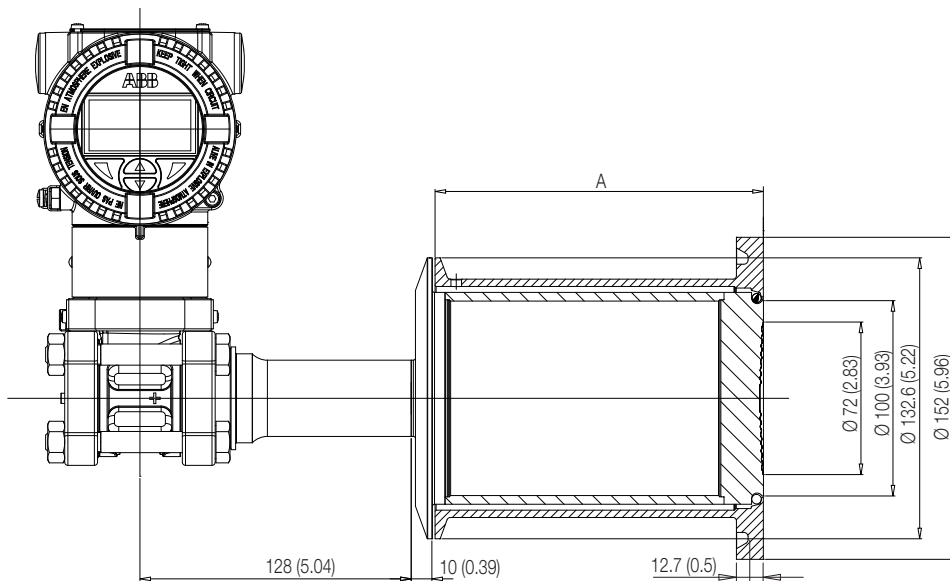


**266HRH / 266NRH with barrel housing and direct mount seal S26SS Sanitary extended**

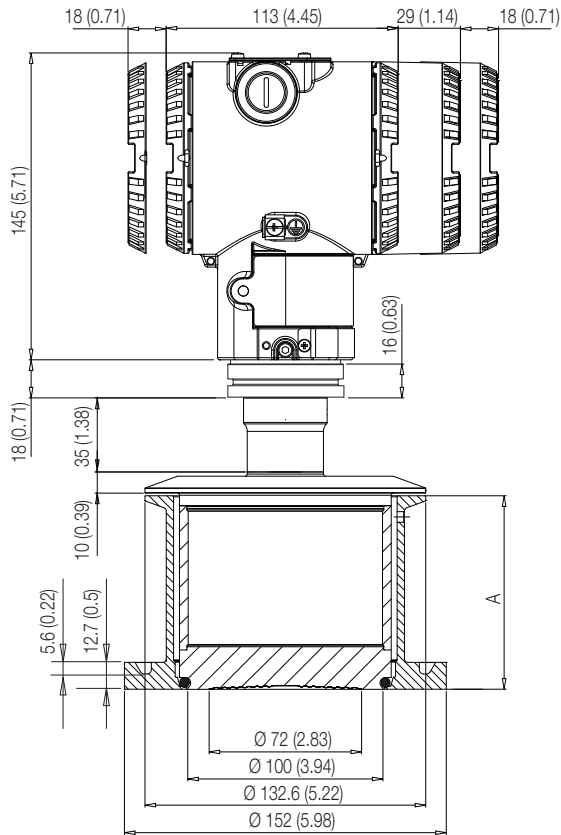


Dimensions mm. (in.) for S26SS Sanitary extended	
Size	A
2in	53.3 (2.1)
4in	104.1 (4.1)
6in	154.9 (6.1)

**266HRH / 266NRH with barrel housing and direct mount seal S26SS beverage bolted**

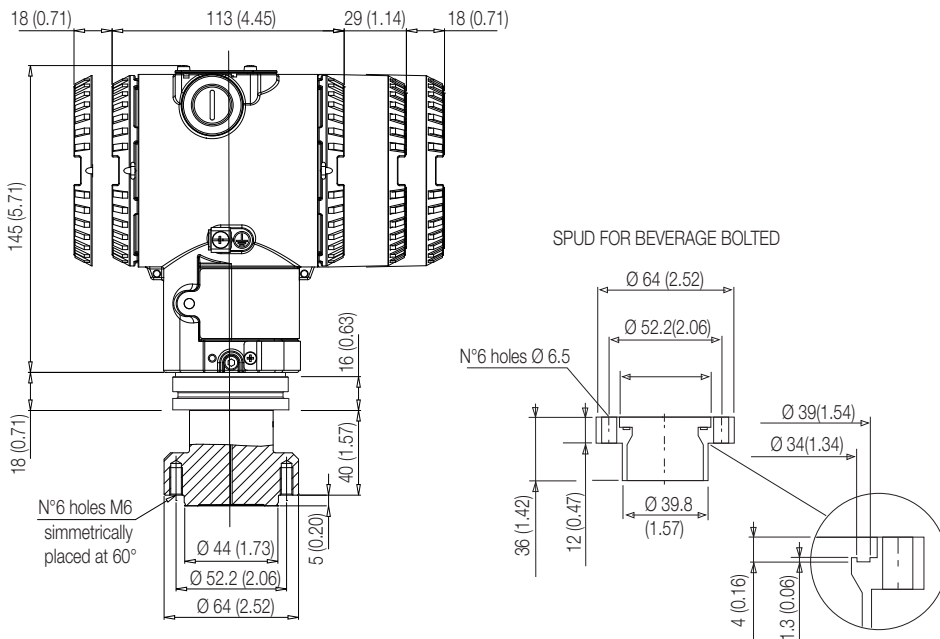


Model 266DRH Differential  
 Model 266HRH Gauge  
 Model 266NRH Absolute

S26SS Sanitary aseptic seal

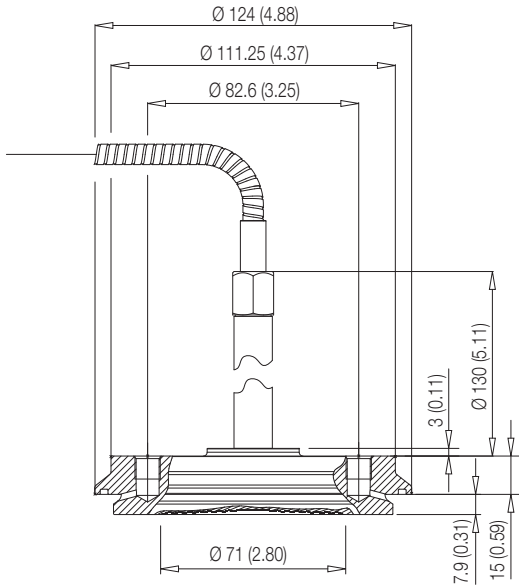


4 in. Cherry Burrell Aseptic

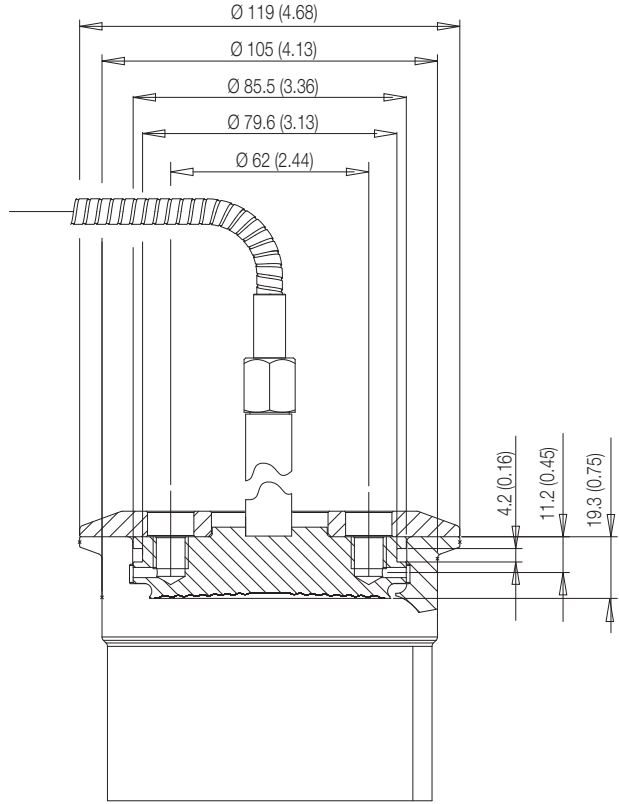

4 in. Aseptic Flanged Connection



## S26VN saddle and socket seal


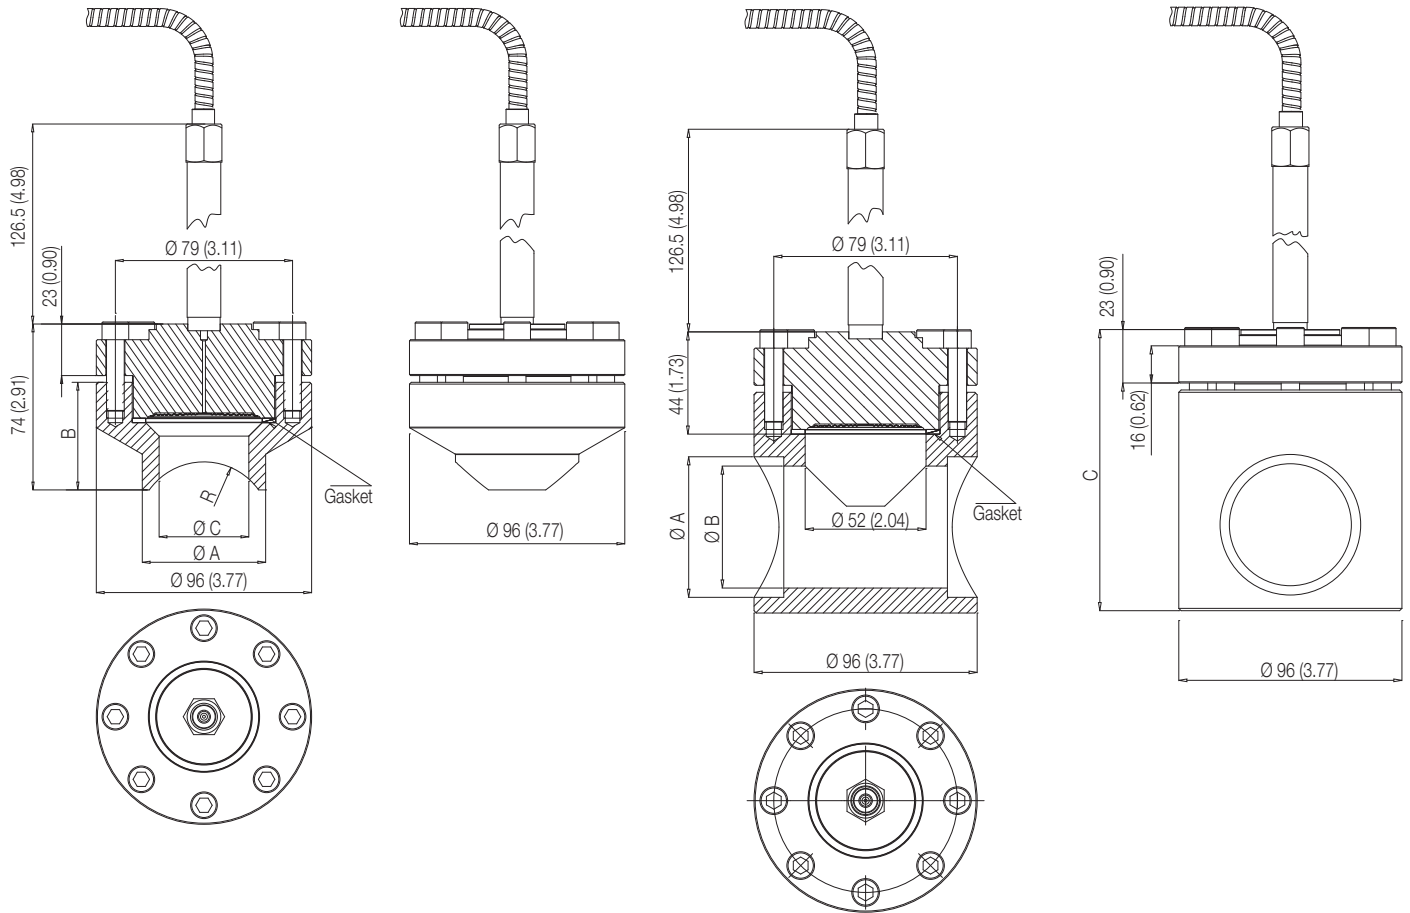


Fitting connection Size	Dimensions mm. (in.) for S26VN- saddle type			
	A (dia)	B	C (dia)	R
Saddle 2 in.	55 (2.17)	48 (1.89)	40 (1.57)	30
Saddle 2 1/2 in.	76 (3.0)	45 (1.77)	52 (2.05)	45
Saddle 3 in.	76 (3.0)	45 (1.77)	50 (1.97)	45
Saddle 4 in.	76 (3.0)	41 (1.61)	50 (1.97)	57
Saddle 5 in.	76 (3.0)	40 (1.57)	50 (1.97)	70
Saddle 6 in.	76 (3.0)	36 (1.42)	50 (1.97)	85



Fitting connection Size	Dimensions mm. (in.) for S26VN- socket type		
	A (dia)	B	C
Socket 1/2 in.	21.8 (0.86)	15.9 (0.63)	86 (3.39)
Socket 3/4 in.	27 (1.06)	21.2 (0.83)	96 (3.78)
Socket 1 in.	33.6 (1.32)	26.8 (1.06)	101 (3.98)
Socket 1 1/2 in.	48.5 (1.91)	41 (1.61)	121 (4.76)
Socket 2 in.	60.5 (2.38)	52.5 (2.07)	121 (4.76)

Model 266DRH Differential  
Model 266HRH Gauge  
Model 266NRH Absolute

266HRH / 266NRH with barrel housing and direct mount seal S26VN saddle and socket

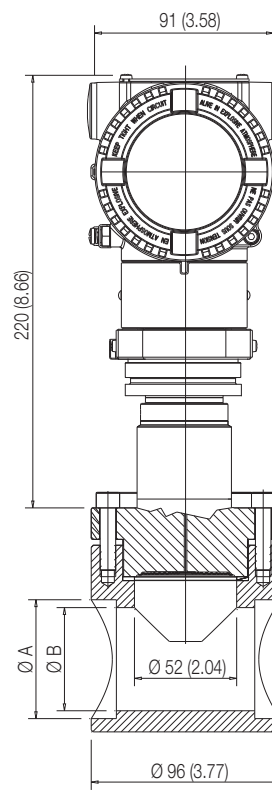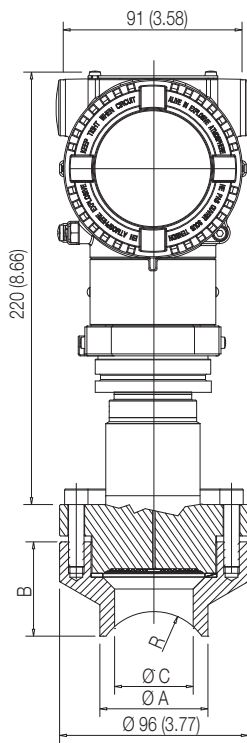



266HRH / 266NRH with barrel housing and direct mount seal S26JN in-line

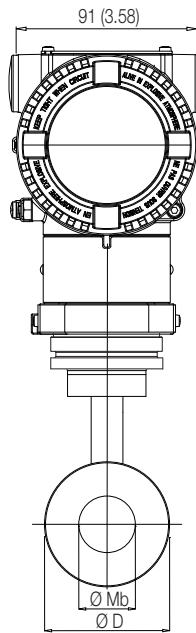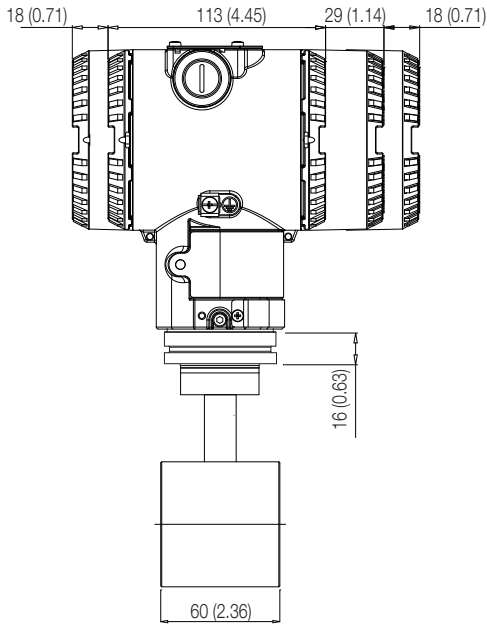



Dimensions mm. (in.) for S26JN		
Size/Rating	D (dia)	Mb (dia)
1 in. / DN 25	63 (2.48)	28.5 (1.12)
1 1/2 in. / DN 40	85 (3.35)	43 (1.69)
2 in. / DN 50	95 (3.74)	54.5 (2.15)
3 in. / DN 80	130 (5.12)	82.5 (3.25)

Model 266DRH Differential  
 Model 266HRH Gauge  
 Model 266NRH Absolute



266HRH / 266NRH with barrel housing and direct mount seal S26KN pulp and paper NPT threaded connections

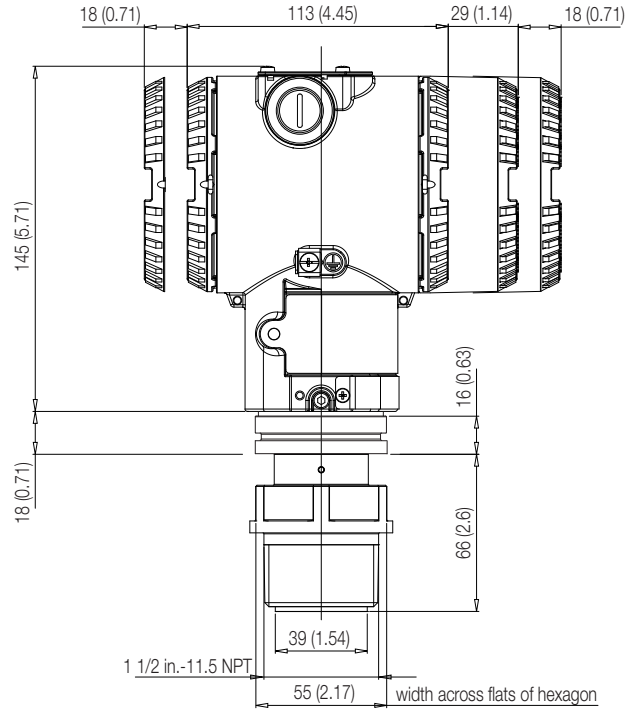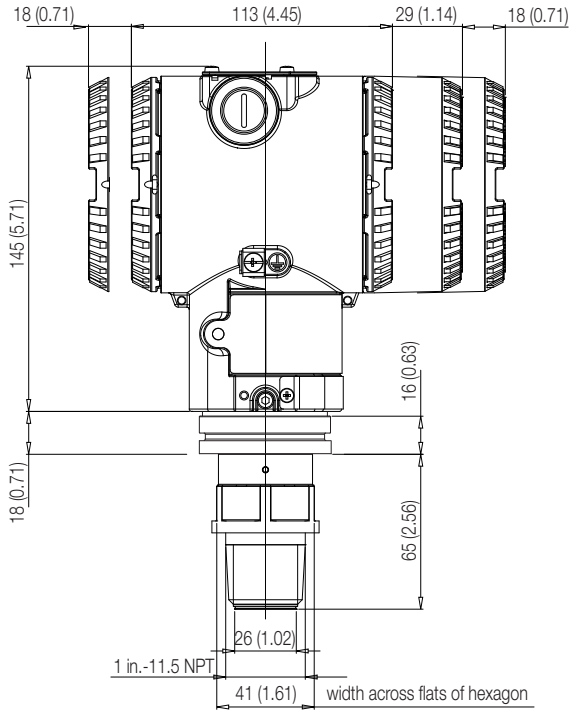


266HRH / 266NRH with barrel housing and direct mount seal S26KN pulp and paper Gas threaded connections

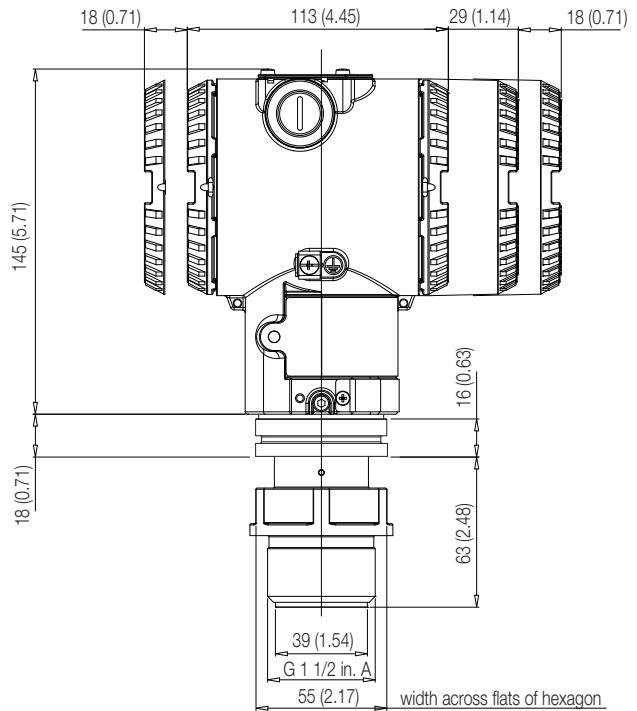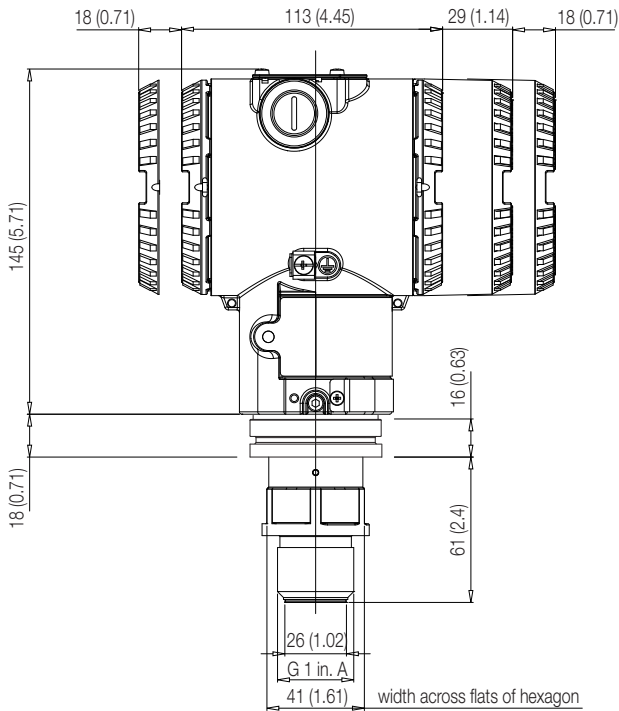


**266HRH / 266NRH with barrel housing and direct mount seal S26KN pulp and paper sealing with gasket**

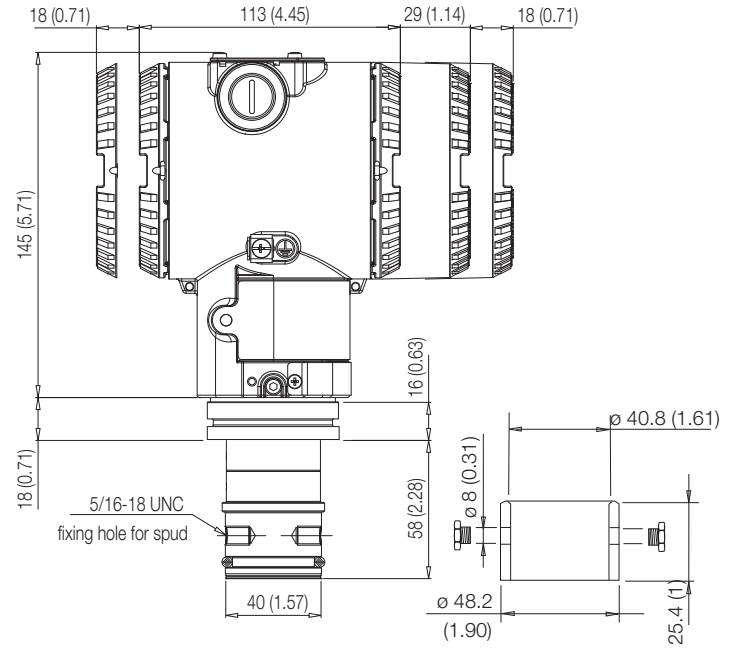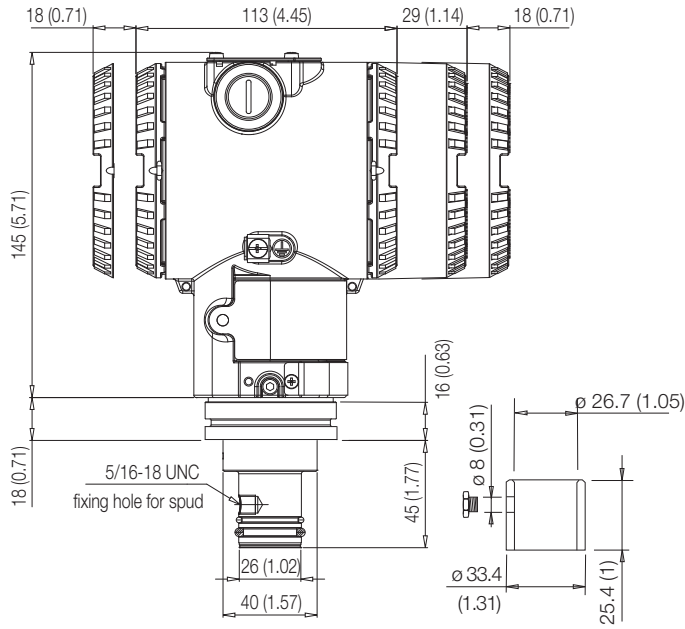

**266HRH / 266NRH with barrel housing and direct mount seal S26KN pulp and paper ball valve connection**

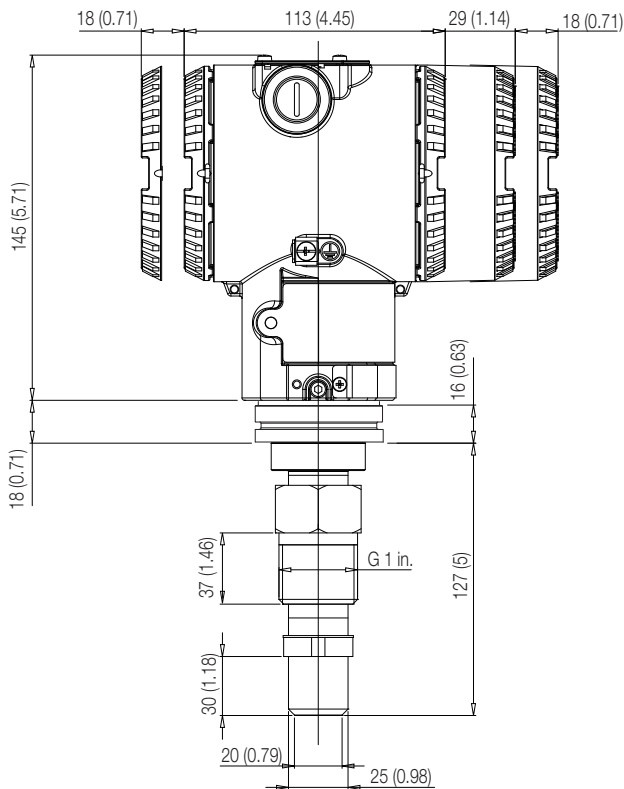

**266HRH / 266NRH with barrel housing and direct mount seal S26KN pulp and paper to threaded spud**

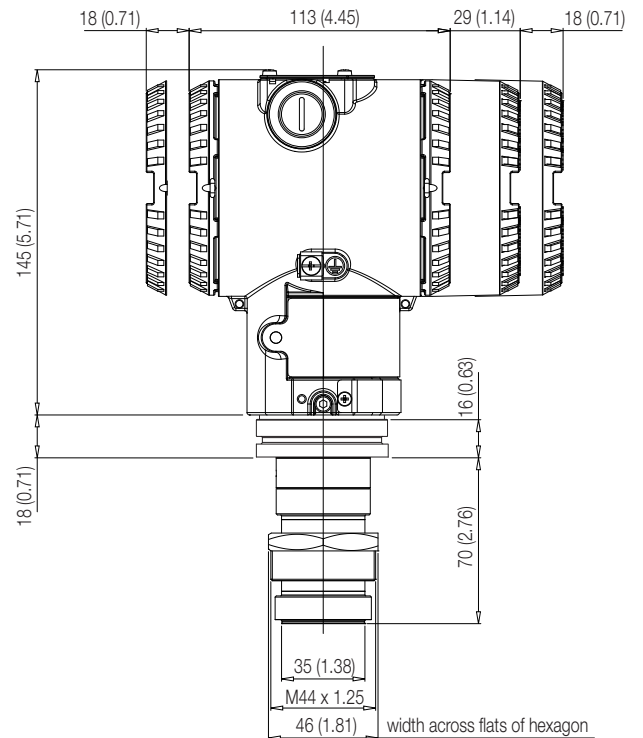

# Model 266DRH Differential


## Model 266HRH Gauge

## Model 266NRH Absolute


### S26WA, S26WE Model Wafer remote diaphragm seal

The wafer remote seal is designed to be clamped between two ASME or EN raised face flanges.


The diaphragm side of the seal faces the process flange and a blind back-up flange is used on the other side of the seal.

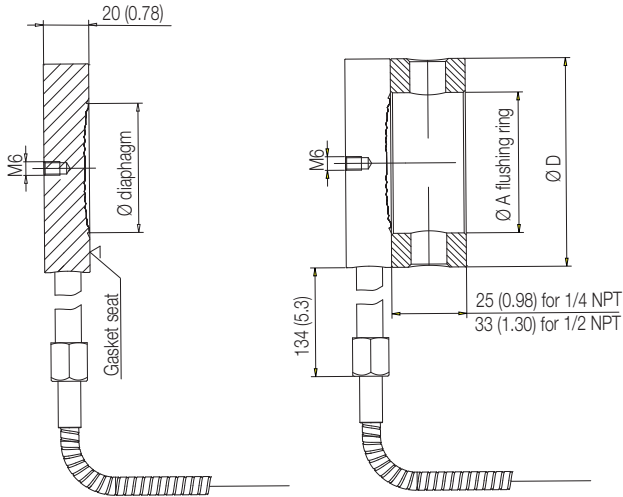

ASME and EN 1092-1 Form B1 smooth and serrated (flushing ring as option)

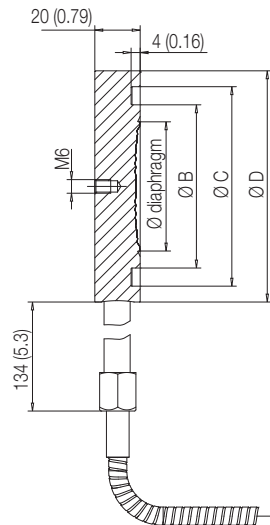

EN 1092-1 Form D

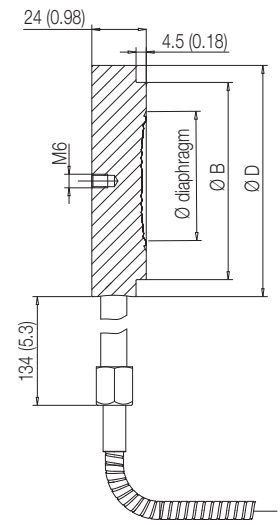


EN 1092-1 Form E


Size/Rating	Dimensions mm. (in.) for S26W					
	diaphragm (dia)		A flushing ring	B (dia)	C (dia)	D (dia)
	std. thickness	low thickness	internal dia			
1 1/2 in. ASME B16.5	47 (1.85)	47 (1.85)	52 (2.05)	NA	NA	73 (2.87)
2 in. ASME B16.5	60 (2.36)	58 (2.28)	62 (2.44)	NA	NA	92 (3.62)
3 in. ASME B16.5	89 (3.5)	75 (2.95)	92 (3.62)	NA	NA	127 (5)
DN 40 EN 1092-1 Form B1	47 (1.85)	47 (1.85)	52 (2.05)	NA	NA	88 (3.46)
DN 50 EN 1092-1 Form B1	60 (2.36)	58 (2.28)	62 (2.44)	NA	NA	102 (4.02)
DN 80 EN 1092-1 Form B1	89 (3.5)	75 (2.95)	92 (3.62)	NA	NA	138 (5.43)
DN 40 EN 1092-1 Form D	47 (1.85)	47 (1.85)	NA	60 (2.36)	76 (2.99)	88 (3.46)
DN 50 EN 1092-1 Form D	60 (2.36)	58 (2.28)	NA	72 (2.83)	88 (3.46)	102 (4.02)
DN 80 EN 1092-1 Form D	89 (3.5)	75 (2.95)	NA	105 (4.13)	121 (4.76)	138 (5.43)
DN 40 EN 1092-1 Form E	47 (1.85)	47 (1.85)	NA	75 (2.95)	NA	88 (3.46)
DN 50 EN 1092-1 Form E	60 (2.36)	58 (2.28)	NA	87 (3.42)	NA	102 (4.02)
DN 80 EN 1092-1 Form E	89 (3.5)	75 (2.95)	NA	120 (4.72)	NA	138 (5.43)

### S26CN Model Chemical Tee remote diaphragm seal

The chemical tee remote seal is designed to connect to a Wedge Flow Element or to any process fitting with appropriate mating condition. Chemical tee elements cannot be connected to a standard ASME pipe flange.

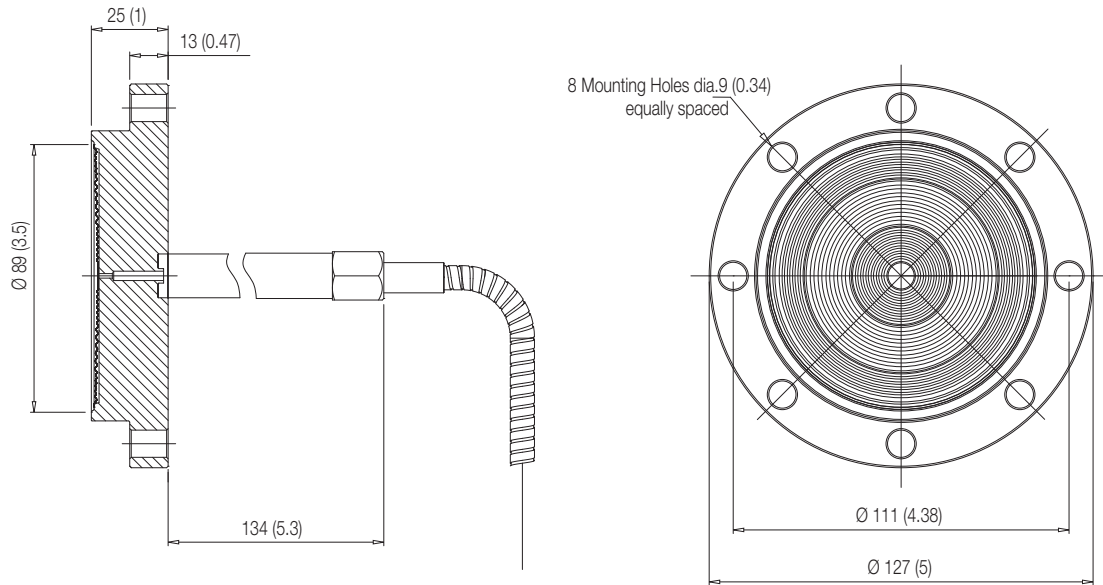

### S26PN Model urea service remote diaphragm seal

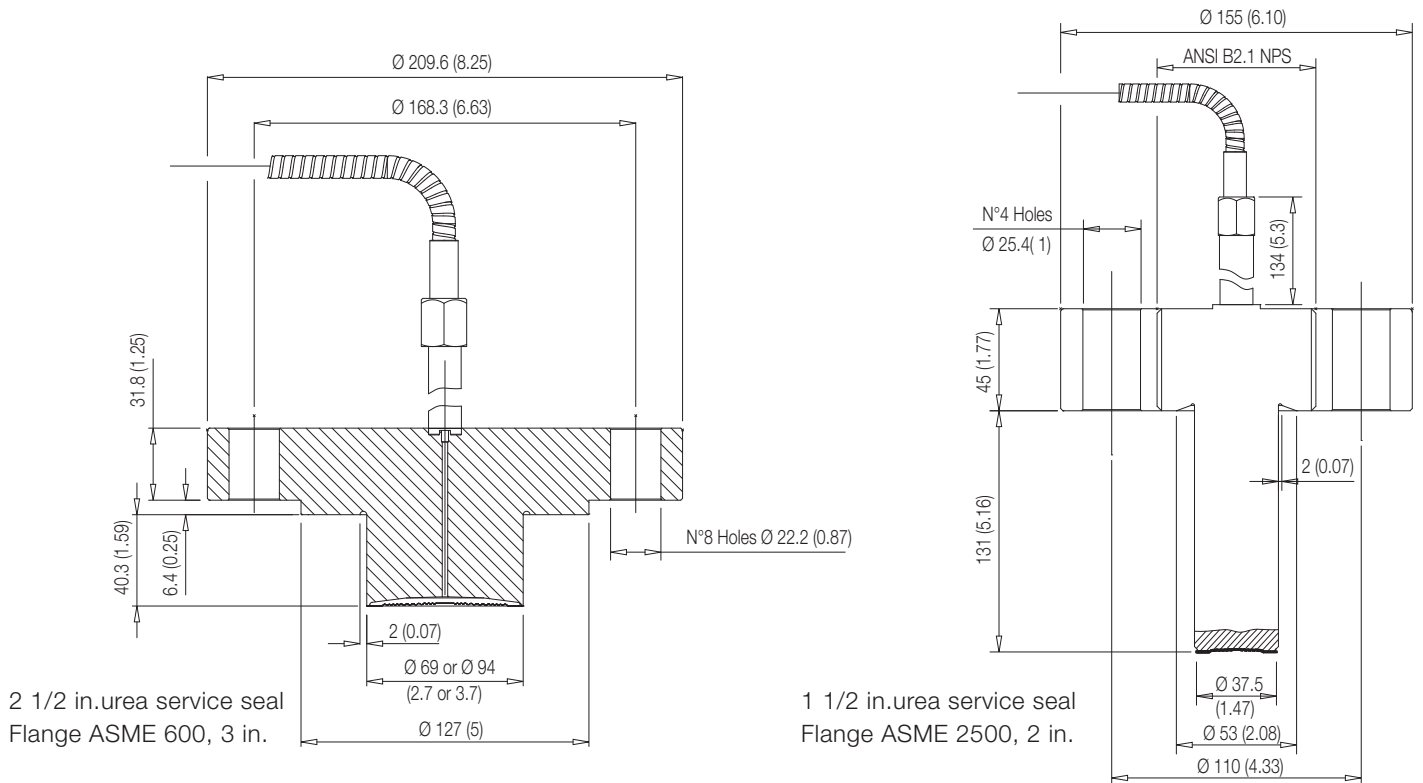

2 1/2 in. urea service seal  
Flange ASME 600, 3 in.

1 1/2 in. urea service seal  
Flange ASME 2500, 2 in.




# Model 266DRH Differential

# Model 266HRH Gauge


# Model 266NRH Absolute

## S26BN Model Button type remote diaphragm seal


These remote seals are designed to connect directly to a process pipe via the NPT threaded connection or to match pipe fitting with an interface suitable for the provided mating flange. The button seals, due to their design, are dedicated for measurement with medium/high calibrated span (2 MPa/20 bar/290 psi approx. or greater).

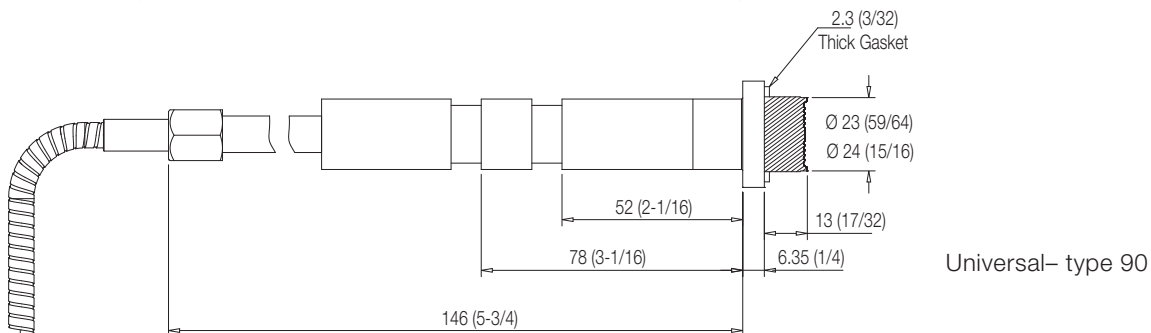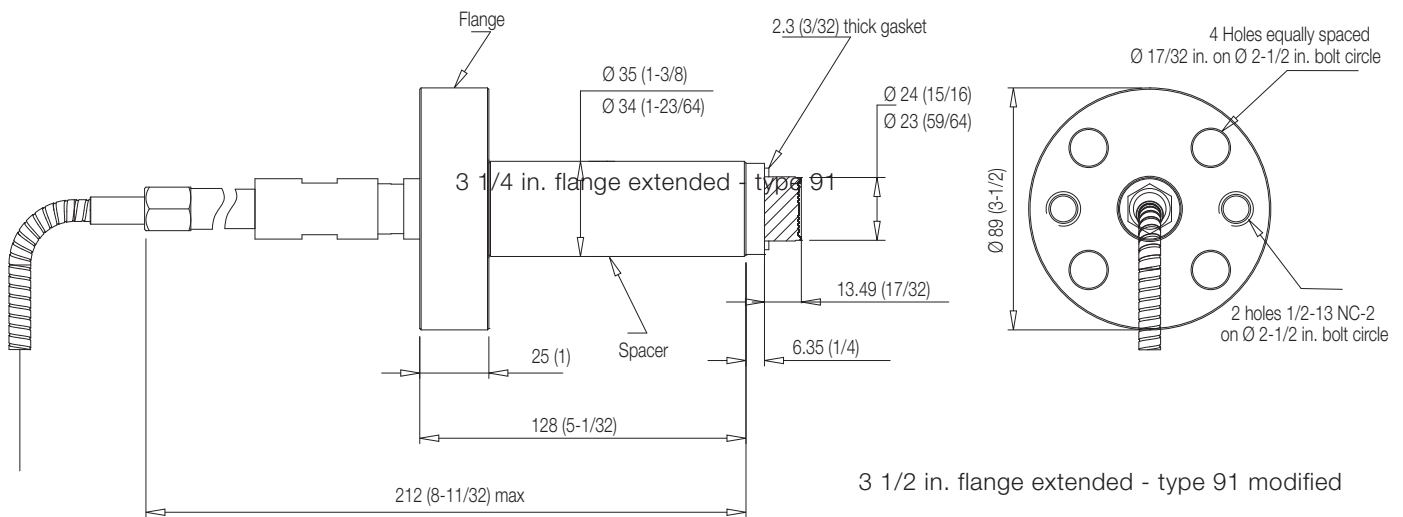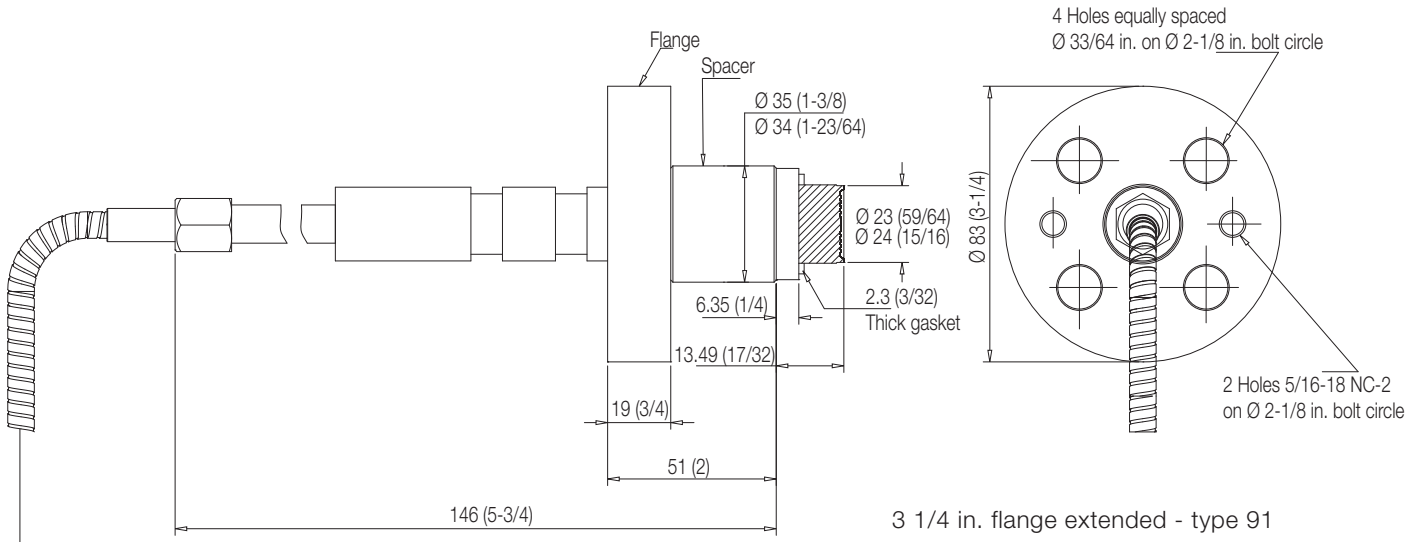



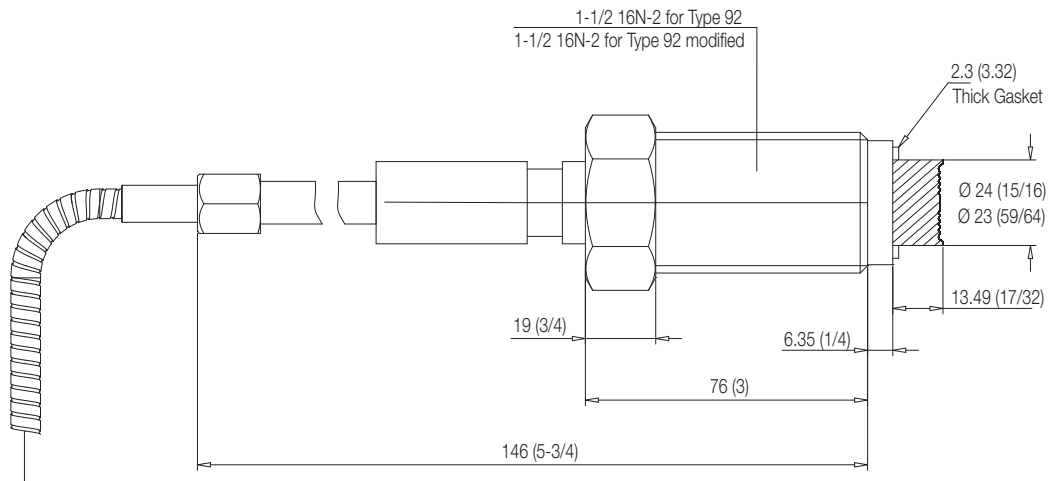

1 1/2 in. threaded union type 92/92 modified

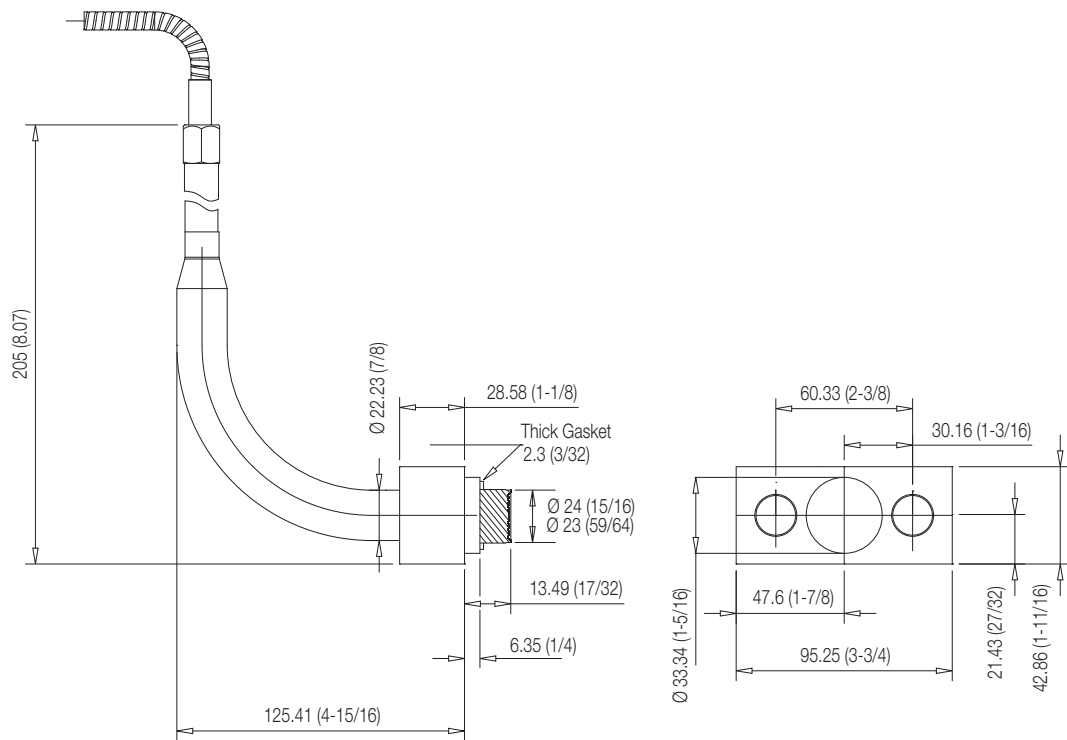

Bracket – type 89


# Model 266DRH Differential

## Model 266HRH Gauge


## Model 266NRH Absolute

### S26UN Model Union connection remote diaphragm seal


The union connection remote seal are used exclusively for pressure measurement with gauge pressure transmitter. The seal is available with an optional weld bushing, or with an optional chemical tee flange. The remote seal with a weld bushing, includes a bushing which provides the mating surface for the seal element. The union connection seal with a chemical tee flange, is designed to connect to any process fitting which accepts a chemical tee seal element (refer to Chemical Tee Seal for more information). The union seal connects to the chemical tee flange which serves as an adaptor to permit connection of the union seal to a chemical tee type fitting.

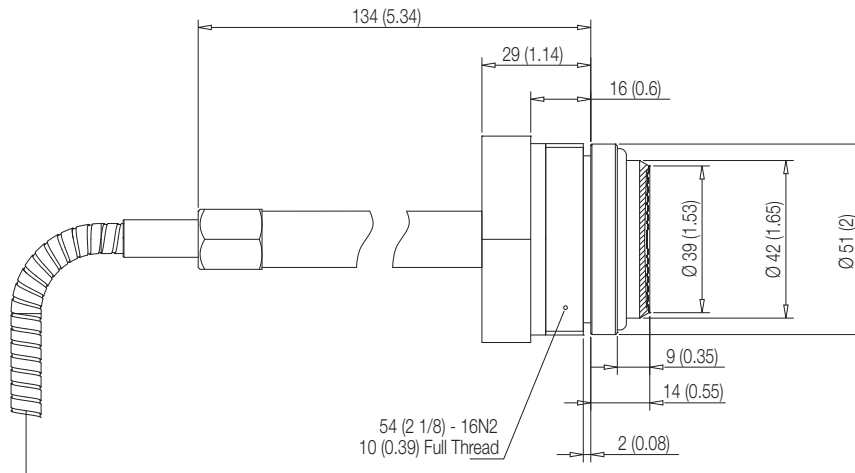

Union connection remote seal - basic version

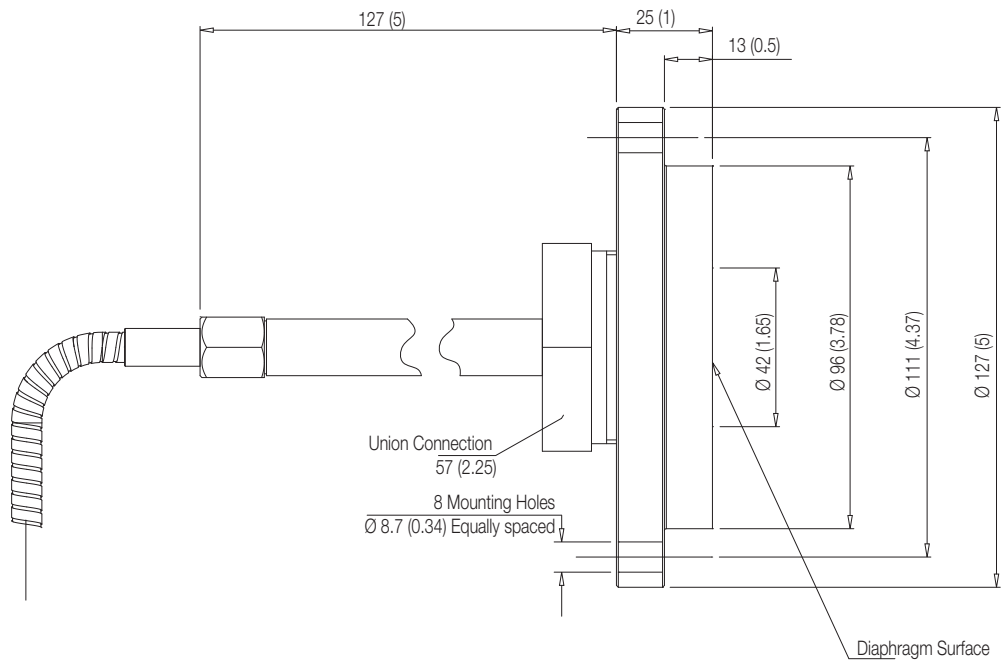

Union connection remote seal with Chemical Tee flange

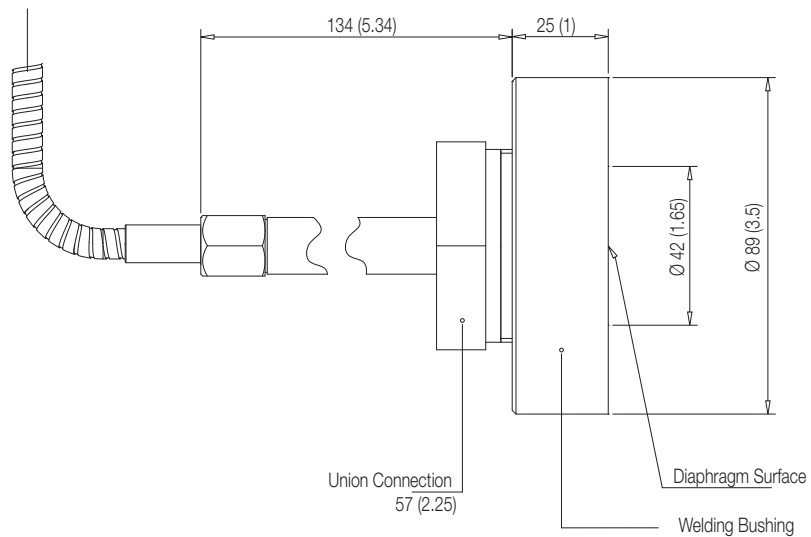


Union connection remote seal with weld bushing

# Model 266DRH Differential Model 266HRH Gauge Model 266NRH Absolute


## Electrical connections

### HART Version

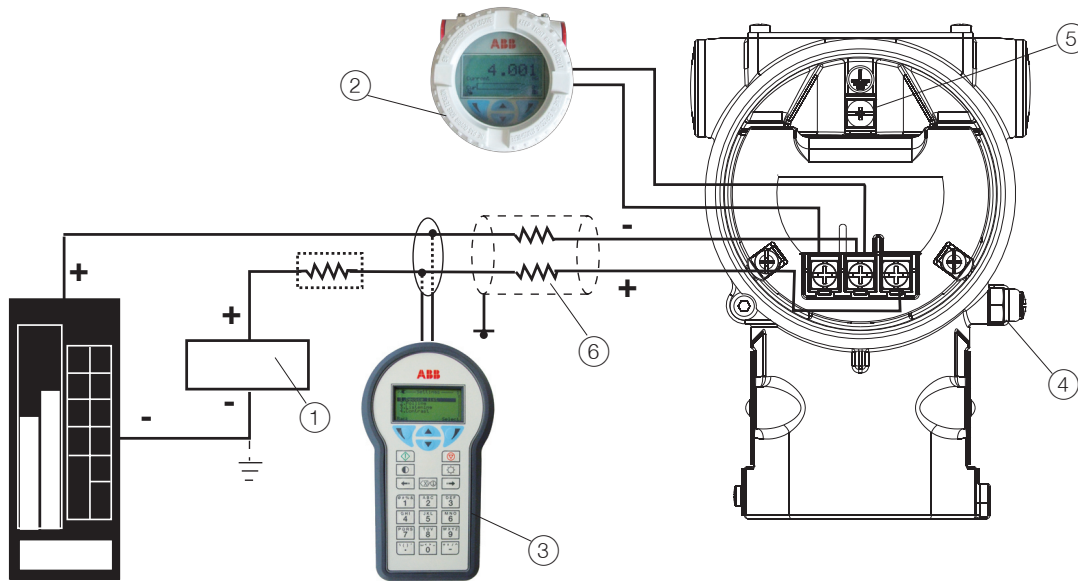


HART hand-held communicator may be connected at any wiring termination point in the loop, providing the minimum resistance is 250 ohm. If this is less than 250 ohm, additional resistance should be added to allow communications. Maximum voltage drop on external remote indicator is 0.7 V DC.

### FIELDBUS Versions

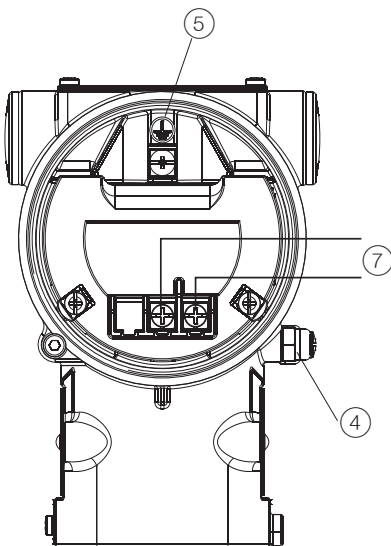

- ① Power source | ② Remote indicator | ③ Handheld communicator | ④ External ground termination point | ⑤ Internal ground termination point |
- ⑥ Line load | ⑦ Fieldbus line (polarity independent)

WirelessHART version

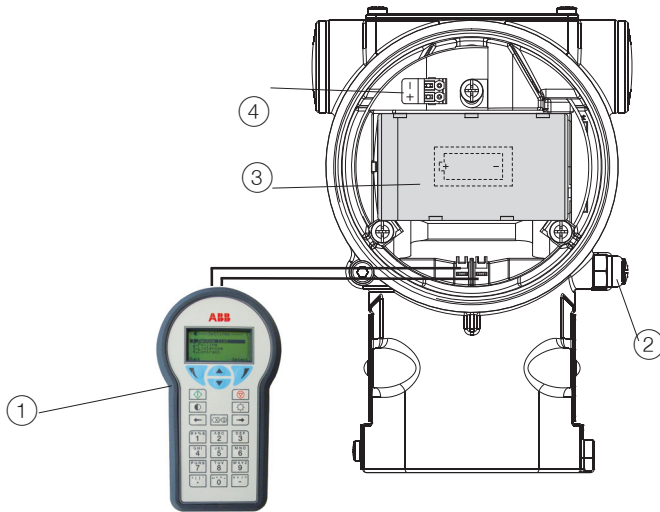

- ① HaNRHeld communicator | ② External ground termination point | ③ Battery | ④ Fast connection for harvesting unit

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

### Ordering information

#### BASIC ORDERING INFORMATION model 266DRH Differential Pressure Transmitter with remote seal

Select one character or set of characters from each category and specify complete catalog number.

Refer to additional ordering information and specify one or more codes for each transmitter if additional options are required.

BASE MODEL - 1 <sup>st</sup> to 6 <sup>th</sup> characters				2	6	D	R	H	X	X	X	X	X	X
Differential Pressure Transmitter with remote seal- BASE ACCURACY 0.06 %														
SENSOR - Span limits - 7 <sup>th</sup> character														
0.2 and 4 kPa	2 and 40 mbar	0.8 and 16 inH2O	(Note 11)						B					
0.8 and 16 kPa	8 and 160 mbar	3.2 and 64 inH2O	(Note 11)						E					
0.67 and 40 kPa	6.7 and 400 mbar	2.67 and 160 inH2O							F					
2.67 and 160 kPa	26.7 and 1600 mbar	10.7 and 642 inH2O							H					
10 and 600 kPa	0.1 and 6 bar	1.45 and 87 psi							M					
40 and 2400 kPa	0.4 and 24 bar	5.8 and 348 psi							P					
134 and 8000 kPa	1.34 and 80 bar	19.4 and 1160 psi							Q					
267 and 16000 kPa	2.67 and 160 bar	38.7 and 2320 psi	(Note 11)						S					
Application - 8th character														
Differential measurement at standard static pressure														S
Differential measurement at high static pressure (NOT AVAILABLE WITH DIRECT MOUNT SEALS)														H
Gauge measurement														(Note 3) P
Diaphragm material / Fill fluid (wetted parts) - 9 <sup>th</sup> character														
AISI 316 L ss	Silicone oil	(one seal only to be quoted)	(Notes 3, 11)						NACE					S
Hastelloy® C-276	Silicone oil	(one seal only to be quoted)	(Notes 3, 11, 19)						NACE					K
Monel 400®	Silicone oil	(one seal only to be quoted)	(Notes 3, 11, 19)						NACE					M
Tantalum	Silicone oil	(one seal only to be quoted)	(Notes 3, 11, 19)						NACE					T
AISI 316 L ss	Inert fluid - Galden	(one seal only to be quoted)	(Notes 1, 3, 11)						NACE					A
Hastelloy® C-276	Inert fluid - Galden	(one seal only to be quoted)	(Notes 1, 3, 11, 19)						NACE					F
Monel 400®	Inert fluid - Galden	(one seal only to be quoted)	(Notes 1, 3, 11, 19)						NACE					C
Tantalum	Inert fluid - Galden	(one seal only to be quoted)	(Notes 1, 3, 11, 19)						NACE					D
AISI 316 L ss	Inert fluid - Halocarbon	(one seal only to be quoted)	(Notes 1, 3, 11)						NACE					L
Hastelloy® C-276	Inert fluid - Halocarbon	(one seal only to be quoted)	(Notes 1, 3, 11, 19)						NACE					P
Monel 400®	Inert fluid - Halocarbon	(one seal only to be quoted)	(Notes 1, 3, 11, 19)						NACE					4
Tantalum	Inert fluid - Halocarbon	(one seal only to be quoted)	(Notes 1, 3, 11, 19)						NACE					5
AISI 316 L ss (not wetted)	Silicone oil	(two seals to be quoted)	(Notes 2, 19)						NACE					R
AISI 316 L ss (not wetted)	Inert fluid - Galden	(two seals to be quoted)	(Notes 1, 3, 11, 19)						NACE					2
AISI 316 L ss (not wetted)	Inert fluid - Halocarbon	(two seals to be quoted)	(Notes 1, 3, 19)						NACE					W

continued  
see next page

BASIC ORDERING INFORMATION model 266DRH Differential Pressure Transmitter				2	6	D	R	H	X	X	X	X
<b>Process flanges/adapters material and connection (wetted parts) - 10<sup>th</sup> character</b>												
AISI 316 L ss for two seals construction		(Notes 4, 19)	NACE							R		
AISI 316 L ss (Horizontal connection)	1/4 in. – 18 NPT-f direct	(Note 5)	NACE							A		
AISI 316 L ss (Horizontal connection)	1/2 in. – 14 NPT-f through adapter	(Notes 5, 19)	NACE							B		
Hastelloy® C-276 (Horizontal connection)	1/4 in. – 18 NPT-f direct	(Notes 5, 6, 19)	NACE							D		
Hastelloy® C-276 (Horizontal connection)	1/2 in. – 14 NPT-f through adapter	(Notes 5, 6, 19)	NACE							E		
Monel 400® (Horizontal connection)	1/4 in. – 18 NPT-f direct	(Notes 5, 6, 19)	NACE							G		
Monel 400® (Horizontal connection)	1/2 in. – 14 NPT-f through adapter	(Notes 5, 6, 19)	NACE							H		
<b>Bolts/Gasket (wetted parts) - 11<sup>th</sup> character</b>												
For standard static - AISI 316 ss (NACE) without gaskets for two seals construction – (MWP = 16 MPa)			(Notes 4, 19)	NACE						R		
For high static - Stainless steel (NACE) without gaskets for two seals construction – (MWP = 42 MPa)			(Notes 4, 19)	NACE						R		
AISI 316 ss without gaskets for two seals construction			(Notes 4, 19)							S		
AISI 316 ss	Viton®	(Note 5)								1		
AISI 316 ss	PTFE	(Notes 1, 5, 19)								2		
AISI 316 ss (NACE) – (MWP = 16 MPa)	Viton®	(Note 5)	NACE							3		
AISI 316 ss (NACE) – (MWP = 16 MPa)	PTFE	(Notes 1, 5, 19)	NACE							4		
<b>Housing material and electrical connection - 12<sup>th</sup> character</b>												
Aluminium alloy ( barrel version)	1/2 in. – 14 NPT						(Note 14)					A
Aluminium alloy ( barrel version)	M20 x 1.5 (CM 20)	(TO BE USED for WirelessHART)										B
AISI 316 L ss ( barrel version) (I2 or I3 required)	1/2 in. – 14 NPT						(Note 14)					S
AISI 316 L ss ( barrel version) (I2 or I3 required)	M20 x 1.5 (CM20)	(TO BE USED for WirelessHART)										T
Aluminium alloy (DIN version)	M20 x 1.5 (CM20)	(not Ex d or XP)					(Note 14)					J
<b>Output/Additional options - 13<sup>th</sup> character</b>												
HART and 4 to 20 mA - Standard functionality											7	
HART and 4 to 20 mA - Advanced functionality (includes option R1)											1	
PROFIBUS PA (includes option R1)											2	
FOUNDATION Fieldbus (includes option R1)											3	
HART and 4 to 20 mA Safety, certified to IEC 61508 (includes option R1)											8	
WirelessHART (includes option R1)											(Note 13)	9

NOTE - Option R1 represents the external pushbuttons

# Model 266DRH Differential

# Model 266HRH Gauge

# Model 266NRH Absolute

## ADDITIONAL ORDERING INFORMATION for model 266DRH

Add one or more 2-digit code(s) after the basic ordering information to select all required options

				XX	XX	XX
<b>Improved performance</b>						
Temperature errors optimization				DE		
<b>Drain/vent valve (material and position) (wetted parts)</b>						
AISI 316 L ss	on process axis	(Note 7)	NACE		V1	
AISI 316 L ss	on flange side top	(Note 7)	NACE		V2	
AISI 316 L ss	on flange side bottom	(Note 7)	NACE		V3	
Hastelloy® C-276	on process axis	(Note 8)	NACE		V4	
Hastelloy® C-276	on flange side top	(Note 8)	NACE		V5	
Hastelloy® C-276	on flange side bottom	(Note 8)	NACE		V6	
Monel 400®	on process axis	(Note 9)	NACE		V7	
Monel 400®	on flange side top	(Note 9)	NACE		V8	
Monel 400®	on flange side bottom	(Note 9)	NACE		V9	
<b>Hazardous area certifications</b>						
ATEX Intrinsic Safety Ex ia						E1
ATEX Explosion Proof Ex d				(Notes 10, 14)		E2
ATEX Intrinsic Safety Ex ic				(Notes 14)		E3
Combined ATEX, IECEx, FM Approvals (USA) and FM Approvals (Canada)				(Notes 10, 14)		EN
FM Approvals (Canada) approval				(Notes 10, 14)		E4
FM Approvals (USA) approval				(Notes 10, 14)		E6
FM Approvals (USA and Canada) Intrinsic Safety						EA
IECEX Intrinsic Safety Ex ia						E8
IECEX Explosion Proof Ex d				(Notes 10, 14)		E9
IECEX Intrinsic Safety Ex ic				(Notes 14)		ER
NEPSI Intrinsic Safety Ex ia				(Notes 14)		EY
NEPSI Explosion Proof Ex d				(Notes 10, 14)		EZ
NEPSI Type „N“				(Notes 14)		ES



ADDITIONAL ORDERING INFORMATION for model 266DRH			XX	XX	XX	XX
<b>Other hazardous area certifications (ONLY AS ALTERNATIVE TO BASIC CERTIFICATION CODE Ex)</b>						
Technical Regulations Customs Union (EAC) Intrinsic Safety Ex ia for Russia	(Notes 14)	W1				
Technical Regulations Customs Union (EAC) Explosion Proof Ex d for Russia	(Notes 10, 14)	W2				
Technical Regulations Customs Union (EAC) combined Ex ia and Ex d for Russia	(Notes 10, 14)	WC				
Technical Regulations Customs Union (EAC) Intrinsic Safety Ex ia for Kazakhstan	(Notes 14)	W3				
Technical Regulations Customs Union (EAC) Explosion Proof Ex d for Kazakhstan	(Notes 10, 14)	W4				
Technical Regulations Customs Union (EAC) combined Ex ia and Ex d for Kazakhstan	(Notes 10, 14)	WD				
Inmetro (Brazil) Ex ia	(Notes 14)	W5				
Inmetro (Brazil) Ex d	(Notes 10, 14)	W6				
Inmetro (Brazil) Ex nL	(Notes 14)	W7				
Combined Inmetro (Brazil) - Intrinsic Safety, Explosion Proof and Type „N“	(Notes 10, 14)	W8				
Technical Regulations Customs Union (EAC) Intrinsic Safety Ex ia for Belarus	(Notes 14)	WF				
Technical Regulations Customs Union (EAC) Explosion Proof Ex d for Belarus	(Notes 10, 14)	WG				
Technical Regulations Customs Union (EAC) combined Ex ia and Ex d for Belarus	(Notes 10, 14)	WH				
Kosha (Korea) Intrinsic Safety Ex ia IIC T6, IP67	(Notes 12, 14)	WM				
Kosha (Korea) Explosion Proof Ex d IIC T6, IP67	(Notes 10, 12, 14)	WN				
Combined Kosha (Korea) - Intrinsic Safety and Explosion Proof	(Notes 10, 12, 14)	WP				
<b>Integral LCD</b>						
Digital LCD integral display	(Note 12)	L1				
TTG (Through-The-Glass) digital LCD controlled display	(Note 12)	L5				
Integrated digital LCD display (ONLY SELECTABLE WITH OUTPUT CODE 7)	(Note 17)	LS				
<b>External non intrusive Z, S and WP pushbuttons</b>						
Transmitters with external pushbutton (ONLY SELECTABLE WITH OUTPUT CODE 7)						R1
<b>Mounting bracket (shape and material)</b>						
For pipe/wall mounting - Carbon steel	(Not suitable for AISI housing)					B1
For pipe/wall mounting - AISI 316 L ss						B2
Flat type for box - AISI 316 ss						B5
<b>Surge</b>						
Surge/Transient Protector					(Note 14)	S2

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

ADDITIONAL ORDERING INFORMATION for model 266DRH	XX	XX	XX	XX	XX
<b>Operating manual (multiple selection allowed)</b>					
German (FOR HART, WirelessHART and PROFIBUS VERSIONS)	M1				
Italian (ONLY FOR HART VERSIONS)	M2				
Spanish (FOR HART, WirelessHART and FOUNDATION Fieldbus VERSIONS)	M3				
French (ONLY FOR HART VERSIONS)	M4				
English	M5				
Portuguese (ONLY FOR HART VERSIONS)	MA				
Russian (ONLY FOR HART VERSIONS)	MB				
<b>Plates language</b>					
German		T1			
Italian		T2			
Spanish		T3			
French		T4			
<b>Additional tag plate</b>					
Supplemental wired-on stainless steel plate			I1		
Tag and certification stainless steel plates and laser printing of tag			I2		
Tag, certification and supplemental wired-on stainless steel plates and laser printing of tag			I3		
<b>Configuration</b>					
Standard – Pressure = inH2O/ psi at 68 °F; Temperature = deg. F				N2	
Standard – Pressure = inH2O/ psi at 39.2 °F; Temperature = deg. F				N3	
Standard – Pressure = inH2O/ psi at 20 °C; Temperature = deg. C				N4	
Standard – Pressure = inH2O/ psi at 4 °C; Temperature = deg. C				N5	
Custom				N6	
<b>Certificates (multiple selection allowed)</b>					
Inspection certificate EN 10204–3.1 of calibration (9-point)					C1
Inspection certificate EN 10204–3.1 of helium leakage test of the sensor module					C4
Inspection certificate EN 10204–3.1 of the pressure test					C5
Certificate of compliance with the order EN 10204–2.1 of instrument design					C6
PMI test of wetted parts					CT

ADDITIONAL ORDERING INFORMATION FOR MODEL 266DRH		XX	XX	XX	XX	XX
<b>Approvals</b>						
Metrologic Pattern for Russia	(NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICATION)	Y1				
Metrologic Pattern for Kazakhstan	(NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICATION)	Y2				
Metrologic Pattern for Belarus	(NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICATION)	Y4				
Chinese pattern	(NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICATION)	Y5				
DNV GL approval	(Notes 12, 14)		YA			
Conformity to NAMUR NE 021 (2004)	(NOT APPLICABLE WITH SURGE PROTECTOR CODE "S2") (Notes 12, 14, 16, 18)		YE			
<b>Material traceability</b>						
Inspection certificate EN 10204–3.1 of process wetted parts (not for gaskets)						H3
Test report EN 10204–2.2 of pressure bearing and process wetted parts (not for gaskets)						H4
<b>National radio frequency licence</b>						
Basic countries (Europe, USA, Canada)	(Note 15)					FB
Argentina	(Note 15)					FA
United Arab Emirates	(Note 15)					FG
<b>Electrical connection plug</b>						
One certified stainless steel plug (supplied loose with thread according to housing entries)						Z1

Note 1: Suitable for oxygen service

Note 2: Not wetted – Hastelloy C276 on AISI seat for sensor code B

Note 3: Not available with sensor code B

Note 4: Not available with low side diaphragm code S, K, M, T, A, F, C, D, L, P, 4, 5

Note 5: Not available with low side diaphragm code R, 2, W

Note 6: Not available with diaphragm material/fill fluid code S, A, L

Note 7: Not available with Process flanges/adapters code D, E, G, H, R

Note 8: Not available with Process flanges/adapters code A, B, G, H, R

Note 9: Not available with Process flanges/adapters code A, B, D, E, R

Note 10: Not available with Housing code J

Note 11: Not available with high static pressure code H

Note 12: Not available with Output code 7

Note 13: Not available with Housing code A, S, J

Note 14: Not available with Output code 9

Note 15: Not available with Output code 1, 2, 3, 7, 8

Note 16: Not available with Output code 2, 3

Note 17: Not available with Hazardous area certification code WM, WN, WP

Note 18: Not available with Hazardous area certification code EN, E4, E6, EA, EY, EZ, ES, W1, W2, WC, W3, W4, WD, W5, W6, W7, W8, WF, WG, WH, WM, WN, WP

Note 19: Not available with Application code P (gauge measurement)

### Standard delivery items (can be differently specified by additional ordering code)

- Adapter supplied loose
- Plug on axis of horizontal connection flange
- General purpose (no electrical certification)
- No display, no mounting bracket, no surge protection
- Multilanguage short-form operating instruction manual and labels in english (metal nameplate; self-adhesive certification and tag)
- Configuration with kPa and deg. C units
- No test, inspection or material traceability certificates

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

### BASIC ORDERING INFORMATION model 266HRH Gauge Pressure Transmitter with remote seal

Select one character or set of characters from each category and specify complete catalog number.

Refer to additional ordering information and specify one or more codes for each transmitter if additional options are required.

BASE MODEL - 1 <sup>st</sup> to 6 <sup>th</sup> characters			2 6 6 H R H	X	X	X	X	X
Gauge Pressure Transmitter with remote seal – BASE ACCURACY 0.06 %								
SENSOR - Span limits - 7 <sup>th</sup> character								see next page
0.67 and 40 kPa	6.7 and 400 mbar	2.67 and 160 inH2O		F				
2.67 and 160 kPa	26.7 and 1600 mbar	10.7 and 642 inH2O		H				
10 and 600 kPa	0.1 and 6 bar	1.45 and 87 psi		M				
40 and 2400 kPa	0.4 and 24 bar	5.8 and 348 psi		P				
134 and 8000 kPa	1.34 and 80 bar	19.4 and 1160 psi		Q				
267 and 16000 kPa	2.67 and 160 bar	38.7 and 2320 psi		S				
1400 and 70000 kPa	14 and 700 bar	203 and 10150 psi		W				
10500 and 105000 kPa	105 and 1050 bar	1522 and 15225 psi		Z				
Diaphragm material / Fill fluid - 8 <sup>th</sup> character								
AISI 316 L ss		Silicone oil	(Note 5)	NACE	R			
AISI 316 L ss		Inert fluid - Galden	(Notes 1, 2, 5)	NACE	2			
AISI 316 L ss		Inert fluid - Halocarbon	(Notes 1, 2, 5)	NACE	W			
Inconel® 718		No filling	(Notes 2, 6)		U			
Process connection - 9 <sup>th</sup> character								
Remote or direct mount seal		(one seal to be quoted separately)					R	
Housing material and electrical connection - 10 <sup>th</sup> character								
Aluminium alloy (barrel version)		1/2 in. – 14 NPT			(Note 8)			A
Aluminium alloy (barrel version)		M20 x 1.5 (CM 20)	(TO BE USED for WirelessHART)					B
AISI 316 L ss (barrel version) (I2 or I3 required)		1/2 in. – 14 NPT			(Note 8)			S
AISI 316 L ss (barrel version) (I2 or I3 required)		M20 x 1.5 (CM20)	(TO BE USED for WirelessHART)					T
Aluminium alloy (DIN version)		M20 x 1.5 (CM20)	(not Ex d or XP)		(Note 8)			J

BASIC ORDERING INFORMATION model 266HRH Differential Pressure Transmitter	2 6 6 H R H X X X X	X
<b>Output/Additional options</b> - 11 <sup>th</sup> character		
HART and 4 to 20 mA - Standard functionality	(Notes 2, 5)	7
HART and 4 to 20 mA - Advanced functionality (includes option R1)		1
PROFIBUS PA (includes option R1)		2
FOUNDATION Fieldbus (includes option R1)		3
HART and 4 to 20 mA Safety, certified to IEC 61508 (includes option R1)		8
WirelessHART (includes option R1)	(Notes 2, 5, 7)	9

NOTE - Option R1 represents the external pushbuttons

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

### ADDITIONAL ORDERING INFORMATION for model 266HRH

Add one or more 2-digit code(s) after the basic ordering information to select all required options

		XX
<b>Hazardous area certifications</b>		
ATEX Intrinsic Safety Ex ia		E1
ATEX Explosion Proof Ex d	(Notes, 3, 8)	E2
ATEX Intrinsic Safety Ex ic	(Notes, 8)	E3
Combined ATEX, IECEx, FM Approvals (USA) and FM Approvals (Canada)	(Notes, 3, 8)	EN
FM Approvals (Canada) approval	(Notes, 3, 8)	E4
FM Approvals (USA) approval	(Notes, 3, 8)	E6
FM Approvals (USA and Canada) Intrinsic Safety		EA
IECEx Intrinsic Safety Ex ia		E8
IECEx Explosion Proof Ex d	(Notes, 3, 8)	E9
IECEx Intrinsic Safety Ex ic	(Notes, 8)	ER
NEPSI Intrinsic Safety Ex ia	(Notes, 8)	EY
NEPSI Explosion Proof Ex d	(Notes, 3, 8)	EZ
NEPSI Type „N“	(Notes, 8)	ES
<b>Other hazardous area certifications (ONLY AS ALTERNATIVE TO BASIC CERTIFICATION CODE Ex)</b>		
Technical Regulations Customs Union (EAC) Intrinsic Safety Ex ia for Russia	(Notes, 8)	W1
Technical Regulations Customs Union (EAC) Explosion Proof Ex d for Russia	(Notes, 3, 8)	W2
Technical Regulations Customs Union (EAC) combined Ex ia and Ex d for Russia	(Notes, 3, 8)	WC
Technical Regulations Customs Union (EAC) Intrinsic Safety Ex ia for Kazakhstan	(Notes, 8)	W3
Technical Regulations Customs Union (EAC) Explosion Proof Ex d for Kazakhstan	(Notes, 3, 8)	W4
Technical Regulations Customs Union (EAC) combined Ex ia and Ex d for Kazakhstan	(Notes, 3, 8)	WD
Inmetro (Brazil) Ex ia	(Notes, 8)	W5
Inmetro (Brazil) Ex d	(Notes, 3, 8)	W6
Inmetro (Brazil) Ex nL	(Notes, 8)	W7
Combined Inmetro (Brazil) - Intrinsic Safety, Explosion Proof and Type „N“	(Notes, 3, 8)	W8
Technical Regulations Customs Union (EAC) Intrinsic Safety Ex ia for Belarus	(Notes, 8)	WF
Technical Regulations Customs Union (EAC) Explosion Proof Ex d for Belarus	(Notes, 3, 8)	WG
Technical Regulations Customs Union (EAC) combined Ex ia and Ex d for Belarus	(Notes, 3, 8)	WH
Kosha (Korea) Intrinsic Safety Ex ia IIC T6, IP67	(Notes 2, 4, 8)	WM
Kosha (Korea) Explosion Proof Ex d IIC T6, IP67	(Notes 2, 3, 4, 8)	WN
Combined Kosha (Korea) - Intrinsic Safety and Explosion Proof	(Notes 2, 3, 4, 8)	WP

ADDITIONAL ORDERING INFORMATION for model 266HRH		XX	XX	XX	XX	XX	XX	XX
<b>Integral LCD</b>								
Digital LCD integral display	(Note 4)	L1						
TTG (Through-The-Glass) digital LCD controlled display	(Note 4)	L5						
Integrated digital LCD display (ONLY SELECTABLE WITH OUTPUT CODE 7)	(Note 11)	LS						
<b>External non intrusive Z, S and WP pushbuttons</b>								
Transmitters with external pushbutton (ONLY SELECTABLE WITH OUTPUT CODE 7)			R1					
<b>Mounting bracket (shape and material)</b>								
For pipe/wall mounting - Carbon steel	(Not suitable for AISI housing)					B6		
For pipe/wall mounting - AISI 316 L ss						B7		
<b>Surge</b>								
Surge/Transient Protector	(Note 8)					S2		
<b>Operating manual (multiple selection allowed)</b>								
German (FOR HART, WirelessHART and PROFIBUS VERSIONS)							M1	
Italian (ONLY FOR HART VERSIONS)							M2	
Spanish (FOR HART, WirelessHART and FOUNDATION Fieldbus VERSIONS)							M3	
French (ONLY FOR HART VERSIONS)							M4	
English							M5	
Portuguese (ONLY FOR HART VERSIONS)							MA	
Russian (ONLY FOR HART VERSIONS)							MB	
<b>Plates language</b>								
German								T1
Italian								T2
Spanish								T3
French								T4
<b>Additional tag plate</b>								
Supplemental wired-on stainless steel plate								I1
Tag and certification stainless steel plates and laser printing of tag								I2
Tag, certification and supplemental wired-on stainless steel plates and laser printing of tag								I3
<b>Configuration</b>								
Standard – Pressure = inH2O/ psi at 68 °F; Temperature = deg. F								N2
Standard – Pressure = inH2O/ psi at 39.2 °F; Temperature = deg. F								N3
Standard – Pressure = inH2O/ psi at 20 °C; Temperature = deg. C								N4
Standard – Pressure = inH2O/ psi at 4 °C; Temperature = deg. C								N5
Custom								N6

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

ADDITIONAL ORDERING INFORMATION FOR MODEL 266HRH		XX	XX	XX	XX	XX	XX
<b>Approvals</b>							
<b>Certificates (multiple selection allowed)</b>							
Inspection certificate EN 10204–3.1 of calibration (9-point)		C1					
Inspection certificate EN 10204–3.1 of the pressure test		C5					
Certificate of compliance with the order EN 10204–2.1 of instrument design		C6					
PMI test of wetted parts		CT					
Metrologic Pattern for Russia	(NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICATION)		Y1				
Metrologic Pattern for Kazakhstan	(NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICATION)		Y2				
Metrologic Pattern for Belarus	(NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICATION)		Y4				
Chinese pattern	(NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICATION)		Y5				
DNV GL approval				(Notes 2, 4, 5, 8)		YA	
Conformity to NAMUR NE 021 (2004) (NOT APPLICABLE WITH SURGE PROTECTOR CODE "S2")				(Notes 2, 4, 5, 8, 10, 12)		YE	
<b>Material traceability</b>							
Inspection certificate EN 10204–3.1 of process wetted parts (not for gaskets)							H3
Test report EN 10204–2.2 of pressure bearing and process wetted parts (not for gaskets)							H4
<b>National radio frequency licence</b>							
Basic countries (Europe, USA, Canada)		(Note 9)					FB
Argentina		(Note 9)					FA
United Arab Emirates		(Note 9)					FG
<b>Electrical connection plug</b>							
One certified stainless steel plug (supplied loose with thread according to housing entries)							Z1

Note 1: Suitable for oxygen service

Note 2: Not available with Sensor code W

Note 3: Not available with Housing code J

Note 4: Not available with Output code 7

Note 5: Not available with Sensor code Z

Note 6: Not available with Sensor code F to S

Note 7: Not available with Housing code A, S, J

Note 8: Not available with Output code 9

Note 9: Not available with Output code 1, 2, 3, 7, 8

Note 10: Not available with Output code 2, 3

Note 11: Not available with Hazardous area certification code WM, WN, WP

Note 12: Not available with Hazardous area certification code EN, E4, E6, EA, EY, EZ, ES, W1, W2, WC, W3, W4, WD, W5, W6, W7, W8, WF, WG, WH, WM, WN, WP

### Standard delivery items (can be differently specified by additional ordering code)

- General purpose (no electrical certification)
- No display, no mounting bracket, no surge protection
- Multilanguage short-form operating instruction manual and labels in english (metal nameplate; self-adhesive certification and tag)
- Configuration with kPa and deg. C units
- No test, inspection or material traceability certificates



**BASIC ORDERING INFORMATION model 266NRH Absolute Pressure Transmitter with remote seal**

Select one character or set of characters from each category and specify complete catalog number.

Refer to additional ordering information and specify one or more codes for each transmitter if additional options are required.

<b>BASE MODEL</b> - 1 <sup>st</sup> to 6 <sup>th</sup> characters				<b>2 6 6 N R H</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
Absolute Pressure Transmitter with remote seal – BASE ACCURACY 0.10 %									
<b>SENSOR - Span limits</b> - 7 <sup>th</sup> character									
0.67 and 40 kPa	6.7 and 400 mbar	5 and 300 mmHg		F					
2.67 and 160 kPa	26.7 and 1600 mbar	10.7 and 642 inH2O		H					
10 and 600 kPa	0.1 and 6 bar	1.45 and 87 psi		M					
40 and 2400 kPa	0.4 and 24 bar	5.8 and 348 psi		P					
134 and 8000 kPa	1.34 and 80 bar	19.4 and 1160 psi		Q					
267 and 16000 kPa	2.67 and 160 bar	38.7 and 2320 psi		S					
<b>Diaphragm material / Fill fluid</b> - 8 <sup>th</sup> character									
AISI 316 L ss		Silicone oil		NACE		R			
AISI 316 L ss		Inert fluid - Galden	(Note 1)	NACE		2			
AISI 316 L ss		Inert fluid - Halocarbon	(Note 1)	NACE		W			
<b>Process connection</b> - 9 <sup>th</sup> character									
Remote or direct mount seal				(one seal to be quoted separately)			R		
<b>Housing material and electrical connection</b> - 10 <sup>th</sup> character									
Aluminium alloy (barrel version)		1/2 in. – 14 NPT		(Note 5)				A	
Aluminium alloy (barrel version)		M20 x 1.5 (CM 20)	(TO BE USED for WirelessHART)					B	
AISI 316 L ss (barrel version) (I2 or I3 required)		1/2 in. – 14 NPT		(Note 5)				S	
AISI 316 L ss (barrel version) (I2 or I3 required)		M20 x 1.5 (CM20)	(TO BE USED for WirelessHART)					T	
Aluminium alloy (DIN version)		M20 x 1.5 (CM20)	(not Ex d or XP)	(Note 5)				J	
<b>Output/Additional options</b> - 11 <sup>th</sup> character									
HART and 4 to 20 mA - Standard functionality									7
HART and 4 to 20 mA - Advanced functionality (includes option R1)									1
PROFIBUS PA (includes option R1)									2
FOUNDATION Fieldbus (includes option R1)									3
HART and 4 to 20 mA Safety, certified to IEC 61508 (includes option R1)									8
WirelessHART (includes option R1)						(Note 4)			9

NOTE - Option R1 represents the external pushbuttons

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

### ADDITIONAL ORDERING INFORMATION for model 266NRH

Add one or more 2-digit code(s) after the basic ordering information to select all required options

			XX
<b>Hazardous area certifications</b>			
ATEX Intrinsic Safety Ex ia			E1
ATEX Explosion Proof Ex d	(Notes, 2, 5)		E2
ATEX Intrinsic Safety Ex ic	(Notes, 5)		E3
Combined ATEX, IECEx, FM Approvals (USA) and FM Approvals (Canada)	(Notes, 2, 5)		EN
FM Approvals (Canada) approval	(Notes, 2, 5)		E4
FM Approvals (USA) approval	(Notes, 2, 5)		E6
FM Approvals (USA and Canada) Intrinsic Safety			EA
IECEx Intrinsic Safety Ex ia			E8
IECEx Explosion Proof Ex d	(Notes, 2, 5)		E9
IECEx Intrinsic Safety Ex ic	(Notes, 5)		ER
NEPSI Intrinsic Safety Ex ia	(Notes, 5)		EY
NEPSI Explosion Proof Ex d	(Notes, 2, 5)		EZ
NEPSI Type „N“	(Notes, 5)		ES
<b>Other hazardous area certifications (ONLY AS ALTERNATIVE TO BASIC CERTIFICATION CODE Ex)</b>			
Technical Regulations Customs Union (EAC) Intrinsic Safety Ex ia for Russia	(Notes, 5)		W1
Technical Regulations Customs Union (EAC) Explosion Proof Ex d for Russia	(Notes, 2, 5)		W2
Technical Regulations Customs Union (EAC) combined Ex ia and Ex d for Russia	(Notes, 2, 5)		WC
Technical Regulations Customs Union (EAC) Intrinsic Safety Ex ia for Kazakhstan	(Notes, 5)		W3
Technical Regulations Customs Union (EAC) Explosion Proof Ex d for Kazakhstan	(Notes, 2, 5)		W4
Technical Regulations Customs Union (EAC) combined Ex ia and Ex d for Kazakhstan	(Notes, 2, 5)		WD
Inmetro (Brazil) Ex ia	(Notes, 5)		W5
Inmetro (Brazil) Ex d	(Notes, 2, 5)		W6
Inmetro (Brazil) Ex nL	(Notes, 5)		W7
Combined Inmetro (Brazil) - Intrinsic Safety, Explosion Proof and Type „N“	(Notes, 2, 5)		W8
Technical Regulations Customs Union (EAC) Intrinsic Safety Ex ia for Belarus	(Notes, 5)		WF
Technical Regulations Customs Union (EAC) Explosion Proof Ex d for Belarus	(Notes, 2, 5)		WG
Technical Regulations Customs Union (EAC) combined Ex ia and Ex d for Belarus	(Notes, 2, 5)		WH
Kosha (Korea) Intrinsic Safety Ex ia IIC T6, IP67	(Notes, 3, 5)		WM
Kosha (Korea) Explosion Proof Ex d IIC T6, IP67	(Notes, 2, 3, 5)		WN
Combined Kosha (Korea) - Intrinsic Safety and Explosion Proof	(Notes, 2, 3, 5)		WP

ADDITIONAL ORDERING INFORMATION for model 266NRH		XX	XX	XX	XX	XX	XX	XX	XX
<b>Integral LCD</b>									
Digital LCD integral display	(Note 3)	L1							
TTG (Through-The-Glass) digital LCD controlled display	(Note 3)	L5							
Integrated digital LCD display (ONLY SELECTABLE WITH OUTPUT CODE 7)	(Note 8)	LS							
<b>External non intrusive Z, S and WP pushbuttons</b>									
Transmitters with external pushbutton (ONLY SELECTABLE WITH OUTPUT CODE 7)			R1						
<b>Mounting bracket (shape and material)</b>									
For pipe/wall mounting - Carbon steel	(Not suitable for AISI housing)					B6			
For pipe/wall mounting - AISI 316 L ss						B7			
<b>Surge</b>									
Surge/Transient Protector	(Note 5)					S2			
<b>Operating manual (multiple selection allowed)</b>									
German (FOR HART, WirelessHART and PROFIBUS VERSIONS)							M1		
Italian (ONLY FOR HART VERSIONS)							M2		
Spanish (FOR HART, WirelessHART and FOUNDATION Fieldbus VERSIONS)							M3		
French (ONLY FOR HART VERSIONS)							M4		
English							M5		
Portuguese (ONLY FOR HART VERSIONS)							MA		
Russian (ONLY FOR HART VERSIONS)							MB		
<b>Plates language</b>									
German								T1	
Italian								T2	
Spanish								T3	
French								T4	
<b>Additional tag plate</b>									
Supplemental wired-on stainless steel plate									I1
Tag and certification stainless steel plates and laser printing of tag									I2
Tag, certification and supplemental wired-on stainless steel plates and laser printing of tag									I3
<b>Configuration</b>									
Standard – Pressure = inH2O/ psi at 68 °F; Temperature = deg. F									N2
Standard – Pressure = inH2O/ psi at 39.2 °F; Temperature = deg. F									N3
Standard – Pressure = inH2O/ psi at 20 °C; Temperature = deg. C									N4
Standard – Pressure = inH2O/ psi at 4 °C; Temperature = deg. C									N5
Custom									N6

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

ADDITIONAL ORDERING INFORMATION FOR MODEL 266NRH		XX	XX	XX	XX	XX	XX
<b>Approvals</b>							
<b>Certificates (multiple selection allowed)</b>							
Inspection certificate EN 10204–3.1 of calibration (9-point)		C1					
Inspection certificate EN 10204–3.1 of the pressure test		C5					
Certificate of compliance with the order EN 10204–2.1 of instrument design		C6					
PMI test of wetted parts		CT					
Metrologic Pattern for Russia	(NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICATION)		Y1				
Metrologic Pattern for Kazakhstan	(NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICATION)		Y2				
Metrologic Pattern for Belarus	(NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICATION)		Y4				
Chinese pattern	(NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICATION)		Y5				
DNV GL approval		(Notes 3, 5)		YA			
Conformity to NAMUR NE 021 (2004)	(NOT APPLICABLE WITH SURGE PROTECTOR CODE "S2")	(Notes 3, 5, 7, 9)		YE			
<b>Material traceability</b>							
Inspection certificate EN 10204–3.1 of process wetted parts (not for gaskets)						H3	
Test report EN 10204–2.2 of pressure bearing and process wetted parts (not for gaskets)						H4	
<b>National radio frequency licence</b>							
Basic countries (Europe, USA, Canada)		(Note 6)		FB			
Argentina		(Note 6)		FA			
United Arab Emirates		(Note 6)		FG			
<b>Electrical connection plug</b>							
One certified stainless steel plug (supplied loose with thread according to housing entries)							Z1

Note 1: Suitable for oxygen service

Note 2: Not available with Housing code J

Note 3: Not available with Output code 7

Note 4: Not available with Housing code A, S, J

Note 5: Not available with Output code 9

Note 6: Not available with Output code 1, 2, 3, 7, 8

Note 7: Not available with Output code 2, 3

Note 8: Not available with Hazardous area certification code WM, WN, WP

Note 9: Not available with Hazardous area certification code EN, E4, E6, EA, EY, EZ, ES, W1, W2, WC, W3, W4, WD, W5, W6, W7, W8, WF, WG, WH, WM, WN, WP

### Standard delivery items (can be differently specified by additional ordering code)

- General purpose (no electrical certification)
- No display, no mounting bracket, no surge protection
- Multilanguage short-form operating instruction manual and labels in english (metal nameplate; self-adhesive certification and tag)
- Configuration with kPa and deg. C units
- No test, inspection or material traceability certificates

**BASIC ORDERING INFORMATION model S26RA Rotating flange diaphragm seals (flush and extended) to ASME B16.5**

Select one character or set of characters from each category and specify complete catalog number.

BASE MODEL - 1 <sup>st</sup> to 5 <sup>th</sup> characters				S	2	6	R	A	X	XX	X	X	XX	X	X	X	X	
Rotating flange diaphragm seal (Raised face flush and extended) to ASME B16.5																		
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character																		
High pressure side									H									
Low pressure side									L									
<b>Mounting Flange Rating / Size</b> - 7 <sup>th</sup> and 8 <sup>th</sup> characters																		
ASME CL 150 / 2 in.																		
ASME CL 300 / 2 in.																		
ASME CL 600 / 2 in.																		
ASME CL 900-1500 / 2 in.																		
ASME CL 150 / 3 in.																		
ASME CL 300 / 3 in.																		
ASME CL 600 / 3 in.																		
ASME CL 900 / 3 in.																		
ASME CL 1500 / 3 in.																		
ASME CL 150 / 4 in.																		
ASME CL 300 / 4 in.																		
<b>Mounting Flange Material</b> - 9 <sup>th</sup> character																		
Carbon steel																		
AISI 316 ss																		
<b>Extensions Length and Material</b> - 10 <sup>th</sup> character																		
Flush																		
50 mm (2 in.)																		
50 mm (2 in.)																		
100 mm (4 in.)																		
100 mm (4 in.)																		
150 mm (6 in.)																		
150 mm (6 in.)																		
<b>Diaphragm Material</b> - 11 <sup>th</sup> and 12 <sup>th</sup> characters																		
AISI 316 L ss																		
AISI 316 L ss - Low thickness (not for extended diaphragm)																		
Hastelloy C-276																		
Hastelloy C-276 - Low thickness (not for extended diaphragm)																		
Hastelloy C-2000 (not for extended diaphragm)																		
Hastelloy C-2000 diaphragm and body (not for extended diaphragm)																		
Inconel 625 (not for extended diaphragm)																		
Tantalum (not for extended diaphragm)																		
AISI 316 L ss gold plated (not for extended diaphragm)																		
AISI 316 L ss with PFA anti-stick coating																		
Hastelloy C-276 with PFA anti-stick coating																		
AISI 316 L ss with PFA coating anti-corrosion and anti-stick																		
Diaflex (AISI with anti-abrasion treatment)																		
Superduplex ss (UNS S32750 to ASTM SA479) (not for extended diaphragm)																		
Monel (not for extended diaphragm)																		

continued  
see next page

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

BASIC ORDERING INFORMATION model S26RA		S	2	6	R	A	X	X	X	X	X	X	X
<b>Seal Surface Finish</b> - 13 <sup>th</sup> character													
Serrated	(Note 4)							1					
Smooth	(Note 15)							2					
<b>Capillary Protection</b> - 14 <sup>th</sup> character													
AISI 316 L ss armour													A
AISI 316 L ss armour with PVC protective cover													B
Extension tube for direct mount seal	(Note 5)												N
<b>Capillary Length m (Feet)</b> - 15 <sup>th</sup> character													
Direct-mount construction	(Note 6)												1
1 (3)	(Note 7)												A
1.5 (5)	(Note 7)												B
2 (7)	(Note 7)												C
2.5 (8)	(Note 7)												D
3 (10)	(Note 7)												E
3.5 (12)	(Note 7)												F
4 (13)	(Note 7)												G
4.5 (15)	(Note 7)												H
5 (17)	(Note 7)												J
5.5 (18)	(Note 7)												K
6 (20)	(Note 7)												L
6.5 (22)	(Note 7)												M
7 (23.5)	(Note 7)												N
7.5 (25)	(Note 7)												P
8 (27)	(Note 7)												Q
9 (30)	(Note 7)												R
10 (33)	(Note 7)												S
12 (40)	(Note 7)												T
14 (47)	(Note 7)												U
16 (53)	(Note 7)												V
<b>Fill Fluid</b> - 16 <sup>th</sup> character													
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)												S
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)												P
Inert oil - Galden G5	(Oxygen service)	(Note 8)											N
Inert oil - Halocarbon 4.2	(Oxygen service)	(Note 8)											D
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)												G
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)												C
Mineral oil Esso Marcol 152	(FDA approved)	(Note 9)											W
Vegetable oil Neobee M-20	(FDA approved)	(Note 9)											A
Glycerin-water 70%	(FDA approved)	(Note 9)											B

continued  
see next page

**BASIC ORDERING INFORMATION model S26RA**

**S 2 6 R A X XX X X XX X X X X X X X X X X X X X**

**Flushing Ring: Hole and Thread - 17<sup>th</sup> character**

None (TO BE SELECTED FOR EXTENDED VERSIONS)				N
1 hole - 1/2 in. NPT	(Note 3)			2
2 holes - 1/2 in. NPT	(Note 3)			3
1 hole - 1/4 in. NPT	(Note 3)			4
2 holes - 1/4 in. NPT	(Note 3)			5

**Flushing Ring Material - 18<sup>th</sup> character**

None	(Note 10)			N
AISI 316 L ss	(Note 11)	NACE		A
Hastelloy C-276	(Notes 11, 12)	NACE		H

**Flushing Ring: Plug and Gasket - 19<sup>th</sup> character**

No plug - No gasket				N
No plug - garlock	(Note 11)			A
No plug - PTFE	(Note 11)			B
No plug - graphite	(Note 11)			C
AISI 316 L ss - no gasket	(Notes 11, 13)	NACE		D
AISI 316 L ss - garlock	(Notes 11, 13)	NACE		E
AISI 316 L ss - PTFE	(Notes 11, 13)	NACE		F
AISI 316 L ss - graphite	(Notes 11, 13)	NACE		G
Hastelloy C-276 - no gasket	(Notes 11, 14)	NACE		H
Hastelloy C-276 - garlock	(Notes 11, 14)	NACE		L
Hastelloy C-276 - PTFE	(Notes 11, 14)	NACE		M
Hastelloy C-276 - graphite	(Notes 11, 14)	NACE		P

- Note 1: Not available with mounting flange rating code E3, E5, G3, G4, G5
- Note 2: Not available with extensions length and material code 2, 4, 6
- Note 3: Not available with extensions length and material code 1, 2, 3, 4, 5, 6
- Note 4: Not available with diaphragm material code MM, LM, TM, NM, KM, YM, WM
- Note 5: Not available with transmitter side of connection code L
- Note 6: Not available with capillary protection code A, B
- Note 7: Not available with capillary protection code N
- Note 8: Suitable for oxygen service
- Note 9: Suitable for food application
- Note 10: Not available with Flushing ring: hole and thread code 2, 3, 4, 5
- Note 11: Not available with Flushing ring: hole and thread code N
- Note 12: Not available with Seal surface finish code 1
- Note 13: Not available with Hastelloy C-276 flushing ring material code H
- Note 14: Not available with AISI 316 L flushing ring material code A
- Note 15: Not available with diaphragm material code ZM

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

### BASIC ORDERING INFORMATION model S26RE Rotating flange diaphragm seals (flush and extended) to EN 1092-1

Select one character or set of characters from each category and specify complete catalog number.

<b>BASE MODEL</b> - 1 <sup>st</sup> to 5 <sup>th</sup> characters	<b>S 2 6 R E</b>	<b>X</b>	<b>XX</b>	<b>X</b>	<b>X</b>	<b>XX</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
Rotating flange diaphragm seal (flush and extended) to EN 1092-1										
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character										
High pressure side										
Low pressure side										
<b>Mounting Flange Rating / Size</b> - 7 <sup>th</sup> and 8 <sup>th</sup> characters										
PN 16 - 40 / DN 50										
PN 63 / DN 50										
PN 100 / DN 50										
PN 16 / DN 80										
PN 40 / DN 80										
PN 63 / DN 80										
PN 100 / DN 80										
PN 16 / DN 100										
PN 40 / DN 100										
<b>Mounting Flange Material</b> - 9 <sup>th</sup> character										
Carbon steel										
AISI 316 ss										
<b>Extensions Length and Material</b> - 10 <sup>th</sup> character										
Flush										F
50 mm. (2 in.)	AISI 316 L ss	(Note 1)								1
50 mm. (2 in.)	Hastelloy C-276	(Note 1)								2
100 mm. (4 in.)	AISI 316 L ss	(Note 1)								3
100 mm. (4 in.)	Hastelloy C-276	(Note 1)								4
150 mm. (6 in.)	AISI 316 L ss	(Note 1)								5
150 mm. (6 in.)	Hastelloy C-276	(Note 1)								6
<b>Diaphragm Material</b> - 11 <sup>th</sup> and 12 <sup>th</sup> characters										
AISI 316 L ss	(Note 2)									NACE SM
AISI 316 L ss - Low thickness (not for extended diaphragm)	(Note 3)									NACE SL
Hastelloy C-276										NACE HM
Hastelloy C-276 - Low thickness (not for extended diaphragm)	(Note 3)									NACE HL
Hastelloy C-2000 (not for extended diaphragm)	(Note 3)									NACE MM
Inconel 625 (not for extended diaphragm)	(Note 3)									NACE LM
Tantalum (not for extended diaphragm)	(Note 3)									NACE TM
AISI 316 L ss gold plated (not for extended diaphragm)	(Note 3)									NACE NM
AISI 316 L ss with PFA anti-stick coating	(Note 2)									NACE KM
Hastelloy C-276 with PFA anti-stick coating										NACE YM
AISI 316 L ss with PFA coating anti-corrosion and anti-stick	(Note 2)									NACE WM
Diaflex (AISI with anti-abrasion treatment)	(Note 2)									NACE FM
Superduplex ss (UNS S32750 to ASTM SA479) (not for extended diaphragm)	(Note 3)									NACE EM
Monel	(Note 3)									NACE GM

continued  
see next page



BASIC ORDERING INFORMATION model S26RE			S	2	R	E	X	X	X	X	X	X	X
<b>Seal Surface Finish</b> - 13 <sup>th</sup> character													
Serrated	(Note 4)	1											
Smooth		2											
<b>Capillary Protection</b> - 14 <sup>th</sup> character													
AISI 316 L ss armour													
AISI 316 L ss armour with PVC protective cover													
Extension tube for direct mount seal	(Note 5)												
<b>Capillary Length m (Feet)</b> - 15 <sup>th</sup> character													
Direct-mount construction	(Note 6)												
1 (3)	(Note 7)												
1.5 (5)	(Note 7)												
2 (7)	(Note 7)												
2.5 (8)	(Note 7)												
3 (10)	(Note 7)												
3.5 (12)	(Note 7)												
4 (13)	(Note 7)												
4.5 (15)	(Note 7)												
5 (17)	(Note 7)												
5.5 (18)	(Note 7)												
6 (20)	(Note 7)												
6.5 (22)	(Note 7)												
7 (23.5)	(Note 7)												
7.5 (25)	(Note 7)												
8 (27)	(Note 7)												
9 (30)	(Note 7)												
10 (33)	(Note 7)												
12 (40)	(Note 7)												
14 (47)	(Note 7)												
16 (53)	(Note 7)												
<b>Fill Fluid</b> - 16 <sup>th</sup> character													
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)												S
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)												P
Inert oil - Galden G5	(Oxygen service)	(Note 8)											N
Inert oil - Halocarbon 4.2	(Oxygen service)	(Note 8)											D
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)												G
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)												C
Mineral oil Esso Marcol 152	(FDA approved)	(Note 9)											W
Vegetable oil Neobee M-20	(FDA approved)	(Note 9)											A
Glycerin-water 70%	(FDA approved)	(Note 9)											B

continued  
see next page

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

BASIC ORDERING INFORMATION model S26RE			S 2 6 R E X XX X X XX X X X X	X	X	X
<b>Flushing Ring: Hole and Thread</b> - 17 <sup>th</sup> character						
None (TO BE SELECTED FOR EXTENDED VERSIONS)				N		
1 hole - 1/2 in. NPT	(Note 3)			2		
2 holes - 1/2 in. NPT	(Note 3)			3		
1 hole - 1/4 in. NPT	(Note 3)			4		
2 holes - 1/4 in. NPT	(Note 3)			5		
<b>Flushing Ring Material</b> - 18 <sup>th</sup> character						
None	(Note 10)				N	
AISI 316 L ss	(Note 11)	NACE				A
Hastelloy C-276	(Notes 11, 12)	NACE				H
<b>Flushing Ring: Plug and Gasket</b> - 19 <sup>th</sup> character						
No plug - No gasket						N
No plug - garlock	(Note 11)					A
No plug - PTFE	(Note 11)					B
No plug - graphite	(Note 11)					C
AISI 316 L ss - no gasket	(Notes 11, 13)	NACE				D
AISI 316 L ss - garlock	(Notes 11, 13)	NACE				E
AISI 316 L ss - PTFE	(Notes 11, 13)	NACE				F
AISI 316 L ss - graphite	(Notes 11, 13)	NACE				G
Hastelloy C-276 - no gasket	(Notes 11, 14)	NACE				H
Hastelloy C-276 - garlock	(Notes 11, 14)	NACE				L
Hastelloy C-276 - PTFE	(Notes 11, 14)	NACE				M
Hastelloy C-276 - graphite	(Notes 11, 14)	NACE				P

- Note 1: Not available with mounting flange rating code N3, N4, P3, P4
- Note 2: Not available with extensions length and material code 2, 4, 6
- Note 3: Not available with extensions length and material code 1, 2, 3, 4, 5, 6
- Note 4: Not available with diaphragm material code MM, LM, TM, NM, KM, YM, WM
- Note 5: Not available with transmitter side of connection code L
- Note 6: Not available with capillary protection code A, B
- Note 7: Not available with capillary protection code N
- Note 8: Suitable for oxygen service
- Note 9: Suitable for food application
- Note 10: Not available with Flushing ring: hole and thread code 2, 3, 4, 5
- Note 11: Not available with Flushing ring: hole and thread code N
- Note 12: Not available with Seal surface finish code 1
- Note 13: Not available with Hastelloy C-276 flushing ring material code H
- Note 14: Not available with AISI 316 L flushing ring material code A

**BASIC ORDERING INFORMATION model S26RJ Rotating flange diaphragm seals (flush) to JIS**

Select one character or set of characters from each category and specify complete catalog number.

<b>BASE MODEL</b> - 1 <sup>st</sup> to 5 <sup>th</sup> characters	S	2	6	R	J	X	XX	X	X	XX	X	X	X	X	X	X	X	X
Rotating flange diaphragm seal (flush) to JIS																		
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character																		
High pressure side																		
Low pressure side																		
<b>Mounting Flange Rating / Size</b> - 7 <sup>th</sup> and 8 <sup>th</sup> characters																		
10K / A50																		
20K / A50																		
40K / A50																		
10K / A80																		
20K / A80																		
40K / A80																		
10K / A100																		
20K / A100																		
<b>Mounting Flange Material</b> - 9 <sup>th</sup> character																		
Carbon steel																		
AISI 316 ss																		
<b>Extensions Length</b> - 10 <sup>th</sup> character																		
Flush																		
<b>Diaphragm Material</b> - 11 <sup>th</sup> and 12 <sup>th</sup> characters																		
AISI 316 L ss																		
Hastelloy C-276																		
Hastelloy C-2000																		
Inconel 625																		
Tantalum																		
AISI 316 L ss gold plated																		
AISI 316 L ss with PFA anti-stick coating																		
Hastelloy C-276 with PFA anti-stick coating																		
AISI 316 L ss with PFA coating anti-corrosion and anti-stick																		
Superduplex ss (UNS S32750 to ASTM SA479)																		
<b>Seal Surface Finish</b> - 13 <sup>th</sup> character																		
Serrated																		
(Note 1)																		
Smooth																		
(Note 2)																		
<b>Capillary Protection</b> - 14 <sup>th</sup> character																		
AISI 316 L ss armour																		
AISI 316 L ss armour with PVC protective cover																		
Extension tube for direct mount seal																		
(Note 2)																		

continued  
see next page

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

BASIC ORDERING INFORMATION model S26RJ			S	2	6	R	J	X	XX	XX	XX	XX	X	X	X	X	X
<b>Capillary Length m (Feet)</b> - 15 <sup>th</sup> character																	
Direct-mount construction	(Note 3)												1				
1 (3)	(Note 4)												A				
1.5 (5)	(Note 4)												B				
2 (7)	(Note 4)												C				
2.5 (8)	(Note 4)												D				
3 (10)	(Note 4)												E				
3.5 (12)	(Note 4)												F				
4 (13)	(Note 4)												G				
4.5 (15)	(Note 4)												H				
5 (17)	(Note 4)												J				
5.5 (18)	(Note 4)												K				
6 (20)	(Note 4)												L				
6.5 (22)	(Note 4)												M				
7 (23.5)	(Note 4)												N				
7.5 (25)	(Note 4)												P				
8 (27)	(Note 4)												Q				
9 (30)	(Note 4)												R				
10 (33)	(Note 4)												S				
12 (40)	(Note 4)												T				
14 (47)	(Note 4)												U				
16 (53)	(Note 4)												V				
<b>Fill Fluid</b> - 16 <sup>th</sup> character																	
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)												S				
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)												P				
Inert oil - Galden G5	(Oxygen service)	(Note 5)											N				
Inert oil - Halocarbon 4.2	(Oxygen service)	(Note 5)											D				
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)												G				
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)												C				
Mineral oil Esso Marcol 152	(FDA approved)	(Note 6)											W				
Vegetable oil Neobee M-20	(FDA approved)	(Note 6)											A				
Glycerin-water 70%	(FDA approved)	(Note 6)											B				
<b>Flushing Ring: Hole and Thread</b> - 17 <sup>th</sup> character																	
None																	N
<b>Flushing Ring Material</b> - 18 <sup>th</sup> character																	
None																	N
<b>Flushing Ring: Plug and Gasket</b> - 19 <sup>th</sup> character																	
None																	N

Note 1: Not available with diaphragm material code HM, MM, LM, TN, NM, KM, YM, WM

Note 2: Not available with transmitter side of connection code L

Note 3: Not available with capillary protection code A, B

Note 4: Not available with capillary protection code N

Note 5: Suitable for oxygen service

Note 6: Suitable for food application

**BASIC ORDERING INFORMATION model S26RR Rotating flange diaphragm seals (flush) - Ring Joint**

Select one character or set of characters from each category and specify complete catalog number.

<b>BASE MODEL</b> - 1 <sup>st</sup> to 5 <sup>th</sup> characters	<b>S</b>	<b>2</b>	<b>6</b>	<b>R</b>	<b>R</b>	<b>X</b>	<b>XX</b>	<b>X</b>	<b>X</b>	<b>XX</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
Rotating flange diaphragm seal (flush) Ring Joint to ASME B16.5																		
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character																		
High pressure side																		
Low pressure side																		
<b>Mounting Flange Rating / Size</b> - 7 <sup>th</sup> and 8 <sup>th</sup> characters																		
ASME CL 150 / 1 1/2 in.																		
ASME CL 300 / 1 1/2 in.																		
ASME CL 600 / 1 1/2 in.																		
ASME CL 900-1500 / 1 1/2 in.																		
ASME CL 2500 / 1 1/2 in.																		
ASME CL 150 / 2 in.																		
ASME CL 300 / 2 in.																		
ASME CL 600 / 2 in.																		
ASME CL 900-1500 / 2 in.																		
ASME CL 2500 / 2 in.																		
ASME CL 150 / 3 in.																		
ASME CL 300 / 3 in.																		
ASME CL 600 / 3 in.																		
ASME CL 900 / 3 in.																		
ASME CL 1500 / 3 in.																		
ASME CL 2500 / 3 in. (NOT AVAILABLE FOR DIRECT MOUNT SEAL)																		
<b>Mounting Flange Material</b> - 9 <sup>th</sup> character																		
Carbon steel																		
AISI 316 ss																		
<b>Extensions Length</b> - 10 <sup>th</sup> character																		
Flush																		
<b>Diaphragm Material</b> - 11 <sup>th</sup> and 12 <sup>th</sup> characters																		
AISI 316 L ss																		
Hastelloy C-276																		
Inconel 625																		
<b>Seal Surface Finish</b> - 13 <sup>th</sup> character																		
Ring joint																		
<b>Capillary Protection</b> - 14 <sup>th</sup> character																		
AISI 316 L ss armour																		
AISI 316 L ss armour with PVC protective cover																		
Extension tube for direct mount seal (Note 1)																		

continued  
see next page

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

BASIC ORDERING INFORMATION model S26RR		S	2	6	R	R	X	XX	XX	XX	XX	X	X	X	X	X
<b>Capillary Length m (Feet)</b> - 15 <sup>th</sup> character																
Direct-mount construction	(Note 2)											1				
1 (3)	(Note 3)											A				
1.5 (5)	(Note 3)											B				
2 (7)	(Note 3)											C				
2.5 (8)	(Note 3)											D				
3 (10)	(Note 3)											E				
3.5 (12)	(Note 3)											F				
4 (13)	(Note 3)											G				
4.5 (15)	(Note 3)											H				
5 (17)	(Note 3)											J				
5.5 (18)	(Note 3)											K				
6 (20)	(Note 3)											L				
6.5 (22)	(Note 3)											M				
7 (23.5)	(Note 3)											N				
7.5 (25)	(Note 3)											P				
8 (27)	(Note 3)											Q				
9 (30)	(Note 3)											R				
10 (33)	(Note 3)											S				
12 (40)	(Note 3)											T				
14 (47)	(Note 3)											U				
16 (53)	(Note 3)											V				
<b>Fill Fluid</b> - 16 <sup>th</sup> character																
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)											S				
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)											P				
Inert oil - Galden G5	(Oxygen service)						(Note 4)					N				
Inert oil - Halocarbon 4.2	(Oxygen service)						(Note 4)					D				
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)											G				
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)											C				
Mineral oil Esso Marcol 152	(FDA approved)						(Note 5)					W				
Vegetable oil Neobee M-20	(FDA approved)						(Note 5)					A				
Glycerin-water 70%	(FDA approved)						(Note 5)					B				
<b>Flushing Ring: Hole and Thread</b> - 17 <sup>th</sup> character																
None																N
<b>Flushing Ring Material</b> - 18 <sup>th</sup> character																
None																N
<b>Flushing Ring: Plug and Gasket</b> - 19 <sup>th</sup> character																
None																N

Note 1: Not available with transmitter side of connection code L  
 Note 2: Not available with capillary protection code A, B  
 Note 3: Not available with capillary protection code N  
 Note 4: Suitable for oxygen service  
 Note 5: Suitable for food application

**BASIC ORDERING INFORMATION model S26RH Rotating flange diaphragm seals (flush) to ISO 10423 (API standards)**

Select one character or set of characters from each category and specify complete catalog number.

<b>BASE MODEL</b> - 1 <sup>st</sup> to 5 <sup>th</sup> characters	S	2	6	R	H	X	XX	X	X	XX	X	X	X	X	X	X	X
Rotating flange diaphragm seal (flush) to ISO 10423																	
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character																	
High pressure side						H											
Low pressure side						L											
<b>Size / Rating</b> - 7 <sup>th</sup> and 8 <sup>th</sup> characters																	
ISO 10423 1 13/16 in. / API 10000 (69 MPa)																	
ISO 10423 1 13/16 in. / API 15000 (103.5 MPa)																	
ISO 10423 2 1/16 in. / API 10000 (69 MPa)																	
ISO 10423 2 1/16 in. / API 15000 (103.5 MPa)																	
<b>Mounting Flange Material</b> - 9 <sup>th</sup> character																	
AISI 316 ss																	
<b>Extensions Length</b> - 10 <sup>th</sup> character																	
Flush																	
<b>Diaphragm Material</b> - 11 <sup>th</sup> and 12 <sup>th</sup> characters																	
AISI 316 L ss																	
Hastelloy C-276																	
Inconel 625																	
<b>Seal Surface Finish</b> - 13 <sup>th</sup> character																	
According to ISO 10423																	
<b>Capillary Protection</b> - 14 <sup>th</sup> character																	
AISI 316 L ss armour																	
AISI 316 L ss armour with PVC protective cover																	
Extension tube for direct mount seal (Note 1)																	

continued  
see next page

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

BASIC ORDERING INFORMATION model S26RH		S	2	6	R	H	X	XX	XX	XX	XX	X	X	X	X	X	
<b>Capillary Length m (Feet)</b> - 15 <sup>th</sup> character																	
Direct-mount construction	(Note 2)												1				
1 (3)	(Note 3)												A				
1.5 (5)	(Note 3)												B				
2 (7)	(Note 3)												C				
2.5 (8)	(Note 3)												D				
3 (10)	(Note 3)												E				
3.5 (12)	(Note 3)												F				
4 (13)	(Note 3)												G				
4.5 (15)	(Note 3)												H				
5 (17)	(Note 3)												J				
5.5 (18)	ONLY AVAILABLE FOR SIZE 2 1/16 in (code S1, S2)	(Note 3)											K				
6 (20)	ONLY AVAILABLE FOR SIZE 2 1/16 in (code S1, S2)	(Note 3)											L				
6.5 (22)	ONLY AVAILABLE FOR SIZE 2 1/16 in (code S1, S2)	(Note 3)											M				
7 (23.5)	ONLY AVAILABLE FOR SIZE 2 1/16 in (code S1, S2)	(Note 3)											N				
7.5 (25)	ONLY AVAILABLE FOR SIZE 2 1/16 in (code S1, S2)	(Note 3)											P				
8 (27)	ONLY AVAILABLE FOR SIZE 2 1/16 in (code S1, S2)	(Note 3)											Q				
<b>Fill Fluid</b> - 16 <sup>th</sup> character																	
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)													S			
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)													P			
Inert oil - Galden G5	(Oxygen service)	(Note 4)												N			
Inert oil - Halocarbon 4.2	(Oxygen service)	(Note 4)												D			
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)													G			
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)													C			
<b>Flushing Ring: Hole and Thread</b> - 17 <sup>th</sup> character																	
None																	N
<b>Flushing Ring Material</b> - 18 <sup>th</sup> character																	
None																	N
<b>Flushing Ring: Plug and Gasket</b> - 19 <sup>th</sup> character																	
None																	N

Note 1: Not available with transmitter side of connection code L  
 Note 2: Not available with capillary protection code A, B  
 Note 3: Not available with capillary protection code N  
 Note 4: Suitable for oxygen service



**BASIC ORDERING INFORMATION model S26FA Fixed flange diaphragm seals (flush) to ASME B16.5**

Select one character or set of characters from each category and specify complete catalog number.

<b>BASE MODEL</b> - 1 <sup>st</sup> to 5 <sup>th</sup> characters	S	2	6	F	A	X	XX	X	X	XX	X	X	X	X
Fixed flange diaphragm seal (flush) to ASME B16.5														
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character														
High pressure side						H								
Low pressure side						L								
<b>Mounting Flange Rating / Size</b> - 7 <sup>th</sup> and 8 <sup>th</sup> characters														
ASME CL 150 / 2 in.							E1							
ASME CL 300 / 2 in.							E2							
ASME CL 600 / 2 in.							E3							
ASME CL 150 / 3 in.							G1							
ASME CL 300 / 3 in.							G2							
ASME CL 600 / 3 in.							G3							
ASME CL 150 / 4 in.							H1							
<b>Mounting Flange Material</b> - 9 <sup>th</sup> character														
AISI 316 L ss									S					
<b>Extensions Length and Material</b> - 10 <sup>th</sup> character														
Flush										F				
50 mm. (2 in.)				AISI 316 L ss							1			
100 mm. (4 in.)				AISI 316 L ss								3		
150 mm. (6 in.)				AISI 316 L ss									5	
<b>Diaphragm Material</b> - 11 <sup>th</sup> and 12 <sup>th</sup> characters														
AISI 316 L ss							NACE						SM	
AISI 316 L ss - Low thickness					(Note 1)		NACE						SL	
Hastelloy C-276							NACE						HM	
Hastelloy C-276 - Low thickness					(Note 1)		NACE						HL	
Hastelloy C-2000					(Note 1)		NACE						MM	
Inconel 625					(Note 1)		NACE						LM	

continued  
see next page

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

BASIC ORDERING INFORMATION model S26FA		S	2	6	F	A	X	XX	X	XX	X	X	X	X	X
<b>Seal Surface Finish</b> - 13 <sup>th</sup> character															
Serrated	(Note 2)														1
Smooth															2
<b>Capillary Protection</b> - 14 <sup>th</sup> character															
AISI 316 L ss armour															A
AISI 316 L ss armour with PVC protective cover															B
Extension tube for direct mount seal	(Note 3)														N
<b>Capillary Length m (Feet)</b> - 15 <sup>th</sup> character															
Direct-mount construction	(Note 4)														1
1 (3)	(Note 5)														A
1.5 (5)	(Note 5)														B
2 (7)	(Note 5)														C
2.5 (8)	(Note 5)														D
3 (10)	(Note 5)														E
3.5 (12)	(Note 5)														F
4 (13)	(Note 5)														G
4.5 (15)	(Note 5)														H
5 (17)	(Note 5)														J
5.5 (18)	(Note 5)														K
6 (20)	(Note 5)														L
6.5 (22)	(Note 5)														M
7 (23.5)	(Note 5)														N
7.5 (25)	(Note 5)														P
8 (27)	(Note 5)														Q
9 (30)	(Note 5)														R
10 (33)	(Note 5)														S
12 (40)	(Note 5)														T
14 (47)	(Notes 1, 5)														U
16 (53)	(Notes 1, 5)														V
<b>Fill Fluid</b> - 16 <sup>th</sup> character															
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)														S
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)														P
Inert oil - Galden G5	(Oxygen service)														N
Inert oil - Halocarbon 4.2	(Oxygen service)														D
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)														G
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)														C
Mineral oil Esso Marcol 152	(FDA approved)														W
Vegetable oil Neobee M-20	(FDA approved)														A
Glycerin-water 70%	(FDA approved)														B

continued  
see next page

**BASIC ORDERING INFORMATION model S26FA**

S 2 6 F A X XX X X XX X X X X X

X X X

**Flushing Ring: Hole and Thread - 17<sup>th</sup> character**

None				N
1 hole - 1/2 in. NPT	(Note 1)			2
2 holes - 1/2 in. NPT	(Note 1)			3
1 hole - 1/4 in. NPT	(Note 1)			4
2 holes - 1/4 in. NPT	(Note 1)			5

**Flushing Ring Material - 18<sup>th</sup> character**

None	(Note 8)			N
AISI 316 L ss	(Note 9)	NACE		A
Hastelloy C-276	(Notes 9, 10)	NACE		H

**Flushing Ring: Plug and Gasket - 19<sup>th</sup> character**

No plug - No gasket				N
No plug - garlock	(Note 9)			A
No plug - PTFE	(Note 9)			B
No plug - graphite	(Note 9)			C
AISI 316 L ss - no gasket	(Notes 9, 11)	NACE		D
AISI 316 L ss - garlock	(Notes 9, 11)	NACE		E
AISI 316 L ss - PTFE	(Notes 9, 11)	NACE		F
AISI 316 L ss - graphite	(Notes 9, 11)	NACE		G
Hastelloy C-276 - no gasket	(Notes 9, 12)	NACE		H
Hastelloy C-276 - garlock	(Notes 9, 12)	NACE		L
Hastelloy C-276 - PTFE	(Notes 9, 12)	NACE		M
Hastelloy C-276 - graphite	(Notes 9, 12)	NACE		P

- Note 1: Not available with extensions length and material code 1, 3, 5
- Note 2: Not available with diaphragm material code MM, LM
- Note 3: Not available with transmitter side of connection code L
- Note 4: Not available with capillary protection code A, B
- Note 5: Not available with capillary protection code N
- Note 6: Suitable for oxygen service
- Note 7: Suitable for food application
- Note 8: Not available with Flushing ring: hole and thread code 2, 3, 4, 5
- Note 9: Not available with Flushing ring: hole and thread code N
- Note 10: Not available with Seal surface finish code 1
- Note 11: Not available with Hastelloy C-276 flushing ring material code H
- Note 12: Not available with AISI 316 L flushing ring material code A

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

### BASIC ORDERING INFORMATION model S26FE Fixed flange diaphragm seals (flush) to EN 1092-1

Select one character or set of characters from each category and specify complete catalog number.

BASE MODEL - 1 <sup>st</sup> to 5 <sup>th</sup> characters	S	2	6	F	E	X	XX	X	X	XX	X	X	X	X
Fixed flange diaphragm seal (flush) to EN 1092-1														
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character														
High pressure side						H								
Low pressure side						L								
<b>Mounting Flange Rating / Size</b> - 7 <sup>th</sup> and 8 <sup>th</sup> characters														
PN 16 / DN 50														
PN 40 / DN 50														
PN 63 / DN 50					(Note 1)									
PN 100 / DN 50					(Note 1)									
PN 16 / DN 80														
PN 40 / DN 80														
PN 63 / DN 80					(Note 1)									
PN 100 / DN 80					(Note 1)									
PN 16 / DN 100														
<b>Mounting Flange Material</b> - 9 <sup>th</sup> character														
AISI 316 L ss														S
<b>Extensions Length</b> - 10 <sup>th</sup> character														
Flush														F
50 mm. (2 in.)					AISI 316 L ss									1
100 mm. (4 in.)					AISI 316 L ss									3
150 mm. (6 in.)					AISI 316 L ss									5
<b>Diaphragm Material</b> - 11 <sup>th</sup> and 12 <sup>th</sup> characters														
AISI 316 L ss														NACE
AISI 316 L ss - Low thickness (not for extended diaphragm)					(Note 1)									NACE
Hastelloy C-276														NACE
Hastelloy C-276 - Low thickness (not for extended diaphragm)					(Note 1)									NACE
Hastelloy C-2000 (not for extended diaphragm)					(Note 1)									NACE
Inconel 625 (not for extended diaphragm)					(Note 1)									NACE
														SM
														SL
														HM
														HL
														MM
														LM

continued  
see next page

BASIC ORDERING INFORMATION model S26FE			S	2	6	F	E	X	X	X	X	X	X	X	X	X
<b>Seal Surface Finish</b> - 13 <sup>th</sup> character																
Serrated	(Note 2)	1														
Smooth		2														
Form E - Spigot type	(Notes 1, 3)	4														
Form D - Groove type	(Notes 1, 3, 4)	6														
<b>Capillary Protection</b> - 14 <sup>th</sup> character																
AISI 316 L ss armour																
AISI 316 L ss armour with PVC protective cover																
Extension tube for direct mount seal	(Note 5)															
<b>Capillary Length m (Feet)</b> - 15 <sup>th</sup> character																
Direct-mount construction	(Note 6)															
1 (3)	(Note 7)															
1.5 (5)	(Note 7)															
2 (7)	(Note 7)															
2.5 (8)	(Note 7)															
3 (10)	(Note 7)															
3.5 (12)	(Note 7)															
4 (13)	(Note 7)															
4.5 (15)	(Note 7)															
5 (17)	(Note 7)															
5.5 (18)	(Note 7)															
6 (20)	(Note 7)															
6.5 (22)	(Note 7)															
7 (23.5)	(Note 7)															
7.5 (25)	(Note 7)															
8 (27)	(Note 7)															
9 (30)	(Note 7)															
10 (33)	(Note 7)															
12 (40)	(Note 7)															
14 (47)	(Notes 1, 7)															
16 (53)	(Notes 1, 7)															
<b>Fill Fluid</b> - 16 <sup>th</sup> character																
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)															
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)															
Inert oil - Galden G5	(Oxygen service)	(Note 8)														
Inert oil - Halocarbon 4.2	(Oxygen service)	(Note 8)														
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)															
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)															
Mineral oil Esso Marcol 152	(FDA approved)	(Note 9)														
Vegetable oil Neobee M-20	(FDA approved)	(Note 9)														
Glycerin-water 70%	(FDA approved)	(Note 9)														

continued  
see next page

# Model 266DRH Differential

# Model 266HRH Gauge

# Model 266NRH Absolute

BASIC ORDERING INFORMATION model S26FE			S	2	6	F	E	X	XX	X	X	XX	X	X	X	X	X	X
<b>Flushing Ring: Hole and Thread</b> - 17 <sup>th</sup> character																		
None																		N
1 hole - 1/2 in. NPT		(Notes 1, 10)																2
2 holes - 1/2 in. NPT		(Notes 1, 10)																3
1 hole - 1/4 in. NPT		(Notes 1, 10)																4
2 holes - 1/4 in. NPT		(Notes 1, 10)																5
<b>Flushing Ring Material</b> - 18 <sup>th</sup> character																		
None		(Note 11)																N
AISI 316 L ss		(Note 12)								NACE								A
Hastelloy C-276		(Notes 12, 13)								NACE								H
<b>Flushing Ring: Plug and Gasket</b> - 19 <sup>th</sup> character																		
No plug - No gasket																		N
No plug - garlock		(Note 12)																A
No plug - PTFE		(Note 12)																B
No plug - graphite		(Note 12)																C
AISI 316 L ss - no gasket		(Notes 12, 14)								NACE								D
AISI 316 L ss - garlock		(Notes 12, 14)								NACE								E
AISI 316 L ss - PTFE		(Notes 12, 14)								NACE								F
AISI 316 L ss - graphite		(Notes 12, 14)								NACE								G
Hastelloy C-276 - no gasket		(Notes 12, 15)								NACE								H
Hastelloy C-276 - garlock		(Notes 12, 15)								NACE								L
Hastelloy C-276 - PTFE		(Notes 12, 15)								NACE								M
Hastelloy C-276 - graphite		(Notes 12, 15)								NACE								P

- Note 1: Not available with extensions length and material code 1, 3, 5
- Note 2: Not available with diaphragm material code MM, LM
- Note 3: Not available with DN 100 size code Q1
- Note 4: Not available with diaphragm material code HM, HL, MM, LM
- Note 5: Not available with transmitter side of connection code L
- Note 6: Not available with capillary protection code A, B
- Note 7: Not available with capillary protection code N
- Note 8: Suitable for oxygen service
- Note 9: Suitable for food application
- Note 10: Not available with Seal surface finish code 4, 6
- Note 11: Not available with Flushing ring: hole and thread code 2, 3, 4, 5
- Note 12: Not available with Flushing ring: hole and thread code N
- Note 13: Not available with Seal surface finish code 1
- Note 14: Not available with Hastelloy C-276 flushing ring material code H
- Note 15: Not available with AISI 316 L flushing ring material code A

**BASIC ORDERING INFORMATION model S26MA Off-line flange diaphragm seals**

Select one character or set of characters from each category and specify complete catalog number.

<b>BASE MODEL</b> - 1 <sup>st</sup> to 5 <sup>th</sup> characters	S	2	6	M	A	X	XX	X	XX	X	X	X	X	X
Off-line flange diaphragm seal to ASME B16.5														
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character														
High pressure side						H								
Low pressure side						L								
<b>Mounting Flange Rating / Size</b> - 7 <sup>th</sup> and 8 <sup>th</sup> characters														
ASME CL 150 / 1/2 in.							A1							
ASME CL 300 / 1/2 in.							A2							
ASME CL 150 / 1 in.							C1							
ASME CL 300 / 1 in.							C2							
ASME CL 150 / 1 1/2 in.							D1							
ASME CL 300 / 1 1/2 in.							D2							
<b>Mounting Flange Material / Seat Form</b> - 9 <sup>th</sup> character														
AISI 316 L ss / Form RF (raised face) - serrated finish				NACE	(Note 6)				S					
Hastelloy C-276 / Form RF (raised face) - serrated finish				NACE	(Note 6)				H					
Hastelloy C-2000 / Form RF (raised face) - serrated finish				NACE	(Note 7)				Y					
<b>Diaphragm Material</b> - 10 <sup>th</sup> and 11 <sup>th</sup> characters														
AISI 316 L ss				NACE						SM				
Hastelloy C-276				NACE						HM				
Hastelloy C-2000				NACE						MM				
Hastelloy C-2000 diaphragm and body				NACE						ZM				
Inconel 625				NACE						LM				
Tantalum										TM				
AISI 316 L ss gold plated				NACE						NM				
<b>Capillary Protection</b> - 12 <sup>th</sup> character														
AISI 316 L ss armour											A			
AISI 316 L ss armour with PVC protective cover											B			
Extension tube for direct mount seal					(Note 1)						N			

continued  
see next page

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

BASIC ORDERING INFORMATION model S26MA			S	2	M	A	X	XX	X	XX	X
<b>Capillary Length m (Feet)</b> - 13 <sup>th</sup> character											
Direct-mount construction	(Note 2)										1
1 (3)	(Note 3)										A
1.5 (5)	(Note 3)										B
2 (7)	(Note 3)										C
2.5 (8)	(Note 3)										D
3 (10)	(Note 3)										E
3.5 (12)	(Note 3)										F
4 (13)	(Note 3)										G
4.5 (15)	(Note 3)										H
5 (17)	(Note 3)										J
5.5 (18)	(Note 3)										K
6 (20)	(Note 3)										L
6.5 (22)	(Note 3)										M
7 (23.5)	(Note 3)										N
7.5 (25)	(Note 3)										P
8 (27)	(Note 3)										Q
9 (30)	(Note 3)										R
10 (33)	(Note 3)										S
12 (40)	(Note 3)										T
<b>Fill Fluid</b> - 14 <sup>th</sup> character											
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)										S
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)										P
Inert oil - Galden G5	(Oxygen service)	(Note 4)									N
Inert oil - Halocarbon 4.2	(Oxygen service)	(Note 4)									D
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)										G
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)										C
Mineral oil Esso Marcol 152	(FDA approved)	(Note 5)									W
Vegetable oil Neobee M-20	(FDA approved)	(Note 5)									A
Glycerin-water 70%	(FDA approved)	(Note 5)									B
<b>Flushing Connections</b> - 15 <sup>th</sup> character											
Not required											1
Provided (with 2 plugs supplied)											Q
<b>Gasket</b> - 16 <sup>th</sup> character											
PTFE											2
Viton®		(Note 6)									3
Graphite		(Note 6)									7

Note 1: Not available with transmitter side of connection code L

Note 2: Not available with capillary protection code A, B

Note 3: Not available with capillary protection code N

Note 4: Suitable for oxygen service

Note 5: Suitable for food application

Note 6: Not available with diaphragm material code ZM

Note 7: Not available with diaphragm material code SM, HM, MM, LM, TM, NM



**BASIC ORDERING INFORMATION model S26ME Off-line flange diaphragm seals**

Select one character or set of characters from each category and specify complete catalog number.

BASE MODEL - 1 <sup>st</sup> to 5 <sup>th</sup> characters		S	2	6	M	E	X	XX	X	XX	X	X	X	X
Off-line flange diaphragm seal to EN 1092-1														
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character														
High pressure side							H							
Low pressure side							L							
<b>Mounting Flange Rating / Size</b> - 7 <sup>th</sup> and 8 <sup>th</sup> characters														
PN 16 - 40 / DN 25									L2					
PN 16 - 40 / DN 40									M2					
<b>Mounting Flange Material / Seat Form</b> - 9 <sup>th</sup> character														
AISI 316 L ss / Form B1 - serrated finish						NACE					S			
Hastelloy C-276 / Form B1 - serrated finish						NACE					H			
<b>Diaphragm Material</b> - 10 <sup>th</sup> and 11 <sup>th</sup> characters														
AISI 316 L ss						NACE						SM		
Hastelloy C-276						NACE						HM		
Hastelloy C-2000						NACE						MM		
Inconel 625						NACE						LM		
Tantalum												TM		
AISI 316 L ss gold plated						NACE						NM		
<b>Capillary Protection</b> - 12 <sup>th</sup> character														
AISI 316 L ss armour													A	
AISI 316 L ss armour with PVC protective cover													B	
Extension tube for direct mount seal														N
														(Note 1)

continued  
see next page

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

BASIC ORDERING INFORMATION model S26ME			S	2	6	M	E	X	XX	X	XX	X	X
<b>Capillary Length m (Feet)</b> - 13 <sup>th</sup> character													
Direct-mount construction	(Note 2)											1	
1 (3)	(Note 3)											A	
1.5 (5)	(Note 3)											B	
2 (7)	(Note 3)											C	
2.5 (8)	(Note 3)											D	
3 (10)	(Note 3)											E	
3.5 (12)	(Note 3)											F	
4 (13)	(Note 3)											G	
4.5 (15)	(Note 3)											H	
5 (17)	(Note 3)											J	
5.5 (18)	(Note 3)											K	
6 (20)	(Note 3)											L	
6.5 (22)	(Note 3)											M	
7 (23.5)	(Note 3)											N	
7.5 (25)	(Note 3)											P	
8 (27)	(Note 3)											Q	
9 (30)	(Note 3)											R	
10 (33)	(Note 3)											S	
12 (40)	(Note 3)											T	
<b>Fill Fluid</b> - 14 <sup>th</sup> character													
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)												S
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)												P
Inert oil - Galden G5	(Oxygen service)	(Note 4)											N
Inert oil - Halocarbon 4.2	(Oxygen service)	(Note 4)											D
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)												G
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)												C
Mineral oil Esso Marcol 152	(FDA approved)	(Note 5)											W
Vegetable oil Neobee M-20	(FDA approved)	(Note 5)											A
Glycerin-water 70%	(FDA approved)	(Note 5)											B
<b>Flushing Connections</b> - 15 <sup>th</sup> character													
Not required													1
Provided (with 2 plugs supplied)													Q
<b>Gasket</b> - 16 <sup>th</sup> character													
PTFE													2
Viton®													3
Graphite													7

Note 1: Not available with transmitter side of connection code L

Note 2: Not available with capillary protection code A, B

Note 3: Not available with capillary protection code N

Note 4: Suitable for oxygen service

Note 5: Suitable for food application

**BASIC ORDERING INFORMATION model S26TT Off-line threaded diaphragm seals**

Select one character or set of characters from each category and specify complete catalog number.

BASE MODEL - 1 <sup>st</sup> to 5 <sup>th</sup> characters	S	2	6	T	T	X	X	X	X	XX	X	X	X	X
Off-line threaded diaphragm seal														
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character														
High pressure side														
Low pressure side														
<b>Size</b> - 7 <sup>th</sup> character														
1/4 in. NPT-f														
1/2 in. NPT-f														
3/4 in. NPT-f														
1 in. NPT-f														
1 1/2 in. NPT-f														
<b>Bolts material</b> - 8 <sup>th</sup> character														
AISI 316 ss														
Carbon steel														
Alloy steel														
<b>Mounting Flange Material</b> - 9 <sup>th</sup> character														
AISI 316 L ss														
Hastelloy C-276														
<b>Diaphragm Material</b> - 10 <sup>th</sup> and 11 <sup>th</sup> characters														
AISI 316 L ss														
Hastelloy C-276														
Hastelloy C-2000														
Inconel 625														
Tantalum														
AISI 316 L ss gold plated														
<b>Capillary Protection</b> - 12 <sup>th</sup> character														
AISI 316 L ss armour														A
AISI 316 L ss armour with PVC protective cover														B
Extension tube for direct mount seal (Note 1)														N

continued  
see next page

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

BASIC ORDERING INFORMATION model S26TT			S	2	T	T	X	XX	X	XX	X	X
<b>Capillary Length m (Feet)</b> - 13 <sup>th</sup> character												
Direct-mount construction	(Note 2)										1	
1 (3)	(Note 3)										A	
1.5 (5)	(Note 3)										B	
2 (7)	(Note 3)										C	
2.5 (8)	(Note 3)										D	
3 (10)	(Note 3)										E	
3.5 (12)	(Note 3)										F	
4 (13)	(Note 3)										G	
4.5 (15)	(Note 3)										H	
5 (17)	(Note 3)										J	
5.5 (18)	(Note 3)										K	
6 (20)	(Note 3)										L	
6.5 (22)	(Note 3)										M	
7 (23.5)	(Note 3)										N	
7.5 (25)	(Note 3)										P	
8 (27)	(Note 3)										Q	
9 (30)	(Note 3)										R	
10 (33)	(Note 3)										S	
12 (40)	(Note 3)										T	
<b>Fill Fluid</b> - 14 <sup>th</sup> character												
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)											S
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)											P
Inert oil - Galden G5	(Oxygen service)	(Note 4)										N
Inert oil - Halocarbon 4.2	(Oxygen service)	(Note 4)										D
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)											G
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)											C
Mineral oil Esso Marcol 152	(FDA approved)	(Note 5)										W
Vegetable oil Neobee M-20	(FDA approved)	(Note 5)										A
Glycerin-water 70%	(FDA approved)	(Note 5)										B
<b>Flushing Connections</b> - 15 <sup>th</sup> character												
Not required												1
Provided (with 2 plugs supplied)		(Note 6)										Q
<b>Gasket</b> - 16 <sup>th</sup> character												
PTFE												2
Viton®												3
Graphite												7

Note 1: Not available with transmitter side of connection code L  
 Note 2: Not available with capillary protection code A, B  
 Note 3: Not available with capillary protection code N  
 Note 4: Suitable for oxygen service  
 Note 5: Suitable for food application  
 Note 6: Not available with size code 5

**BASIC ORDERING INFORMATION model S26SS Sanitary and food diaphragm seals**

Select one character or set of characters from each category and specify complete catalog number.

BASE MODEL - 1 <sup>st</sup> to 5 <sup>th</sup> characters	S	2	6	S	S	X	X	XX	X	X	X	X	X
Sanitary and food diaphragm seal													
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character													
High pressure side						H							
Low pressure side						L							
<b>Mounting connection</b> - 7 <sup>th</sup> character													
Union nut DIN 11851 – F50 (not 3-A authorized)													
Union nut DIN 11851 – F80 (not 3-A authorized)													
2 in. Triclamp													
3 in. Triclamp													
4 in. Triclamp													
2 in. Cherry Burrell													
3 in. Cherry Burrell													
4 in. Cherry Burrell													
4 in. Sanitary flush diaphragm													
4 in. Sanitary extended (2 in.) diaphragm													
4 in. Sanitary extended (4 in.) diaphragm													
4 in. Sanitary extended (6 in.) diaphragm													
4in Cherry Burrell aseptic - ONLY REMOTE MOUNT													
4in aseptic flanged connection - ONLY REMOTE MOUNT													
Beverage application bolted seal (not 3-A authorized) - ONLY DIRECT MOUNT WITH 266HRH, 266NRH													
<b>Diaphragm Material</b> - 8 <sup>th</sup> and 9 <sup>th</sup> characters													
AISI 316 L ss													SM
<b>Capillary Protection</b> - 10 <sup>th</sup> character													
AISI 316 L ss armour (Note 1)													A
AISI 316 L ss armour with PVC protective cover (Note 1)													B
Extension tube for direct mount seal (Note 2)													N
<b>Capillary Length m (Feet)</b> - 11 <sup>th</sup> character													
Direct-mount construction (Note 3)													1
1 (3) (Note 4)													A
1.5 (5) (Note 4)													B
2 (7) (Note 4)													C
2.5 (8) (Note 4)													D
3 (10) (Note 4)													E
3.5 (12) (Note 4)													F
4 (13) (Note 4)													G
4.5 (15) (Note 4)													H
5 (17) (Note 4)													J
5.5 (18) (Note 4)													K
6 (20) (Note 4)													L
6.5 (22) (Note 4)													M
7 (23.5) (Note 4)													N
7.5 (25) (Note 4)													P
8 (27) (Note 4)													Q
9 (30) (Note 4)													R
10 (33) (Note 4)													S

continued  
see next page

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

BASIC ORDERING INFORMATION model S26SS			S	2	S	S	X	X	X	X	X	X	X	X
<b>Fill Fluid</b> - 12 <sup>th</sup> character														
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)											S		
Inert oil - Halocarbon 4.2	(-40 to 250 °C; -40 to 480 °F)	(Note 5)										D		
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)											C		
Mineral oil Esso Marcol 152	(FDA approved)	(Note 6)										W		
Vegetable oil Neobee M-20	(FDA approved)	(Note 6)										A		
Glycerin-water 70%	(FDA approved)	(Note 6)										B		
<b>Clamp/Fittings</b> - 13 <sup>th</sup> character														
None														1
2 in. V-band Clamp (for 2 in. Triclamp)														A
3 in. V-band Clamp (for 3 in. Triclamp)														B
4 in. V-band Clamp (for 4 in. Triclamp, 4 in. Cherry Burrell, 4 in. Sanitary flush and 4 in. aseptic flanged)														C
4 in. Tank spud, tank wall up to 4.7mm (0.18) and 4 in. V-band Clamp (for 4 in. Sanitary flush seal)														D
4 in. Tank spud, tank wall up to 9.5mm (0.37) and 4 in. V-band Clamp (for 4 in. Sanitary flush seal)														E
4 in. schedule 5 V-band clamp (for 4 in. Sanitary extended seal)														F
Tank spud for 2 in. extension and 4 in. schedule 5 V-band clamp (for 4 in. Sanitary extended 2 in. seal)														G
Tank spud for 4 in. extension and 4 in. schedule 5 V-band clamp (for 4 in. Sanitary extended 4 in. seal)														H
Tank spud for 6 in. extension and 4 in. schedule 5 V-band clamp (for 4 in. Sanitary extended 6 in. seal)														J
Aseptic tank spud (for 4 in. aseptic flanged seal)														P
Flanged tank spud with 6 holes (for 1 1/2 in. beverage seal)														K
<b>Gasket</b> - 14 <sup>th</sup> character														
None														1
Ethylene propylene gasket DN100 (for 4 in. Sanitary extended seal) - (EPDM 3-A 18-03 Class II)														A
Ethylene propylene gasket (for 1 1/2 in. beverage seal)														B
Ethylene propylene gasket DN50 (for F50 Union nut seal)														C
Ethylene propylene gasket DN80 (for F80 Union nut seal)														D
Ethylene propylene gasket (for 4 in. Sanitary flush and 4 in. aseptic) - (EPDM 3-A 18-03 Class II)														G

Note 1: Not available with beverage bolted seal connection code T

Note 2: Not available with transmitter side of connection code L

Note 3: Not available with capillary protection code A, B

Note 4: Not available with capillary protection code N

Note 5: Suitable for oxygen service

Note 6: Suitable for food application

**BASIC ORDERING INFORMATION model S26VN Socket and saddle diaphragm seals**

Select one character or set of characters from each category and specify complete catalog number.

<b>BASE MODEL</b> - 1 <sup>st</sup> to 5 <sup>th</sup> characters	S 2 6 V N	X	XX	X	X	X	X	X
Socket and saddle diaphragm seal								
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character								continued see next page
High pressure side		H						
Low pressure side		L						
<b>Diaphragm Material</b> - 7 <sup>th</sup> and 8 <sup>th</sup> characters								
AISI 316 L ss	NACE		SM					
Hastelloy C-276	NACE		HM					
Hastelloy C-2000	NACE		MM					
Inconel 625	NACE		LM					
Tantalum			TM					
AISI 316 L ss gold plated	NACE		NM					
Superduplex ss (UNS S32750 to ASTM SA479)	NACE		EM					
<b>Capillary Protection</b> - 9 <sup>th</sup> character								
AISI 316 L ss armour							A	
AISI 316 L ss armour with PVC protective cover							B	
Extension tube for direct mount seal (Note 1)							N	

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

BASIC ORDERING INFORMATION model S26VN			S	2	V	N	X	XX	X
<b>Capillary Length m (Feet)</b> - 10 <sup>th</sup> character									
Direct-mount construction	(Note 2)						1		
1 (3)	(Note 3)						A		
1.5 (5)	(Note 3)						B		
2 (7)	(Note 3)						C		
2.5 (8)	(Note 3)						D		
3 (10)	(Note 3)						E		
3.5 (12)	(Note 3)						F		
4 (13)	(Note 3)						G		
4.5 (15)	(Note 3)						H		
5 (17)	(Note 3)						J		
<b>Fill Fluid</b> - 11 <sup>th</sup> character									
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)								S
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)								P
Inert oil - Galden G5	(Oxygen service)	(Note 4)							N
Inert oil - Halocarbon 4.2	(Oxygen service)	(Note 4)							D
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)								G
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)								C
Mineral oil Esso Marcol 152	(FDA approved)	(Note 5)							W
Vegetable oil Neobee M-20	(FDA approved)	(Note 5)							A
Glycerin-water 70%	(FDA approved)	(Note 5)							B
<b>Process Fitting Connections</b> - 12 <sup>th</sup> character									
Not required									N
Saddle 2 in.									1
Saddle 2 1/2 in.									2
Saddle 3 in.									3
Saddle 4 in.									4
Saddle 5 in.									5
Saddle 6 in.									6
Socket 1/2 in.									A
Socket 3/4 in.									B
Socket 1 in.									C
Socket 1 1/2 in.									D
Socket 2 in.									E
<b>Gasket</b> - 13 <sup>th</sup> character									
PTFE									2
Graphite									7

Note 1: Not available with transmitter side of connection code L

Note 2: Not available with capillary protection code A, B

Note 3: Not available with capillary protection code N

Note 4: Suitable for oxygen service

Note 5: Suitable for food application



**BASIC ORDERING INFORMATION model S26WA Wafer diaphragm seal to ASME B16.5**

Select one character or set of characters from each category and specify complete catalog number.

BASE MODEL - 1 <sup>st</sup> to 5 <sup>th</sup> characters	S	2	6	W	A	X	XX	X	XX	X	X	X	X	X
Wafer diaphragm seal to ASME B16.5														
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character														
High pressure side						H								
Low pressure side						L								
<b>Mounting Flange Rating / Size</b> - 7 <sup>th</sup> and 8 <sup>th</sup> characters														
ASME 1 1/2 in.								D5						
ASME 2 in.								E5						
ASME 3 in.								G5						
<b>Extensions Length and Material</b> - 9 <sup>th</sup> character														
Flush										F				
<b>Diaphragm Material</b> - 10 <sup>th</sup> and 11 <sup>th</sup> characters														
AISI 316 L ss						NACE				SM				
AISI 316 L ss - Low thickness						NACE				SL				
Hastelloy C-276						NACE				HM				
Hastelloy C-276 - Low thickness						NACE				HL				
Hastelloy C-2000						NACE				MM				
Inconel 625						NACE				LM				
Tantalum										TM				
AISI 316 L ss gold plated						NACE				NM				
AISI 316 L ss with PFA anti-stick coating						NACE				KM				
Hastelloy C-276 with PFA anti-stick coating						NACE				YM				
AISI 316 L ss with PFA coating anti-corrosion and anti-stick						NACE				WM				
Diaflex (AISI with anti-abrasion treatment)						NACE				FM				
Superduplex ss (UNS S32750 to ASTM SA479)						NACE				EM				
Monel						NACE				GM				
<b>Seal Surface Finish</b> - 12 <sup>th</sup> character														
Serrated						(Note 1)				1				
Smooth										2				
<b>Capillary Protection</b> - 13 <sup>th</sup> character														
AISI 316 L ss armour														A
AISI 316 L ss armour with PVC protective cover														B

continued  
see next page

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

BASIC ORDERING INFORMATION model S26WA			S	2	6	W	A	X	XX	XX	XX	X	X	X	X	X																	
<b>Capillary Length m (Feet)</b> - 14 <sup>th</sup> character																																	
1 (3)													A																				
1.5 (5)													B																				
2 (7)													C																				
2.5 (8)													D																				
3 (10)													E																				
3.5 (12)													F																				
4 (13)													G																				
4.5 (15)													H																				
5 (17)													J																				
5.5 (18)													K																				
6 (20)													L																				
6.5 (22)													M																				
7 (23.5)													N																				
7.5 (25)													P																				
8 (27)													Q																				
9 (30)													R																				
10 (33)													S																				
12 (40)													T																				
14 (47)													U																				
16 (53)													V																				
<b>Fill Fluid</b> - 15 <sup>th</sup> character																																	
Silicone oil PMX 200 10 cSt																																S	
Silicone oil Baysilone PD5 5 cSt																																P	
Inert oil - Galden G5																																N	
Inert oil - Halocarbon 4.2																																	D
Silicone oil for high temperature																																	G
Silicone polymer Syltherm XLT																																	C
Mineral oil Esso Marcol 152																																	W
Vegetable oil Neobee M-20																																	A
Glycerin-water 70%																																	B

continued  
see next page

**BASIC ORDERING INFORMATION model S26WA**

**S 2 6 W A X XX X XX X X X X X**

**X X X**

**Flushing Ring: Hole and Thread - 16<sup>th</sup> character**

None				N
1 hole - 1/2 in. NPT				2
2 holes - 1/2 in. NPT				3
1 hole - 1/4 in. NPT				4
2 holes - 1/4 in. NPT				5

**Flushing Ring Material - 17<sup>th</sup> character**

None	(Note 4)			N
AISI 316 L ss	(Note 5)	NACE		A
Hastelloy C-276	(Notes 5, 6)	NACE		H

**Flushing Ring: Plug and Gasket - 18<sup>th</sup> character**

No plug - No gasket				N
No plug - garlock	(Note 5)			A
No plug - PTFE	(Note 5)			B
No plug - graphite	(Note 5)			C
AISI 316 L ss - no gasket	(Notes 5, 7)	NACE		D
AISI 316 L ss - garlock	(Notes 5, 7)	NACE		E
AISI 316 L ss - PTFE	(Notes 5, 7)	NACE		F
AISI 316 L ss - graphite	(Notes 5, 7)	NACE		G
Hastelloy C-276 - no gasket	(Notes 5, 8)	NACE		H
Hastelloy C-276 - garlock	(Notes 5, 8)	NACE		L
Hastelloy C-276 - PTFE	(Notes 5, 8)	NACE		M
Hastelloy C-276 - graphite	(Notes 5, 8)	NACE		P

- Note 1: Not available with diaphragm material code MM, LM, TM, NM, KM, YM, WM
- Note 2: Suitable for oxygen service
- Note 3: Suitable for food application
- Note 4: Not available with Flushing ring: hole and thread code 2, 3, 4, 5
- Note 5: Not available with Flushing ring: hole and thread code N
- Note 6: Not available with Seal surface finish code 1
- Note 7: Not available with Hastelloy C-276 flushing ring material code H
- Note 8: Not available with AISI 316 L flushing ring material code A

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

### BASIC ORDERING INFORMATION model S26WE Wafer diaphragm seal to EN 1092-1

Select one character or set of characters from each category and specify complete catalog number.

BASE MODEL - 1 <sup>st</sup> to 5 <sup>th</sup> characters	S	2	6	W	E	X	XX	X	XX	X	X	X	X	X
Wafer diaphragm seal to EN 1092-1														
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character														
High pressure side						H								
Low pressure side						L								
<b>Mounting Flange Rating / Size</b> - 7 <sup>th</sup> and 8 <sup>th</sup> characters														
EN 1092-1 DN 40							M5							
EN 1092-1 DN 50							N5							
EN 1092-1 DN 80							P5							
<b>Extensions Length and Material</b> - 9 <sup>th</sup> character														
Flush									F					
<b>Diaphragm Material</b> - 10 <sup>th</sup> and 11 <sup>th</sup> characters														
AISI 316 L ss						NACE				SM				
AISI 316 L ss - Low thickness						NACE				SL				
Hastelloy C-276						NACE				HM				
Hastelloy C-276 - Low thickness						NACE				HL				
Hastelloy C-2000						NACE				MM				
Inconel 625						NACE				LM				
Tantalum										TM				
AISI 316 L ss gold plated						NACE				NM				
AISI 316 L ss with PFA anti-stick coating						NACE				KM				
Hastelloy C-276 with PFA anti-stick coating						NACE				YM				
AISI 316 L ss with PFA coating anti-corrosion and anti-stick						NACE				WM				
Diaflex (AISI with anti-abrasion treatment)						NACE				FM				
Superduplex ss (UNS S32750 to ASTM SA479)						NACE				EM				
Monel						NACE				GM				
<b>Seal Surface Finish</b> - 12 <sup>th</sup> character														
Serrated (Note 1)											1			
Smooth											2			
Form E - Spigot type (Note 2)											4			
Form D - Groove type (Note 3)											6			
<b>Capillary Protection</b> - 13 <sup>th</sup> character														
AISI 316 L ss armour													A	
AISI 316 L ss armour with PVC protective cover														B

continued  
see next page

**BASIC ORDERING INFORMATION model S26WE**

**S 2 6 W E X XX X XX X X**

**X**

**X**

**X**

**X**

**X**

**Capillary Length m (Feet) - 14<sup>th</sup> character**

1 (3)	A
1.5 (5)	B
2 (7)	C
2.5 (8)	D
3 (10)	E
3.5 (12)	F
4 (13)	G
4.5 (15)	H
5 (17)	J
5.5 (18)	K
6 (20)	L
6.5 (22)	M
7 (23.5)	N
7.5 (25)	P
8 (27)	Q
9 (30)	R
10 (33)	S
12 (40)	T
14 (47)	U
16 (53)	V

continued  
see next page

**Fill Fluid - 15<sup>th</sup> character**

Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)		S
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)		P
Inert oil - Galden G5	(Oxygen service)	(Note 4)	N
Inert oil - Halocarbon 4.2	(Oxygen service)	(Note 4)	D
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)		G
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)		C
Mineral oil Esso Marcol 152	(FDA approved)	(Note 5)	W
Vegetable oil Neobee M-20	(FDA approved)	(Note 5)	A
Glycerin-water 70%	(FDA approved)	(Note 5)	B

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

BASIC ORDERING INFORMATION model S26WE		S	2	W	E	X	X	X	X	X	X	X	X	X	X	X	X
<b>Flushing Ring: Hole and Thread</b> - 16 <sup>th</sup> character																	
None																	N
1 hole - 1/2 in. NPT	(Note 6)																2
2 holes - 1/2 in. NPT	(Note 6)																3
1 hole - 1/4 in. NPT	(Note 6)																4
2 holes - 1/4 in. NPT	(Note 6)																5
<b>Flushing Ring Material</b> - 17 <sup>th</sup> character																	
None	(Note 7)																N
AISI 316 L ss	(Note 8)									NACE							A
Hastelloy C-276	(Notes 8, 9)									NACE							H
<b>Flushing Ring: Plug and Gasket</b> - 18 <sup>th</sup> character																	
No plug - No gasket																	N
No plug - garlock	(Note 8)																A
No plug - PTFE	(Note 8)																B
No plug - graphite	(Note 8)																C
AISI 316 L ss - no gasket	(Notes 8, 10)									NACE							D
AISI 316 L ss - garlock	(Notes 8, 10)									NACE							E
AISI 316 L ss - PTFE	(Notes 8, 10)									NACE							F
AISI 316 L ss - graphite	(Notes 8, 10)									NACE							G
Hastelloy C-276 - no gasket	(Notes 8, 11)									NACE							H
Hastelloy C-276 - garlock	(Notes 8, 11)									NACE							L
Hastelloy C-276 - PTFE	(Notes 8, 11)									NACE							M
Hastelloy C-276 - graphite	(Notes 8, 11)									NACE							P

Note 1: Not available with diaphragm material code MM, LM, TM, NM, KM, YM, WM  
 Note 2: Not available with diaphragm material code SM, HM, MM, LM, TM, NM, KM, YM, WM, FM, EM  
 Note 3: Not available with diaphragm material code SM, HM, HL, MM, LM, TM, NM, KM, YM, WM, FM, EM  
 Note 4: Suitable for oxygen service  
 Note 5: Suitable for food application  
 Note 6: Not available with Seal surface finish code 4, 6  
 Note 7: Not available with Flushing ring: hole and thread code 2, 3, 4, 5  
 Note 8: Not available with Flushing ring: hole and thread code N  
 Note 9: Not available with Seal surface finish code 1  
 Note 10: Not available with Hastelloy C-276 flushing ring material code H  
 Note 11: Not available with AISI 316 L flushing ring material code A

**BASIC ORDERING INFORMATION model S26CN Chemical Tee diaphragm seal**

Select one character or set of characters from each category and specify complete catalog number.

<b>BASE MODEL</b> - 1 <sup>st</sup> to 5 <sup>th</sup> characters	<b>S 2 6 C N</b>	<b>X</b>	<b>XX</b>	<b>XX</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
Chemical Tee seal								
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character								
High pressure side		H						
Low pressure side		L						
<b>Mounting Flange Rating / Size</b> - 7 <sup>th</sup> and 8 <sup>th</sup> characters								
Integral with seal / 3 in. Proprietary				GP				
<b>Diaphragm Material</b> - 9 <sup>th</sup> and 10 <sup>th</sup> characters								
AISI 316 L ss	NACE			SM				
Hastelloy C-276	NACE			HM				
AISI 316 L ss with PFA anti-stick coating	NACE			KM				
Hastelloy C-276 with PFA anti-stick coating	NACE			YM				
AISI 316 L ss with PFA coating anti-corrosion and anti-stick	NACE			WM				
Diaflex (AISI with anti-abrasion treatment)	NACE			FM				
<b>Capillary Protection</b> - 11 <sup>th</sup> character								
AISI 316 L ss armour							A	
AISI 316 L ss armour with PVC protective cover							B	
<b>Capillary Length m (Feet)</b> - 12 <sup>th</sup> character								
1 (3)								A
1.5 (5)								B
2 (7)								C
2.5 (8)								D
3 (10)								E
3.5 (12)								F
4 (13)								G
4.5 (15)								H
5 (17)								J
6 (20)								L
7 (23.5)								N
8 (27)								Q
<b>Fill Fluid</b> - 13 <sup>th</sup> character								
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)							S
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)							P
Inert oil - Galden G5	(Oxygen service)	(Note 1)						N
Inert oil - Halocarbon 4.2	(Oxygen service)	(Note 1)						D
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)							G
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)							C
Mineral oil Esso Marcol 152	(FDA approved)	(Note 2)						W
Vegetable oil Neobee M-20	(FDA approved)	(Note 2)						A
Glycerin-water 70%	(FDA approved)	(Note 2)						B
<b>Gasket</b> - 14 <sup>th</sup> character								
None								1
PTFE with silica filler								6
Graphite								7

Note 1: Suitable for oxygen service  
 Note 2: Suitable for food application

# Model 266DRH Differential

# Model 266HRH Gauge

# Model 266NRH Absolute

## BASIC ORDERING INFORMATION model S26BN Button type remote diaphragm seals

Select one character or set of characters from each category and specify complete catalog number.

<b>BASE MODEL</b> - 1 <sup>st</sup> to 5 <sup>th</sup> characters	S 2 6 B N	X	X	X	XX	X	X	X	X	X
Button type remote diaphragm seal										
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character										
High pressure side										
		H								
<b>Size</b> - 7 <sup>th</sup> character										
1 in.										
										M
<b>Mounting connection type</b> - 8 <sup>th</sup> character										
3 1/4 in. flange extended – type 91										
										A
3 1/2 in. flange extended – type 91 modified										
										B
1 1/2 in. 16N-2 threaded union – type 92										
										C
Bracket – type 89										
										D
Universal – type 90										
										E
1 1/2 in. 12NF threaded union – type 92 modified										
										F
<b>Diaphragm Material</b> - 9 <sup>th</sup> and 10 <sup>th</sup> characters										
Hastelloy C-276										
										NACE HL
<b>Capillary Protection</b> - 11 <sup>th</sup> character										
AISI 316 L ss armour										
										A
AISI 316 L ss armour with PVC protective cover										
										B
<b>Capillary Length m (Feet)</b> - 12 <sup>th</sup> character										
1 (3)										
										A
1.5 (5)										
										B
2 (7)										
										C
2.5 (8)										
										D
3 (10)										
										E
<b>Fill Fluid</b> - 13 <sup>th</sup> character										
Silicone oil PMX 200 10 cSt (-40 to 250 °C; -40 to 480 °F)										
										S
Silicone oil for high temperature (-10 to 375 °C; 14 to 707 °F)										
										G
Mineral oil Esso Marcol 152 (FDA approved)										
										(Note 1) W
<b>Option</b> - 14 <sup>th</sup> character										
None										
										1
Jack out collar for seal removal for process (not for type 89)										
										(Note 2) 2
<b>Gasket</b> - 15 <sup>th</sup> character										
None										
										1
Aluminium										
										E
AISI 316 ss										
										F

Note 1: Suitable for food application

Note 2: Not available with mounting connection types code D



**BASIC ORDERING INFORMATION model S26UN Union connection remote diaphragm seals**

Select one character or set of characters from each category and specify complete catalog number.

<b>BASE MODEL</b> - 1 <sup>st</sup> to 5 <sup>th</sup> characters	S	2	6	U	N	X	X	XX	X	X	X	X	X
Union connection remote diaphragm seal													
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character													
High pressure side						H							
<b>Size</b> - 7 <sup>th</sup> character													
1 1/2 in.								L					
<b>Diaphragm Material</b> - 8 <sup>th</sup> and 9 <sup>th</sup> characters													
AISI 316 L ss						NACE		SL					
Hastelloy C-276						NACE		HL					
<b>Capillary Protection</b> - 10 <sup>th</sup> character													
AISI 316 L ss armour										A			
AISI 316 L ss armour with PVC protective cover										B			
<b>Capillary Length m (Feet)</b> - 11 <sup>th</sup> character													
1 (3)											A		
1.5 (5)											B		
2 (7)											C		
2.5 (8)											D		
3 (10)											E		
3.5 (12)											F		
4 (13)											G		
4.5 (15)											H		
5 (17)											J		
<b>Fill Fluid</b> - 12 <sup>th</sup> character													
Silicone oil PMX 200 10 cSt (-40 to 250 °C; -40 to 480 °F)												S	
Silicone oil Baysilone PD5 5 cSt (-85 to 250 °C; -121 to 480 °F)												P	
Inert oil - Galden G5 (Oxygen service) (Note 1)												N	
Inert oil - Halocarbon 4.2 (Oxygen service) (Note 1)												D	
Silicone oil for high temperature (-10 to 375 °C; 14 to 707 °F)												G	
Silicone polymer Syltherm XLT (-100 to 100 °C; -148 to 212 °F)												C	
Mineral oil Esso Marcol 152 (FDA approved) (Note 2)												W	
Vegetable oil Neobee M-20 (FDA approved) (Note 2)												A	
Glycerin-water 70% (FDA approved) (Note 2)												B	
<b>Process Fitting Connections</b> - 13 <sup>th</sup> character													
Not required													1
AISI 316 ss weld bushing													3
Chemical tee flange													4
<b>Gasket</b> - 14 <sup>th</sup> character													
Not required													1
Silicone rubber													5
PTFE													8

Note 1: Suitable for oxygen service  
 Note 2: Suitable for food application

# Model 266DRH Differential

# Model 266HRH Gauge

# Model 266NRH Absolute

## BASIC ORDERING INFORMATION model S26PN urea service remote diaphragm seals

Select one character or set of characters from each category and specify complete catalog number.

<b>BASE MODEL</b> - 1 <sup>st</sup> to 5 <sup>th</sup> characters	<b>S 2 6 P N</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>XX</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
Urea service remote diaphragm seal									
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character									
High pressure side		H							
Low pressure side		L							
<b>Size / Mounting Flange Rating / Material</b> - 7 <sup>th</sup> character									
3 in. / ASME 600 RF integral flange / AISI 316 L ss Urea Grade			H						
2 in. / ASME 2500 threaded flange / Carbon steel			J						
<b>Extension length / diameter</b> - 8 <sup>th</sup> character									
40.3 mm (1.59 in.) / 69 mm (2.71 in.)	(Note 1)			R					
40.3 mm (1.59 in.) / 94 mm (3.7 in.)	(Note 1)			S					
131 mm (5.16 in.) / 37.5 mm (1.47 in.)	(Note 2)			T					
<b>Diaphragm Material</b> - 9 <sup>th</sup> and 10 <sup>th</sup> characters									
AISI 316 L ss Urea Grade					SM				
<b>Capillary Protection</b> - 11 <sup>th</sup> character									
AISI 316 L ss armour							A		
AISI 316 L ss armour with PVC protective cover							B		
<b>Capillary Length m (Feet)</b> - 12 <sup>th</sup> character									
1 (3)								A	
1.5 (5)								B	
2 (7)								C	
2.5 (8)								D	
3 (10)								E	
3.5 (12)								F	
4 (13)								G	
4.5 (15)								H	
5 (17)								J	
5.5 (18)	(Note 1)							K	
6 (20)	(Note 1)							L	
<b>Fill Fluid</b> - 13 <sup>th</sup> character									
Silicone oil PMX 200 10 cSt (-40 to 250 °C; -40 to 480 °F)									S
Silicone oil for high temperature (-10 to 375 °C; 14 to 707 °F)									G
<b>Certification</b> - 14 <sup>th</sup> character									
None									1
Huey test									3

Note 1: Not available with Size/Mounting flange code J

Note 2: Not available with Size/Mounting flange code H

**BASIC ORDERING INFORMATION model S26KN Pulp and paper diaphragm seals**

Select one character or set of characters from each category and specify complete catalog number.

<b>BASE MODEL</b> - 1st to 5th characters	<b>S 2 6 K N</b>	<b>X</b>	<b>X</b>	<b>XX</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
Pulp and paper diaphragm seal								
<b>Transmitter Side of Connection</b> - 6th character								
High pressure side								
<b>Size / Mounting connection</b> - 7th character								
1 in. pulp and paper seal - sealing with gaskets to spud (NOT AVAILABLE WITH SENSOR F AND S)								
1 1/2 in. pulp and paper seal - sealing with gasket to spud (NOT AVAILABLE WITH SENSOR S)								
1 in. pulp and paper seal with 1 in. NPT male threaded connection (NOT AVAILABLE WITH SENSOR F)								
1 1/2 in. pulp and paper seal with 1 1/2 in. NPT male threaded connection								
1 in. pulp and paper seal with G 1 in. A male threaded connection (NOT AVAILABLE WITH SENSOR F)								
1 1/2 in. pulp and paper seal with G 1 1/2 in. A male threaded connection								
1 in. pulp and paper seal with ball valve connection (NOT AVAILABLE WITH SENSOR F AND S and 266NRH)								
1 1/2 in. pulp and paper seal - sealing with gasket to M44 threaded spud (NOT AVAILABLE WITH SENSOR S)								
<b>Diaphragm Material</b> - 8th and 9th characters								
AISI 316 L ss (Note 1)								
Hastelloy C-276								
Diaflex (AISI with anti-abrasion treatment) (Note 1)								
<b>Capillary Protection</b> - 10th character								
Extension tube for direct mount seal								
<b>Capillary Length m (Feet)</b> - 11th character								
Direct-mount construction								
<b>Fill Fluid</b> - 12th character								
Silicone oil PMX 200 10 cSt (-40 to 250 °C; -40 to 480 °F)								
Mineral oil Esso Marcol 152 (FDA approved) (Note 5)								
<b>Clamp/Fittings</b> - 13th character								
Not required								
Weld-on spud and fixing screw for 1 in. pulp & paper seal connection (Note 2)								
Weld-on threaded spud for 1 1/2 in. pulp & paper seal connection (Note 3)								
Weld-on spud and fixing screws for 1 1/2 in. pulp & paper seal connection (Note 4)								

Note 1: Not available with connection code Y

Note 2: Suitable ONLY for 1 in. size - sealing with gaskets code U

Note 3: Suitable ONLY for 1-1/2 in. size to M44 threaded spud - sealing with gaskets code V

Note 4: Suitable ONLY for 1-1/2 in. size - sealing with gaskets code K

Note 5: Suitable for food application

# Model 266DRH Differential

# Model 266HRH Gauge

# Model 266NRH Absolute

## BASIC ORDERING INFORMATION model S26JN In-line diaphragm seals

Select one character or set of characters from each category and specify complete catalog number.

<b>BASE MODEL</b> - 1 <sup>st</sup> to 5 <sup>th</sup> characters	<b>S 2 6 J N</b>	<b>X</b>	<b>X</b>	<b>XX</b>	<b>X</b>	<b>X</b>	<b>X</b>
In-line diaphragm seal							
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character							
High pressure side		H					
<b>Size / Mounting connection</b> - 7 <sup>th</sup> character							
DN 25 / 1 in.			A				
DN 40 / 1 1/2 in.			B				
DN 50 / 2 in.			C				
DN 80 / 3 in.			D				
<b>Diaphragm Material</b> - 8 <sup>th</sup> and 9 <sup>th</sup> characters							
AISI 316 L ss	NACE			SM			
Hastelloy C-276	NACE			HM			
<b>Capillary Protection</b> - 10 <sup>th</sup> character							
Extension tube for direct mount seal						N	
<b>Capillary Length m (Feet)</b> - 11 <sup>th</sup> character							
Direct-mount construction							1
<b>Fill Fluid</b> - 12 <sup>th</sup> character							
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)						S
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)						P
Inert oil - Galden G5	(Oxygen service)	(Note 1)					N
Inert oil - Halocarbon 4.2	(Oxygen service)	(Note 1)					D
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)						G
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)						C
Mineral oil Esso Marcol 152	(FDA approved)	(Note 2)					W
Vegetable oil Neobee M-20	(FDA approved)	(Note 2)					A
Glycerin-water 70%	(FDA approved)	(Note 2)					B

Note 1: Suitable for oxygen service

Note 2: Suitable for food application

### **IMPORTANT REMARK FOR ALL MODELS**

THE SELECTION OF SUITABLE WETTED PARTS AND FILLING FLUID FOR COMPATIBILITY WITH THE PROCESS MEDIA IS A CUSTOMER'S RESPONSIBILITY, IF NOT OTHERWISE NOTIFIED BEFORE MANUFACTURING.

### **NACE COMPLIANCE INFORMATION**

- (1) The materials of constructions comply with metallurgical recommendations of NACE MR0175/ISO 15156 for sour oil field production environments. As specific environmental limits may apply to certain materials, please consult latest standard for further details. AISI 316/316 L, Hastelloy C-276, Monel 400 also conform to NACE MR0103 for sour refining environments.
- (2) NACE MR-01-75 addresses bolting requirements in two classes:
  - Exposed bolts: bolts directly exposed to the sour environment or buried, encapsulated or anyway not exposed to atmosphere
  - Non exposed bolts: the bolting must not be directly exposed to sour environments and must be directly exposed to the atmosphere at all times.

266DRH bolting identified by "NACE" are in compliance with requirements of NACE MR0175 when considered "exposed bolting".

- ® Hastelloy is a registered trademark of Haynes International
- ® Monel and Inconel are registered trademarks of Special Metals Corporation
- ® Viton is a registered trademark of E.I. DuPont de Nemour
- ® PMX 200 and Syltherm are registered trademarks of Dow Corning Corporation
- ® Galden is a registered trademark of Solvay Group
- ® Halocarbon is a registered trademark of Halocarbon Products Co.
- ® Baysilone is a registered trademark of Bayer
- ® Neobee is a registered trademark Stepan Specialty Products, LCC
- ® Esso Marco 152 is a registered trademark Esso Italiana
- ® HART and WirelessHART are registered trademarks of HART Communication Foundation
- ® PROFIBUS is a registered trademark of Profibus International
- ™ FOUNDATION Fieldbus is a trademark of Fieldbus Foundation

Model 266DRH Differential  
Model 266HRH Gauge  
Model 266NRH Absolute



# Contact us

## **ABB Ltd.**

### **Industrial Automation**

Howard Road  
St. Neots  
Cambridgeshire PE19 8EU  
UK  
Tel: +44 (0)1480 475321  
Fax: +44 (0)1480 217948

## **ABB Inc.**

### **Industrial Automation**

125 E. County Line Road  
Warminster  
PA 18974  
USA  
Tel: +1 215 674 6000  
Fax: +1 215 674 7183

## **ABB Automation Products GmbH**

### **Industrial Automation**

Schillerstr. 72  
32425 Minden  
Germany  
Tel: +49 551 905 534  
Fax: +49 551 905 555

## **ABB S.p.A.**

### **Industrial Automation**

Via Luigi Vaccani 4  
22016 Tremezzina (CO)  
Italy  
Tel: +39 0344 58111

[www.abb.com](http://www.abb.com)

## Note

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents - in whole or in parts - is forbidden without prior written consent of ABB.

Copyright© 2017 ABB

All rights reserved  
3KXP200016R1001



Sales



Service



Software